


Item:
MEUHB-100/125/150-40/50K
MEUHB-150/200/240-40/50K

CCT & Wattage Selectable Integrated
LED UFO High Bay Light Fixture

Our UFO high bay light is a cost-efficient solution and great replacement for metal halides, HID or CFL Bulbs. Upgrading to LED can save your money on your electricity bill, improve visibility, help you work safely, and enhance productivity.

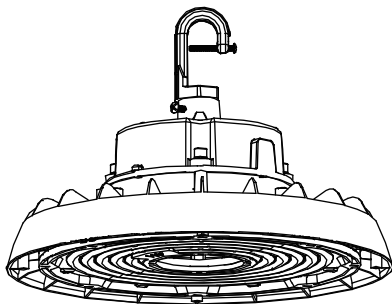

Safety Instruction

⚠ WARNING

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

⚠ WARNING


- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.

⚠ CAUTION

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn. Disconnect power and allow fixture to cool before changing bulb or handling fixture.

NOTICE: Green ground screw provided in proper location. Do not relocate.
NOTICE: Minimum 90° supply conductors.
NOTICE: Specifications and dimensions subject to change without notice.
NOTICE: Suitable for Wet location

Tools Required

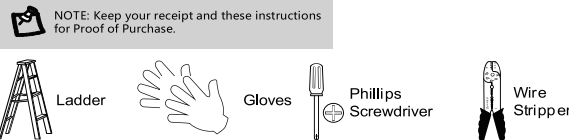


Optional fittings:



	PARTS	pcs
A	Hook	1
B	WIRE NUT	5
C	LED Fixture	1

Optional fittings:




PC Reflector -16.1" for MEUHB-100/125/150-40/50K
PC Reflector -18.9" for MEUHB-150/200/240-40/50K



PC Reflector Bottom Cap-15.91" for MEUHB-100/125/150-40/50K
PC Reflector Bottom Cap-18.7" for MEUHB-150/200/240-40/50K


Electrical Schematic Diagram

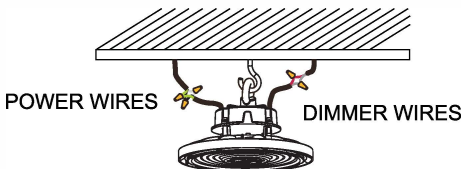

Connect the black wire(Live Wire), white (Neutral wire) and green wire (Ground) to the appropriate wire inside Junction box.


To make the fixture dimmable, please connect 0-10V dimmer(not include) with the dimming signal of fixture, connect DIM+ port and DIM- port with corresponding line on the dimmer.

Without any function,0-10V Dimming wiring diagram




INSTALLATION GUIDE

Fig:1




1. Tighten the hook clockwise

Fig:2




2. Tighten the short screw

Fig:3



3. Hang the light

Fig:4




4. Tighten the long screw

INSTALLATION GUIDE

CCT and Watts Selected Operation Manual

1. Open the silicone cover of the CCT or power DIP switch respectively.
2. Toggle the DIP switch to the corresponding gear to achieve the required CCT and power conversion

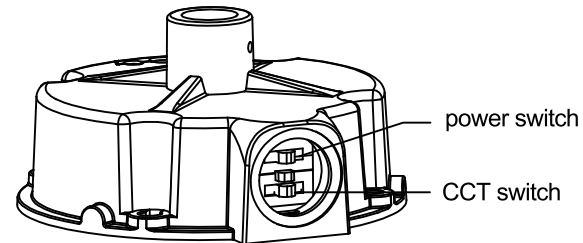


NOTED:

MEUHB-100/125/150-40/50K Factory Setting: 150W, 5000K
MEUHB-150/200/240-40/50K Factory Setting: 240W, 5000K

INSTALLATION GUIDE

DIFFUSER AND LENS INSTALLATION (Sold Separately)

1. Install the diffuser, tighten the screws
2. Attach the conical lens to the included clamp.

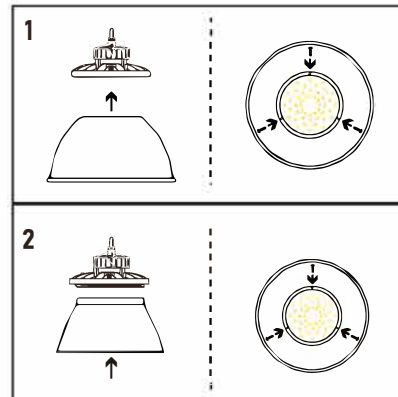

WARRANTY

This product is warranted for 5 years from the date of purchase. If this product does not perform to the specifications supplied on this package, send an email to support@runbisonlighting.com for product return and replacement. This replacement is the sole remedy available. Liability for incidental or consequential damage is expressly excluded.