


Item: HT-G2LHB-1.4FT2L-F811S/277-240D

LED HIGH BAY

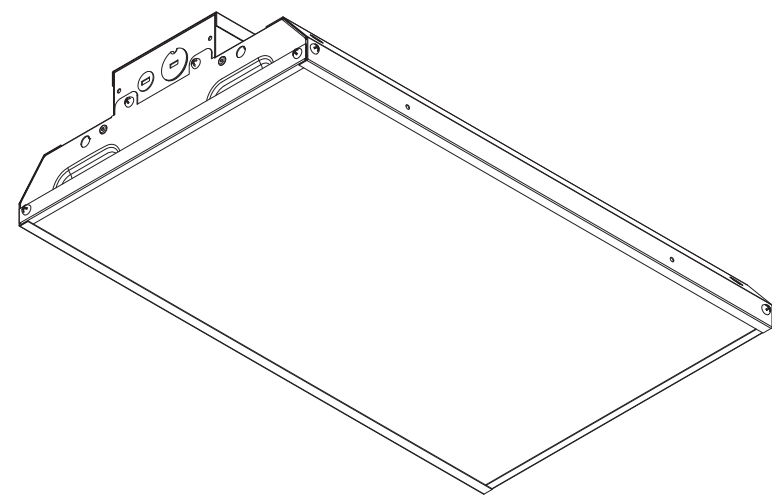

SAFETY INSTRUCTION

⚠ WARNING

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts, abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions:
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during its installation.

⚠ WARNING

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.

⚠ CAUTION

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn: Disconnect power and allow fixture to cool before changing bulb or handling fixture.

NOTICE: Green ground screw provided in proper location. Do not relocate.


NOTICE: Minimum 18" supply conductors.

NOTICE: Specifications and dimensions subject to change without notice.

NOTICE: Suitable for dry or damp location.

TOOLS REQUIRED

⚠ Safety and First Aid Warnings and First Aid Instructions are on the Fixture Box




PACKAGE CONTENT

A

B

C

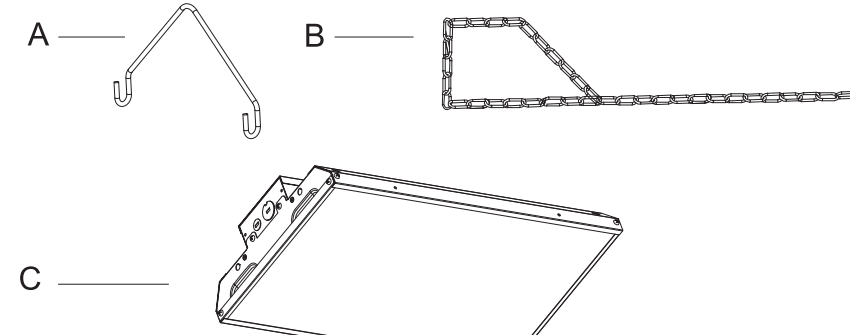

	PARTS	QTY
A	hook	2
B	chain	2
C	LED fixture	1

INSTALLATION INSTRUCTION

General Wiring Diagram

120-277v

Black(Line)

White(Neutral)

Green(Gnd)

LED DRIVER

Purple(Dim+)


Pink(Dim-)

Black(-)

Red(+)

Dimming wire to 0-10V IEC compliant control


Lead wire to LED load

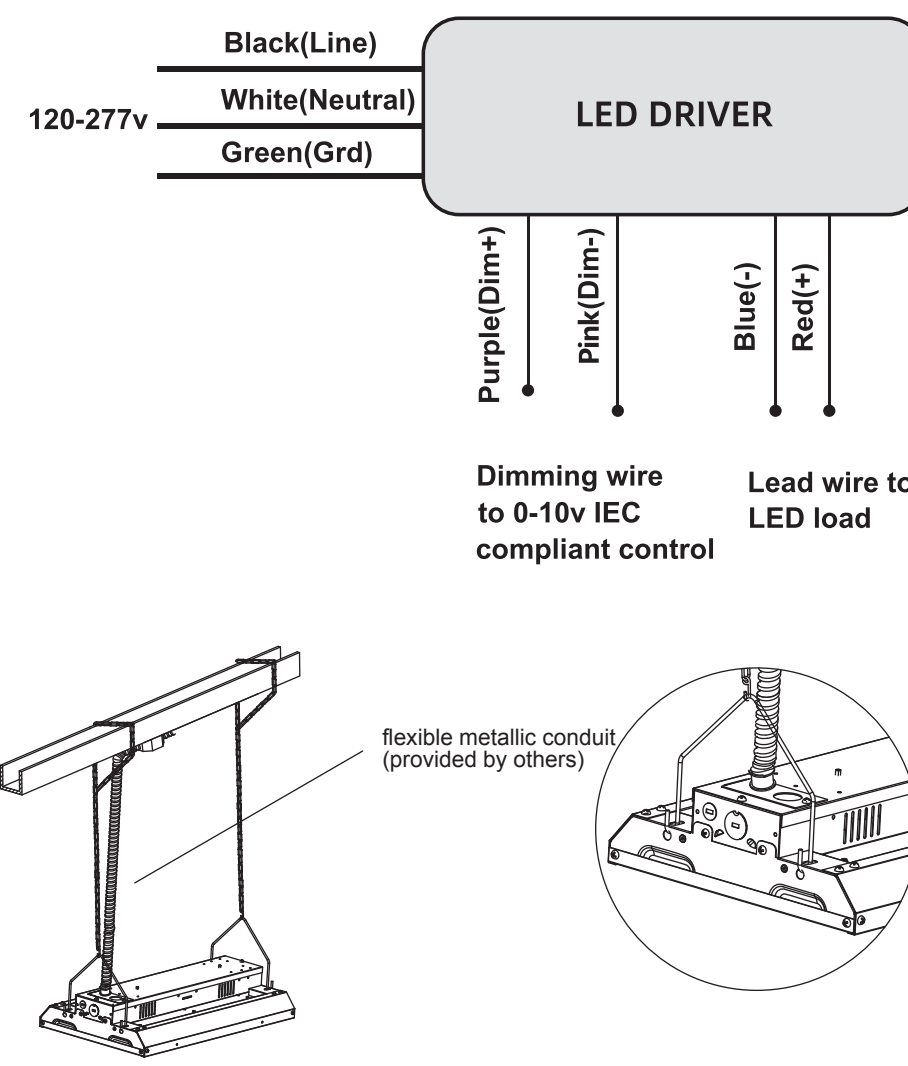

flexible metallic conduit (provided by others)

INSTALLATION INSTRUCTION

Field-Adjustable CCT

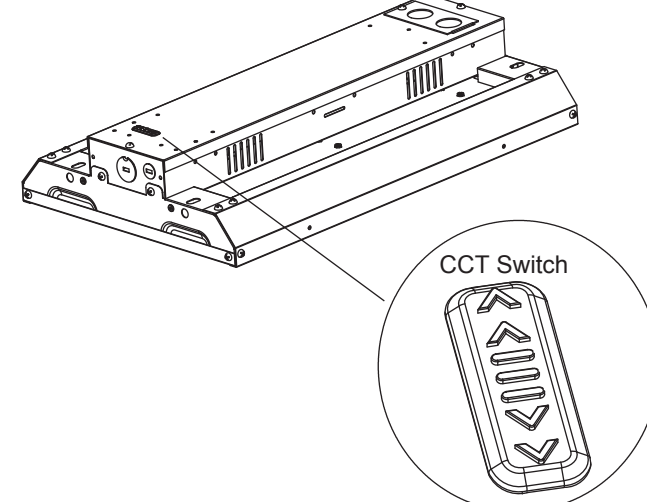

The end users may adjust the color temperature by the DIP switch buttons integrated into the driver. The DIP switch is accommodated with 2 options (left and right), corresponding to 2 color temperatures, which can perform the desired color temperatures.

Factory Setting: 5000K.

1. DIP switch is located onto the side of the fixture.

2. Select color temperature by sliding switch left or right to the desired value.

Installation Step:

Always turn off the power supply from main circuit breaker first!

Chain-mounting with V-hook

Step1: Clip the brackets to the sides of fixture

Step2: Attach provided V-hooks to brackets

Step3: Attach provided chain to the V-hooks and mounting surface.

*NOTE: Purple and pink lead inside the driver compartment are 0-10V (low voltage) dimming leads. Connect to dimming low voltage wiring only.

*Clean all residues/fingerprints from the new LED high bay and lens. Double check all hanging hardware before moving onto the next installation.

WARRANTY

This product is warranted for 5 years from the date of purchase.