



SKU/THD.com #
Model # HOTC6210BB1D


USE AND CARE GUIDE

HUSKY HD 62 IN. 10-DRAWER MOBILE WORKBENCH

Questions, problems, missing parts?
Before returning to the store, call
Husky Customer Service
8 a.m. - 7 p.m., EST, Monday-Friday
9 a.m. - 6 p.m., EST, Saturday

1 888 HD-HUSKY

HUSKYTOOLS.COM

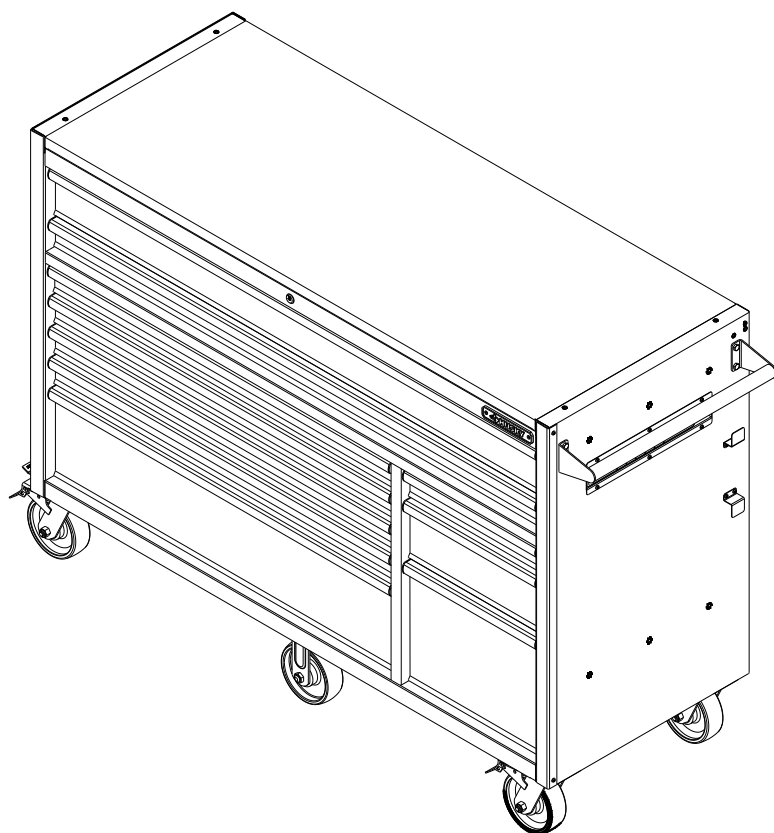

THANK YOU

We appreciate the trust and confidence you have placed in Husky through the purchase of this mobile workbench. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Husky!

Table of Contents

Table of Contents	2
Safety Information	2-3
Warranty	3
Pre-Assembly	4
Tools Required	4
Hardware Included	4
Specifications	4
Package Contents	5

Assembly	6
Operation	7
Maintenance	8
Care and Cleaning	8
Service Parts	9

Safety Information

1. Do not open more than one drawer at a time.
2. Do not let children approach the product.
3. To help prevent the product from tipping, load the product starting with the bottom drawers.
4. Keep locking the casters' brake set unless you are moving the cabinet. This will help to prevent the product from rolling.
5. Lock all drawers before moving the product.
6. Make sure all drawers close tightly before locking/unlocking.
7. Do not step in any drawer/drawers.
8. When moving this product, push it rather than pull it.
9. Do not alter this product in any manner.

Plug and Outlet Safety




WARNING: Chest/cabinet plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earth (grounded) chest/cabinet power strips. Unmodified plugs and matching outlets will reduce risk of electric shock.



WARNING: Avoid body contact with earthed or grounded surfaces such as pipes, radiators, ranges and refrigerators. There is increased risk of electric shock if your body is earthed or grounded.



WARNING: Chests/cabinets marked "Grounding Required" have a power strip with a three wire cord and three prong grounding plug. The plug must be connected to a properly grounded outlet (See Figure). If the power strip should electrically malfunction or break down, grounding provides a low resistance path to carry electricity away from the user, reducing the risk of electric shock. The grounding prong in the plug is connected through the green wire inside the cord to the grounding system in the power strip. The green wire in the cord must be the only wire connected to the power strip's grounding system and must never be attached to an electrically "live" terminal. Your power strip must be plugged into an appropriate outlet, properly installed and grounded in accordance with all codes and ordinances.



DANGER: Do not stand on this product. You may fall or cause the product to tip.



DANGER: Do not move the product prior to closing and locking all the drawers. The drawers could come open and make the product unstable and tip.



DANGER: Do not mount this product on a truck bed or any other moving object.



WARNING: Keep the product on a level surface. The product may become unstable and tip if stored or moved on an uneven surface.



CAUTION: Do not lift this product directly with a forklift or tow with any mechanical devices.



CAUTION: Do not exceed the maximum product weight, including contents. Do not exceed the maximum weight for each drawer. See Specifications on page 4.



CAUTION: Only transport this product when empty. Properly secure when transporting.

Safety Information (continued)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.



NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



CAUTION: Do not use the side handle as a point of leverage to lift the unit off of the ground. Handle is not intended to withstand the force of vertical lifting, and is only designed to aid in the movement of unit around on casters. Failure to adhere to this warning may cause handle to break and cause personal injury and/or product damage.

The Responsible party information:

Clearwater Metal Vn JSC

Lot CN2, Mai Trung IZ, An Tay Village, Ben Cat Town, Binh Duong Province, Vietnam. Tel: +84.274.3581.773

Product name: Power strip 6 outlets with 2 USB ports
Model# K2415009 / K2415014 / K2415021

Warranty

The manufacturer warrants the product to be free from defects in materials and workmanship for a period of five (5) years from date of purchase. This warranty applies only to the original consumer and only to products used in normal use and service. If this product is found to be defective, the manufacturer's only obligation, and your exclusive remedy, is the repair or replacement of the product at the manufacturer's discretion, provided that the product has not been damaged through misuse, abuse, accident, modifications, alteration neglect or mishandling. This warranty shall not apply to any product that is found to have been improperly installed, set-up, or used in any way not in accordance with the instructions supplied with the product. This warranty shall not apply to a failure of the product as a result of an accident, misuse, abuse, negligence, alteration, faulty installation, or any other failure not relating to faulty material or workmanship. This warranty shall not apply to the finish on any portion of the products such as surface and/or weathering, as this is considered normal wear and tear.

The manufacturer does not warrant and specifically disclaims any warranty, whether express or implied, of fitness for a particular purpose, other than the warranty contained herein. The manufacturer specifically disclaims any liability and shall not be liable for any consequential or incidental loss or damage, including but not limited to any labor/expense costs involved in the replacement or repair of said product.

Contact the Customer Service Team at 1-888-HD-HUSKY or visit www.huskytools.com.

Pre-assembly

TOOLS REQUIRED



Phillips
screwdriver



Safety
goggles


HARDWARE INCLUDED




NOTE: Hardware not shown to actual size.



AA



EE



GG



HH



II



JJ

Part	Part Code	Description	Quantity
AA	L034532A	Bolt M4 x 10L	8
EE	L031103M815	Bolt M8 x 15L	4
GG	L3011002	10MM/13MM Wrench	1
HH	L2015090	Plastic plug (M4)	4
II	L2015091	Plastic plug (M6)	14
JJ	L2015092	Plastic plug (M8)	16

SPECIFICATIONS


Maximum capacity (drawer)	120 lbs
Maximum capacity (bottom deep drawers)	240 lbs
Maximum capacity (total unit)	3,800 lbs



NOTE: Begin product assembly close to the final intended location of your mobile workbench. This product is heavy and may be difficult to move after assembly.

Pre-assembly (continued)

PACKAGE CONTENTS

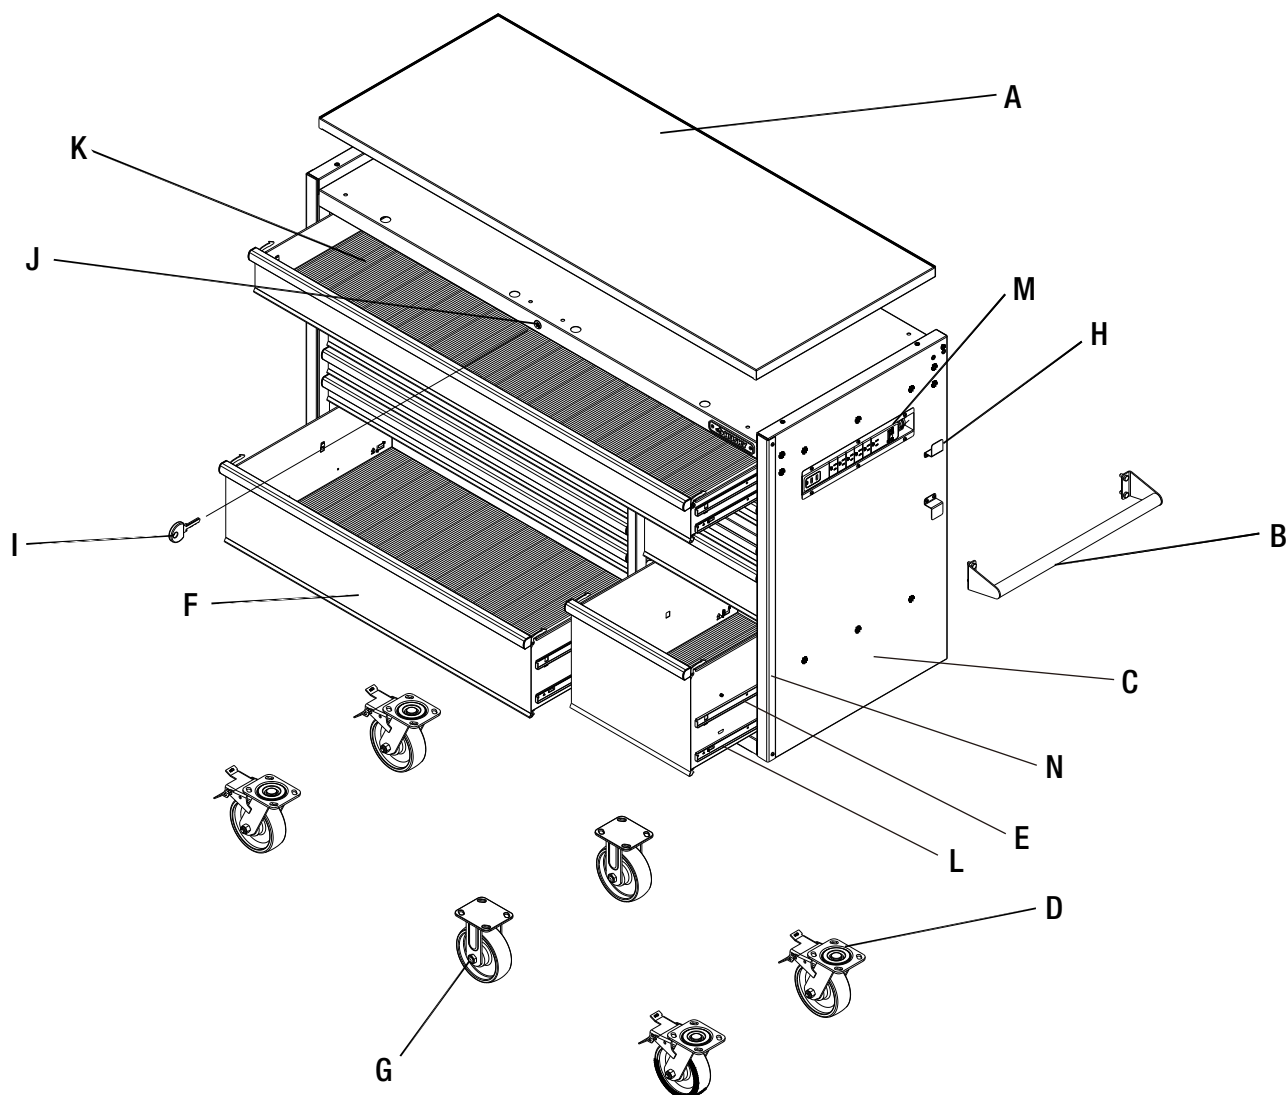

Part	Description	Quantity
A	Stainless steel top	1
B	Side handle	1
C	Rolling cabinet	1
D	Swivel caster with brake	4
E	Soft close drawer slide (pair)	4
F	Drawer	10
G	Fixed caster	2

Part	Description	Quantity
H	Power strip bracket	2
I	Key (set)	1
J	Lock	1
K	Drawer liner	10
L	Drawer slide (pair)	2
M	Power strip	2
N	Corner guard	2


Assembly

1 Attaching the side handle

- ☐ Attach the side handle (B) to the cabinet using four bolts (EE).
 - ☐ Tighten all bolts with the 10 mm wrench (GG).
- Do not over tighten the bolts to avoid damage to the finish.



NOTE: The holes in the cabinet are tapped and do not require nuts.

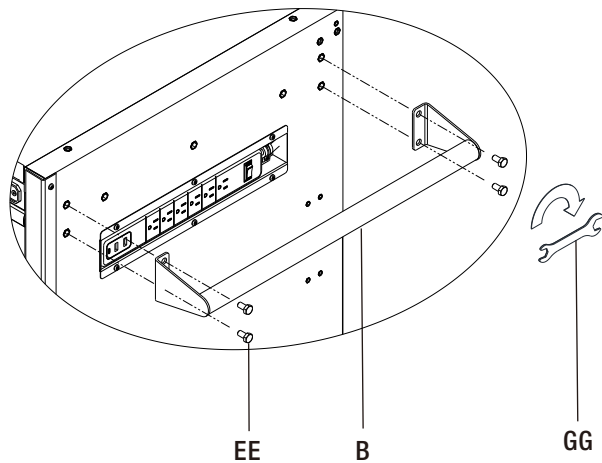


2 Attaching the power strip brackets

- ☐ Attach the power strip brackets (H) to the cabinet for both sides using two bolts (AA) each.
 - ☐ Tighten all bolts using a screwdriver.
- Do not over tighten the bolts to avoid damage to the finish.




NOTE: The holes in the cabinet are tapped and do not require nuts.

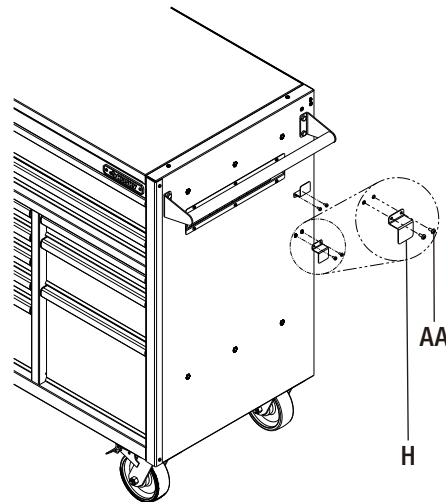

3 Installing the drawer liners

- ☐ Place the drawer liners (K) in appropriately-sized drawers to protect the surface.

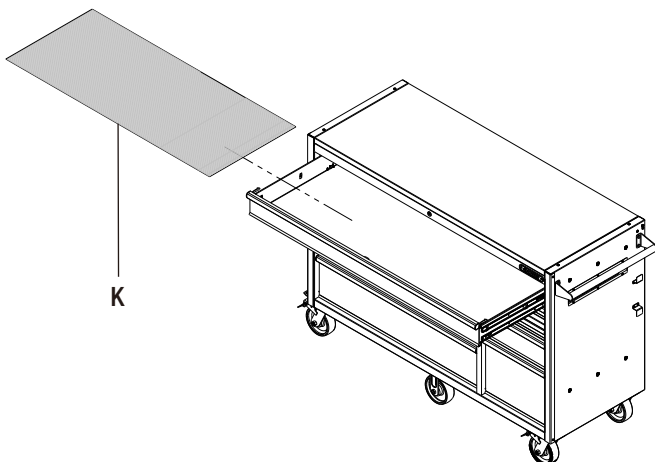


Operation

1 Locking and unlocking the unit




IMPORTANT : The drawers must be fully closed before locking / unlocking the unit.

- ☐ To lock the unit, insert the key (I) into the lock (J) and turn it one quarter turn counterclockwise. Then remove the key.
- ☐ To unlock the unit, insert the key (I) into the lock (J) and turn it one quarter turn clockwise. Then remove the key.

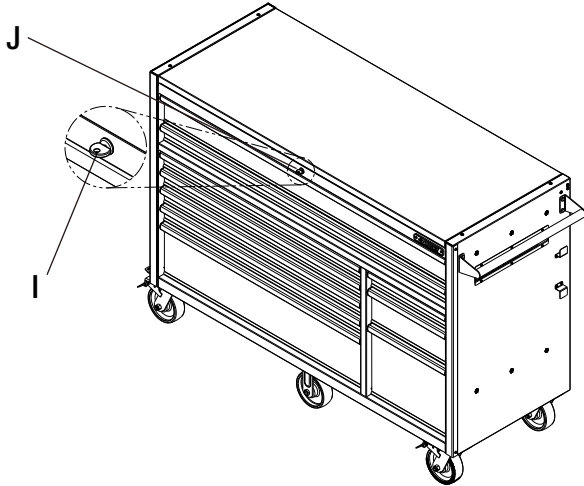


2 Removing the drawers

- ☐ Fully extend and empty the drawer.
- ☐ On the slide, lift up the plastic release lever on one slide and push down the plastic release lever on the other slide. Gently pull the drawer out so the slides can ride over the stops.

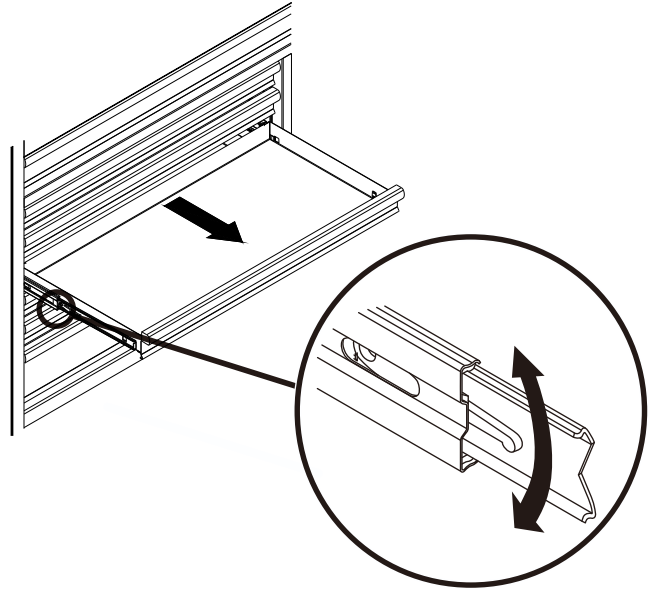


3 Installing the drawers

- ☐ Pull the slides and slide carrier out until fully extended.
- ☐ Hold the slide on the cabinet while aligning it with the slide on the drawer.
- ☐ Slightly insert one side and repeat for the other side.
- ☐ Slowly push the drawer until it is fully closed to engage the slide.
- ☐ Open the drawer and close it to verify proper operation.

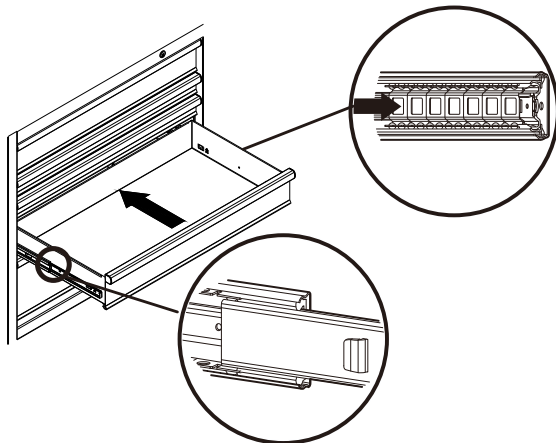

4 Removing the plug


- ☐ Please hold the power strip (M) when unplug.

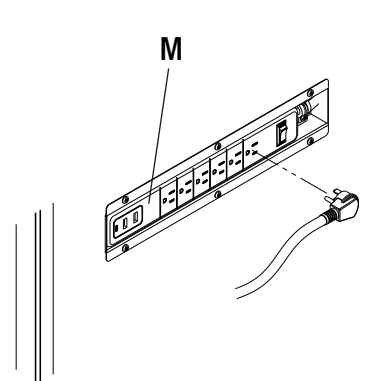

Maintenance


1 Maintaining the casters

- ☐ Grease the casters annually using high quality bearing grease.

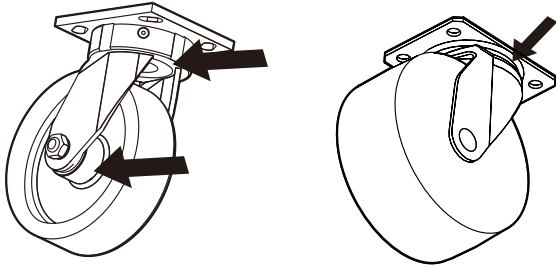


2 Maintaining the drawers

- ☐ Periodically clean the drawer trim and inside the drawers with a mild detergent and water.
- ☐ Remove grease and oil with a standard, nonflammable cleaning fluid.
- ☐ The use of drawer liners is recommended to protect the finish inside the drawers and make the drawers easier to clean. Drawer liners can be purchased at The Home Depot.
- ☐ Lubricate the slides semi-annually with grease or equivalent.

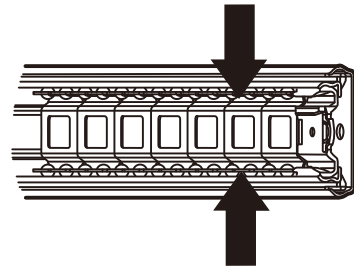

Care and Cleaning

- ☐ This steel product has been coated with industrial powder coating for a durable finish. To help protect this finish, do not allow harsh chemicals such as oil or grease to remain on the powder coating surface. Use a glass cleaner (Windex® or equivalent product) to clean and maintain all powder coated surfaces.

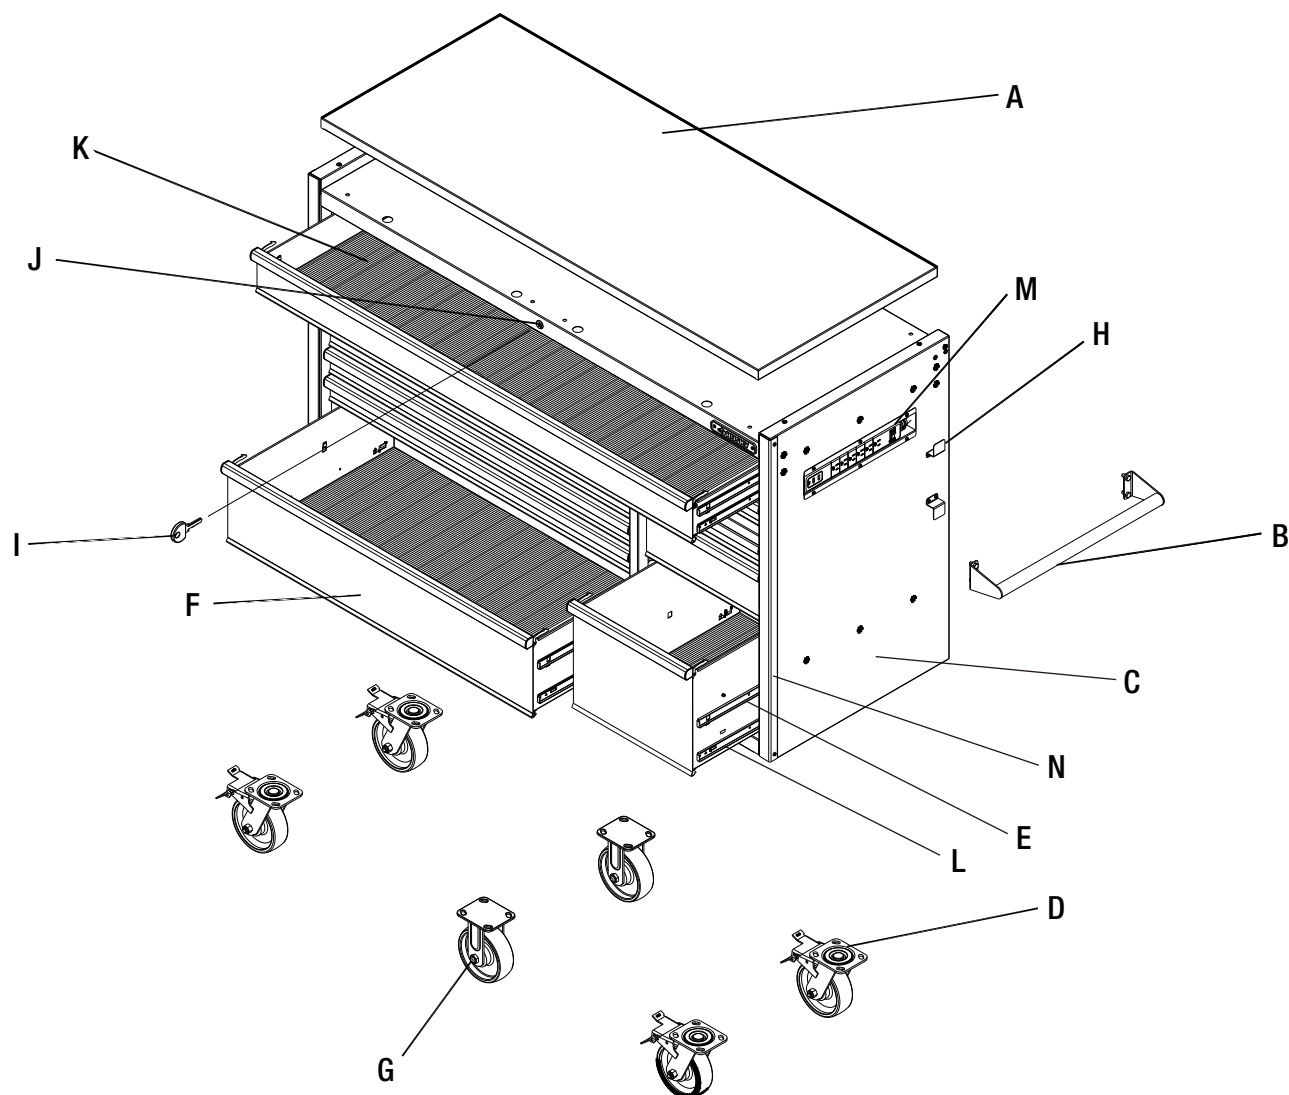

Part	Part Code	Description	Quantity
A	DTC61008	Stainless steel top	1
B	DTC04012	Side handle	1
D	K03220373	Swivel caster with brake	4
E	DTC35032	Soft close drawer slide (pair)	4
G	K03220371	Fixed caster	2
H	DTC500011	Power strip bracket	2
I	K06120123	Key (set)	1
J	K06120124	Lock	1
K	K0129151	Drawer liner	10
L	DTC35026	Drawer slide (pair)	2
M	K2415024C	Power strip	2



Questions, problems, missing parts? Before returning to the store,
call Husky Customer Service
8 a.m.-7 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m. EST Saturday

1-888-HD-HUSKY

HUSKYTOOLS.COM

Retain this manual for future use.



SKU#
THD.com#
Model# HOTC62XDBB1U


USE AND CARE GUIDE

HUSKY HD 62 IN. HUTCH

Questions, problems, missing parts?
Before returning to the store, call
Husky Customer Service
8 a.m. - 7 p.m., EST, Monday-Friday
9 a.m. - 6 p.m., EST, Saturday

1 888 HD-HUSKY

HUSKYTOOLS.COM

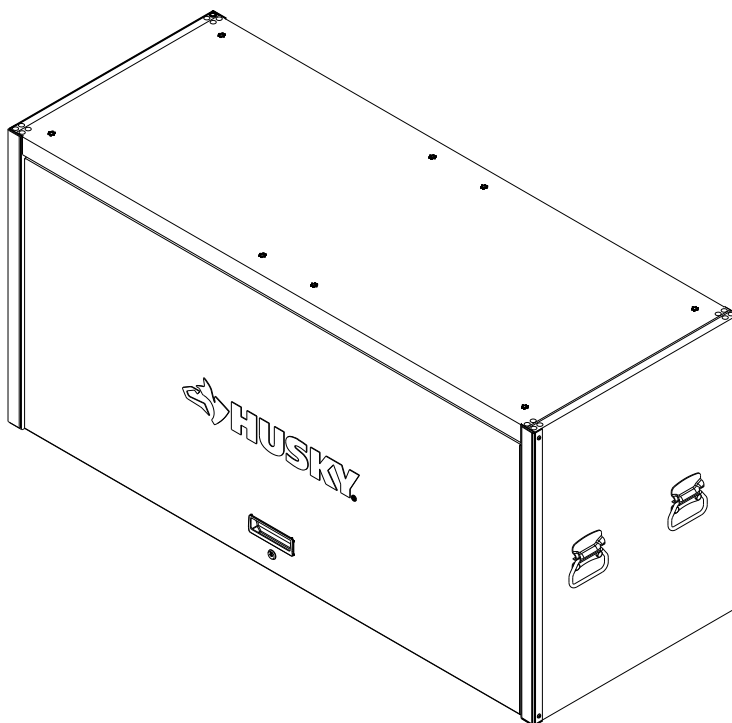

THANK YOU

We appreciate the trust and confidence you have placed in Husky through the purchase of this chest/cabinet. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Husky!

Table of Contents

Table of Contents.....	2
Safety Information.....	2-3
Warranty.....	3
Pre-Assembly.....	4
Tools Required.....	4
Hardware Included.....	4
Specifications.....	4
Package Contents.....	5

Operation.....	6
Care and Cleaning.....	7
Service Parts.....	8

Safety Information

1. Do not open more than one drawer at a time.
2. Do not let children approach the tool chest / cabinet, power strip and LED working light.
3. To help prevent the product from tipping, load the product starting with the bottom drawers.
4. Keep the locking casters brake set unless you are moving the cabinet. This will help to prevent the product from rolling.
5. Lock both the lid and all drawers before moving the cabinet / chest.
6. Do not step in any drawer / drawers.
7. When moving this product, push it rather than pull it.
8. Do not alter this product including power strip and LED working light in any manner.

Plug and Outlet Safety




WARNING: This product is for use on a nominal 120-volt circuit and has a grounding plug. Chest/cabinet plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earth (grounded) chest/cabinet power strips. Unmodified plugs and matching outlets will reduce risk of electric shock.



WARNING: Avoid body contact with earthed or grounded surfaces such as pipes, radiators, ranges and refrigerators. There is increased risk of electric shock if your body is earthed or grounded.



WARNING: Chests/cabinets marked "Grounding Required" have a power strip with a three wire cord and three prong grounding plug. The plug must be connected to a properly grounded outlet (See Figure). If the power strip should electrically malfunction or break down, grounding provides a low resistance path to carry electricity away from the user, reducing the risk of electric shock. The grounding prong in the plug is connected through the green wire inside the cord to the grounding system in the power strip. The green wire in the cord must be the only wire connected to the power strip's grounding system and must never be attached to an electrically "live" terminal. Your power strip must be plugged into an appropriate outlet, properly installed and grounded in accordance with all codes and ordinances.



DANGER: Do not stand on this product. You may fall or cause the product to tip.



DANGER: Do not move the product prior to closing and locking all the drawers. The drawers could come open and make the product unstable and tip.



DANGER: Do not mount this product on a truck bed or any other moving object.



WARNING: Keep the product on a level surface. The product may become unstable and tip if stored or moved on an uneven surface.



WARNING: Be careful when closing the cover. Remove hands before closing the cover.



WARNING: Do not unplug by pulling on cord. To unplug, grasp the plug, not the cord.



CAUTION: Do not lift this product directly with a forklift or tow with any mechanical devices.



CAUTION: Do not exceed the maximum product weight, including contents. Do not exceed the maximum weight for each drawer. See Specifications on page 4.



CAUTION: Only transport this product when empty. Properly secure when transporting.



WARNING: Unplug from outlet when not in use, and before putting on or taking off parts.



WARNING: Keep the cord away from heated surfaces.



WARNING: Do not use outdoors.

Safety Information (continued)



WARNING: The chest-cabinet is intended for household use.



WARNING: For loading always put heavier items at the bottom and not near the top in order to help prevent the possibility of the chest-cabinet tipping over.



DANGER: To reduce the risk of electric shock, always unplug this chest-cabinet from the electrical outlet before cleaning.



CAUTION: Do not use the side handle as a point of leverage to lift the unit off of the ground. Handle is not intended to withstand the force of vertical lifting, and is only designed to aid in the movement of unit around on casters. Failure to adhere to this warning may cause handle to break and cause personal injury and/or product damage.

LED Working Light Safety

- ☐ To reduce the risk of injury, close supervision is necessary when a product is used near children.
- ☐ Do not contact hot parts.
- ☐ Only use attachments recommended or sold by the manufacturer.
- ☐ To reduce the risk of electrical shock, do not put product in water or other liquid. Do not place or store product where it can fall or be pulled into a tub or sink.



WARNING: Only use Portable luminaire with Transformer(included) rated input 100-240Vac, 50/60Hz, 0.5A max and output 5Vdc, 2.4A.



CAUTION: This working light is designed for indoor use only. Do not use it in humid environments (like in a bathroom or outdoors). Otherwise the components inside may short-circuit and result in accidents.



WARNING: Do not allow the product to fall from high places.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.



NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The Responsible party information:

Clearwater Metal Vn JSC
Lot CN2, Mai Trung IZ, An Tay Village, Ben Cat Town, Binh Duong Province, Vietnam. Tel: +84.274.3581.773

Product name: Power strip 6 / 8 outlets with 2 USB ports
Model# K2415009 / K2415010 / K2415014 / K2415021

Warranty

The manufacturer warrants the product to be free from defects in materials and workmanship for a period of five (5) years from date of purchase. This warranty applies only to the original consumer and only to products used in normal use and service. If this product is found to be defective, the manufacturer's only obligation, and your exclusive remedy, is the repair or replacement of the product at the manufacturer's discretion, provided that the product has not been damaged through misuse, abuse, accident, modifications, alteration neglect or mishandling. This warranty shall not apply to any product that is found to have been improperly installed, set-up, or used in any way not in accordance with the instructions supplied with the product. This warranty shall not apply to a failure of the product as a result of an accident, misuse, abuse, negligence, alteration, faulty installation, or any other failure not relating to faulty material or workmanship. This warranty shall not apply to the finish on any portion of the products such as surface and/or weathering, as this is considered normal wear and tear.

The manufacturer does not warrant and specifically disclaims any warranty, whether express or implied, of fitness for a particular purpose, other than the warranty contained herein. The manufacturer specifically disclaims any liability and shall not be liable for any consequential or incidental loss or damage, including but not limited to any labor/expense costs involved in the replacement or repair of said product.

Contact the Customer Service Team at 1-888-HD-HUSKY or visit www.huskytools.com.

Pre-assembly

TOOLS REQUIRED



Phillips
screwdriver



Safety
goggles


HARDWARE INCLUDED



NOTE: Hardware not shown to actual size.




BB



CC



DD



GG



II



JJ

Part	Part Code	Description	Quantity
BB	L034534C	Bolt M6 x 12L	4
CC	L0345001	Bolt M6 x 15L	4
DD	L044514G	Washer M6	4
GG	L3011002	10MM/13MM Wrench	1
II	L2015091	Plastic plug (M6)	2
JJ	L2015092	Plastic plug (M8)	8

SPECIFICATIONS

Maximum capacity (total unit)


200 lbs



NOTE: Begin product assembly close to the final intended location of your chest/cabinet. This product is heavy and may be difficult to move after assembly.

Pre-assembly (continued)

PACKAGE CONTENTS

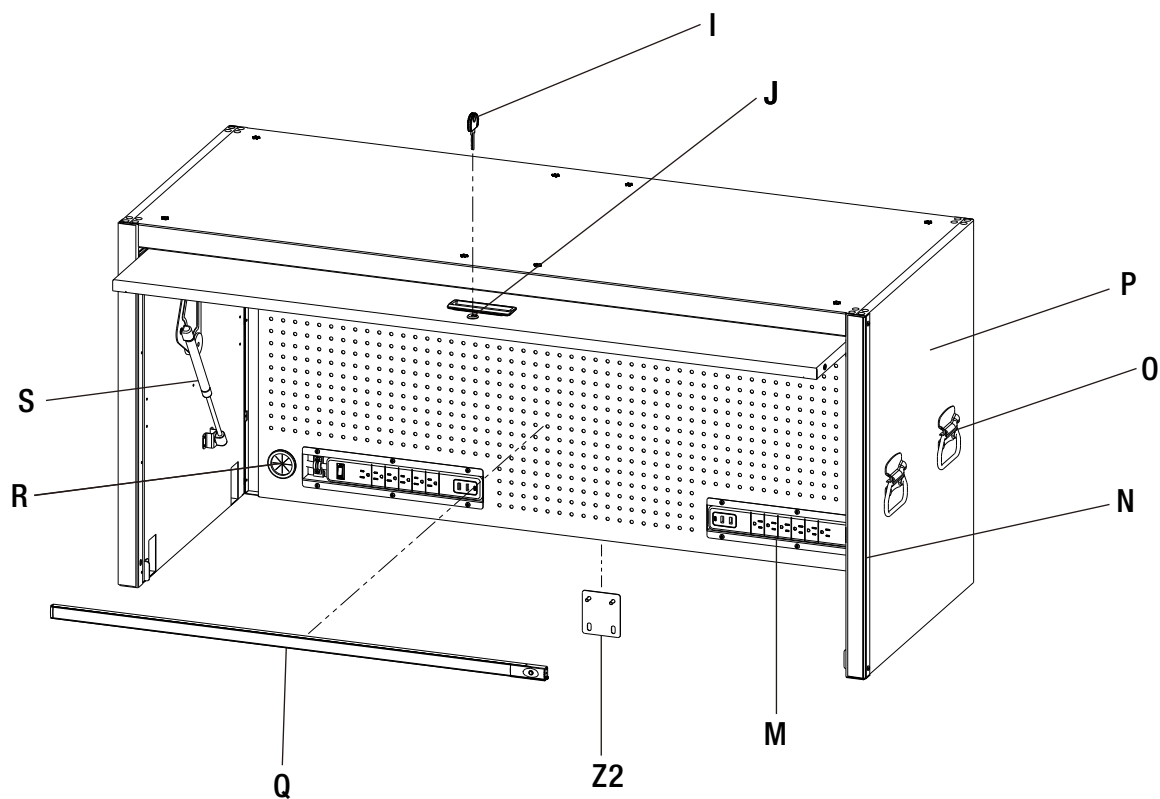

Part	Description	Quantity
I	Key (set)	1
J	Lock	1
M	Power strip	2
N	Corner guard	2
O	Handle	4
P	Hutch	1
Q	LED work light (long)	1
R	Grommet	2
S	Gas lift	2
Z2	Reinforcement panel	1


Operation

1 Locking and unlocking the unit



IMPORTANT : The drawers must be fully closed before locking / unlocking the unit.

- ☐ To lock the unit, insert the key (I) into the lock (J) and turn it one quarter turn counterclockwise. Then remove the key.
- ☐ To unlock the unit, insert the key (I) into the lock (J) and turn it one quarter turn clockwise. Then remove the key.

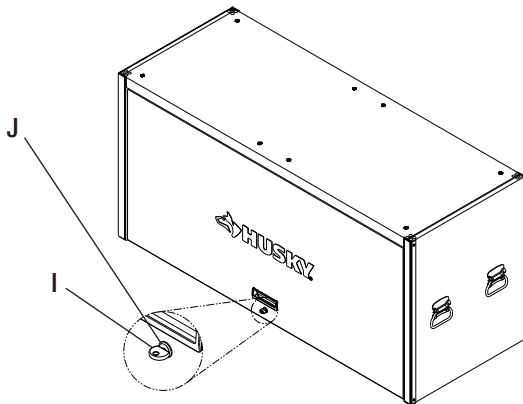


2 Opening the top chest lid

- ☐ Open the top chest lid to 90 degrees first.
- ☐ Push it into the top chest's inside-bottom.




IMPORTANT : The lid must be fully closed before moving the unit.

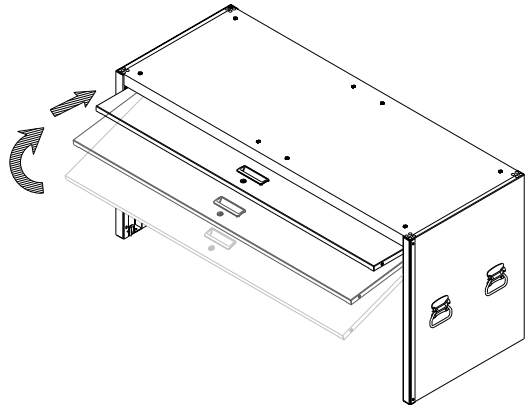


3 Installing the LED work light

- ☐ Connect the USB wire with the adapter.
- ☐ Plug in the magnetic LED work light (Q) on tool chest for extra light.
- ☐ Press the button on the LED light to turn the light on for use.

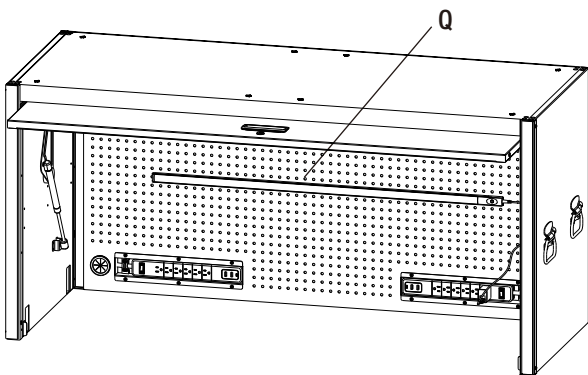


4 Removing the plug

- ☐ Please hold the power strip (M) when unplug.

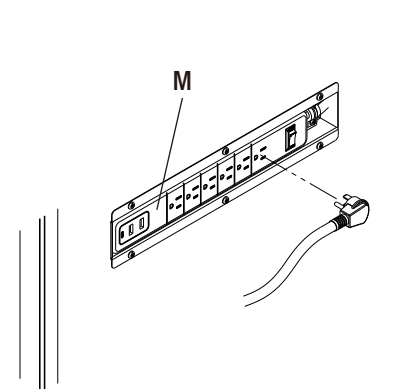

Care and Cleaning

- ☐ This steel product has been coated with industrial powder coating for a durable finish.
- ☐ To help protect the powder coated finish, do not allow harsh chemicals (oil, grease, or other chemical) to remain on the powder coating surface.
- ☐ Use a glass cleaner (Windex® or equivalent product) to clean and maintain all surfaces of powder coating.

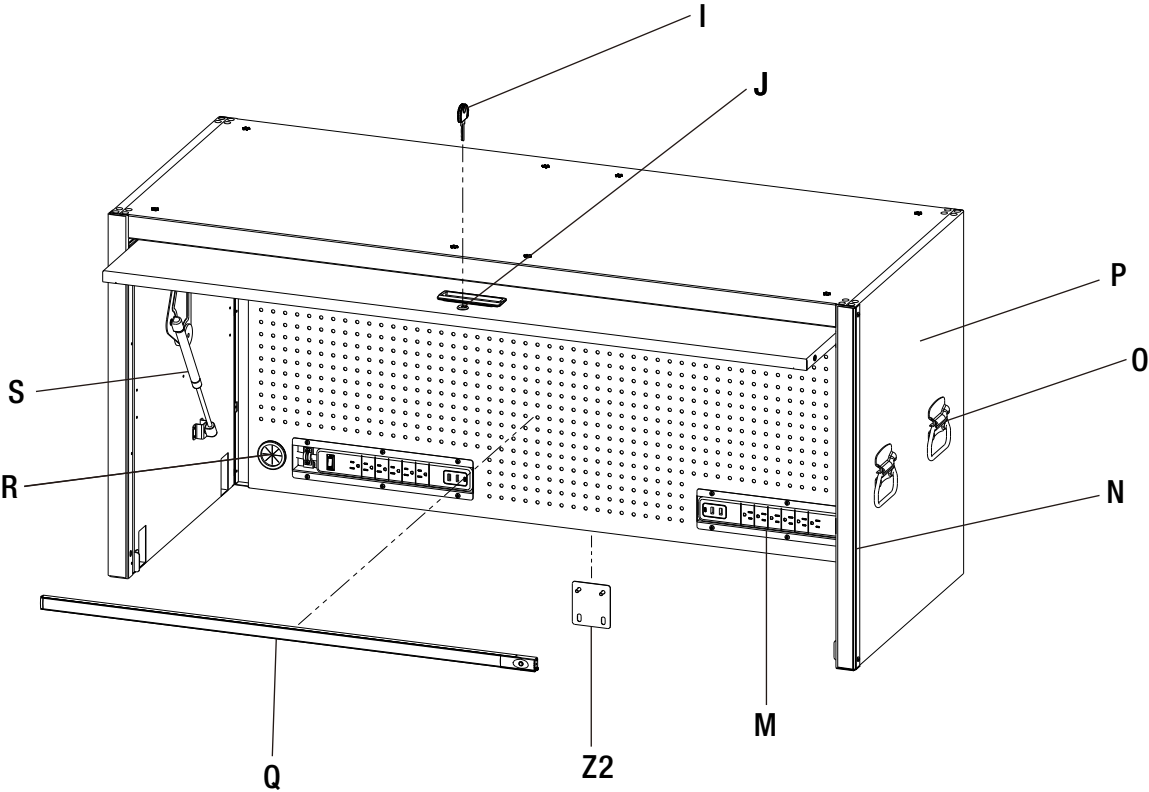

Part	Part Code	Description	Quantity
I	K06120123	Key (set)	1
J	K06120124	Lock	1
M	K2415024C	Power strip	2
O	DTC04005	Handle	4
Q	D60003	LED work light (long)	1
R	L2065001	Grommet	2
S	K0509047	Gas lift	2
Z2	D09007B	Reinforcement panel	1



Questions, problems, missing parts? Before returning to the store, call

Husky Customer Service

8 a.m. - 7 p.m., EST, Monday-Friday, 9 a.m. – 6 p.m., EST, Saturday

1-888-HD-HUSKY

HUSKYTOOLS.COM

Retain this manual for future use.



SKU/THD.com #
Model # HOTC24XDBB1F


USE AND CARE GUIDE

HUSKY HD 24 IN. TALL SIDE LOCKER

Questions, problems, missing parts?
Before returning to the store, call
Husky Customer Service
8 a.m. - 7 p.m., EST, Monday-Friday
9 a.m. - 6 p.m., EST, Saturday

1 888 HD-HUSKY

HUSKYTOOLS.COM

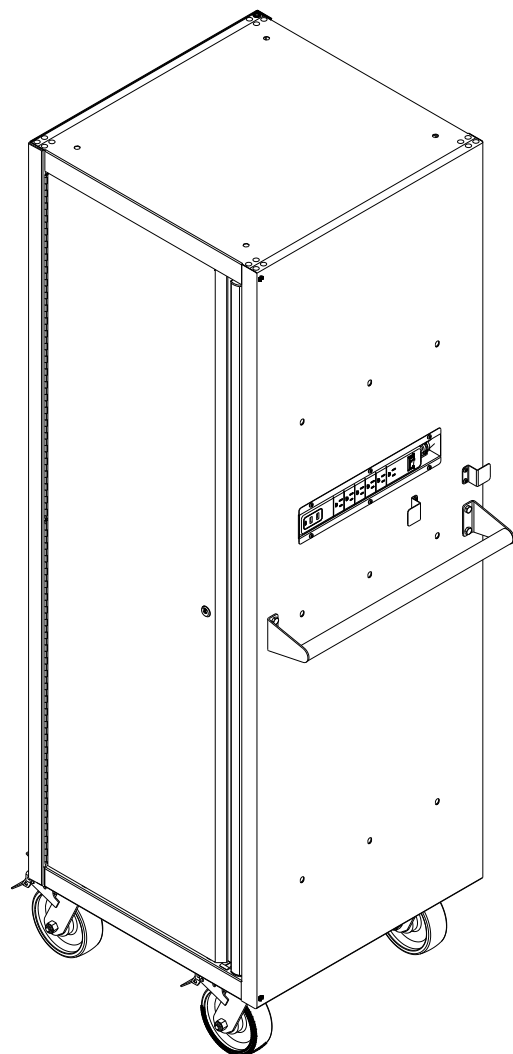

THANK YOU

We appreciate the trust and confidence you have placed in Husky through the purchase of this mobile workbench. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Husky!

Table of Contents

Table of Contents	2
Safety Information	2-3
Warranty	3
Pre-Assembly	4
Tools Required	4
Hardware Included	4
Specifications	4
Package Contents	5

Assembly	6-7
Operation	8
Maintenance	8
Care and Cleaning	8
Service Parts	9

Safety Information

1. Do not open more than one drawer at a time.
2. Do not let children approach the product.
3. To help prevent the product from tipping, load the product starting with the bottom drawers.
4. Keep locking the casters' brake set unless you are moving the cabinet. This will help to prevent the product from rolling.
5. Lock all drawers before moving the product.
6. Make sure all drawers close tightly before locking/unlocking.
7. Do not step in any drawer/drawers.
8. When moving this product, push it rather than pull it.
9. Do not alter this product in any manner.

Plug and Outlet Safety




WARNING: Chest/cabinet plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earth (grounded) chest/cabinet power strips. Unmodified plugs and matching outlets will reduce risk of electric shock.



WARNING: Avoid body contact with earthed or grounded surfaces such as pipes, radiators, ranges and refrigerators. There is increased risk of electric shock if your body is earthed or grounded.



WARNING: Chests/cabinets marked "Grounding Required" have a power strip with a three wire cord and three prong grounding plug. The plug must be connected to a properly grounded outlet (See Figure). If the power strip should electrically malfunction or break down, grounding provides a low resistance path to carry electricity away from the user, reducing the risk of electric shock. The grounding prong in the plug is connected through the green wire inside the cord to the grounding system in the power strip. The green wire in the cord must be the only wire connected to the power strip's grounding system and must never be attached to an electrically "live" terminal. Your power strip must be plugged into an appropriate outlet, properly installed and grounded in accordance with all codes and ordinances.



DANGER: Do not stand on this product. You may fall or cause the product to tip.



DANGER: Do not move the product prior to closing and locking all the drawers. The drawers could come open and make the product unstable and tip.



DANGER: Do not mount this product on a truck bed or any other moving object.



WARNING: Keep the product on a level surface. The product may become unstable and tip if stored or moved on an uneven surface.



CAUTION: Do not lift this product directly with a forklift or tow with any mechanical devices.



CAUTION: Do not exceed the maximum product weight, including contents. Do not exceed the maximum weight for each drawer. See Specifications on page 4.



CAUTION: Only transport this product when empty. Properly secure when transporting.

Safety Information (continued)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.



NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



CAUTION: Do not use the side handle as a point of leverage to lift the unit off of the ground. Handle is not intended to withstand the force of vertical lifting, and is only designed to aid in the movement of unit around on casters. Failure to adhere to this warning may cause handle to break and cause personal injury and/or product damage.

The Responsible party information:

Clearwater Metal Vn JSC

Lot CN2, Mai Trung IZ, An Tay Village, Ben Cat Town, Binh Duong Province, Vietnam. Tel: +84.274.3581.773

Product name: Power strip 6 outlets with 2 USB ports
Model# K2415009 / K2415014 / K2415021

Warranty

The manufacturer warrants the product to be free from defects in materials and workmanship for a period of five (5) years from date of purchase. This warranty applies only to the original consumer and only to products used in normal use and service. If this product is found to be defective, the manufacturer's only obligation, and your exclusive remedy, is the repair or replacement of the product at the manufacturer's discretion, provided that the product has not been damaged through misuse, abuse, accident, modifications, alteration neglect or mishandling. This warranty shall not apply to any product that is found to have been improperly installed, set-up, or used in any way not in accordance with the instructions supplied with the product. This warranty shall not apply to a failure of the product as a result of an accident, misuse, abuse, negligence, alteration, faulty installation, or any other failure not relating to faulty material or workmanship. This warranty shall not apply to the finish on any portion of the products such as surface and/or weathering, as this is considered normal wear and tear.

The manufacturer does not warrant and specifically disclaims any warranty, whether express or implied, of fitness for a particular purpose, other than the warranty contained herein. The manufacturer specifically disclaims any liability and shall not be liable for any consequential or incidental loss or damage, including but not limited to any labor/expense costs involved in the replacement or repair of said product.

Contact the Customer Service Team at 1-888-HD-HUSKY or visit www.huskytools.com.

Pre-assembly

TOOLS REQUIRED



Phillips
screwdriver



Safety
goggles

HARDWARE INCLUDED




NOTE: Hardware not shown to actual size.




AA




BB



EE



FF



GG



HH



JJ

Part	Part Code	Description	Quantity
AA	L034532A	Bolt M4 x 10L	4
BB	L034534C	Bolt M6 x 12L	4
EE	L031103M815	Bolt M8 x 15L	4
FF	L0311010615	Bolt M8 x 15L	29
GG	L0311002	10MM/13MM Wrench	1
HH	L2015090	Plastic plug M4	12
JJ	L2015092	Plastic plug M8	26

SPECIFICATIONS


Maximum capacity (shelf)	100 lbs
Maximum capacity (total unit)	700 lbs



NOTE: Begin product assembly close to the final intended location of your mobile workbench. This product is heavy and may be difficult to move after assembly.

Pre-assembly (continued)

PACKAGE CONTENTS

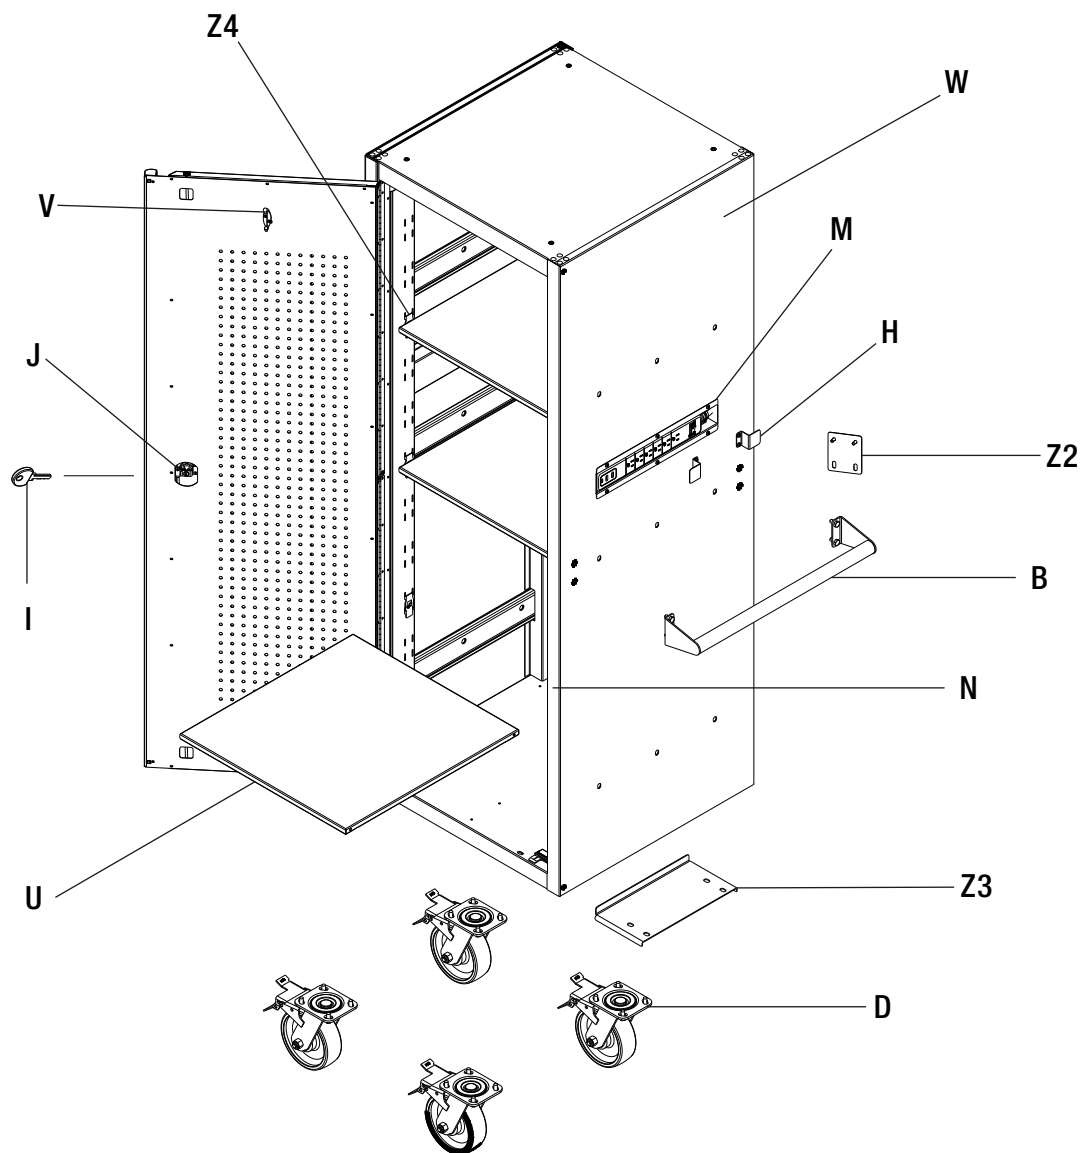

Part	Description	Quantity
B	Side handle	1
D	Swivel caster with brake	4
H	Power strip bracket	2
I	Key (set)	1
J	Lock	1
M	Power strip	1

Part	Description	Quantity
N	Corner guard	2
U	Shelf	3
V	Coat hook	1
W	Side locker	1
Z2	Reinforcement Panel	1
Z3	Support Base Plate	1
Z4	Shelf clips	12


Assembly

1 Attaching the side handle

- ☐ Attach the side handle (B) to the cabinet using four bolts (EE).
 - ☐ Tighten all bolts with the 10 mm wrench (GG).
- Do not over tighten the bolts to avoid damage to the finish.



NOTE: The holes in the cabinet are tapped and do not require nuts.

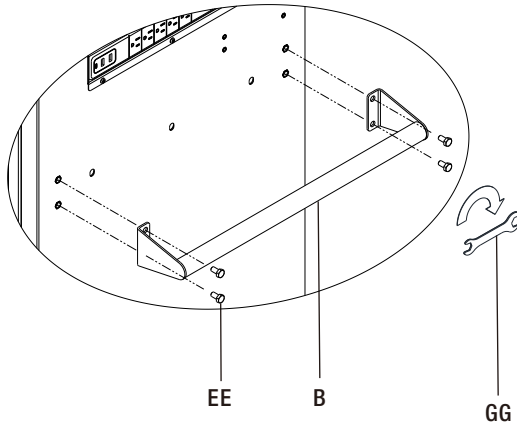


2 Attaching the power strip brackets

- ☐ Attach the power strip brackets (H) to the cabinet for both sides using two bolts (AA) each.
 - ☐ Tighten all bolts using a screwdriver.
- Do not over tighten the bolts to avoid damage to the finish.



NOTE: The holes in the cabinet are tapped and do not require nuts.

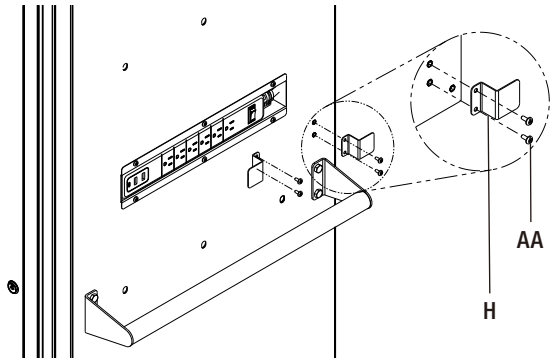


3 Installing the casters




CAUTION: Do not over tighten the screws.

- ☐ Lay the side locker (W) on its back. Use the packaging material to protect the finish.
- ☐ Mount the four swivel casters with brake (D) to the side locker (W) by using four bolts (FF) per caster. The swivel casters with brake (D) should be installed on the end of side locker (W).

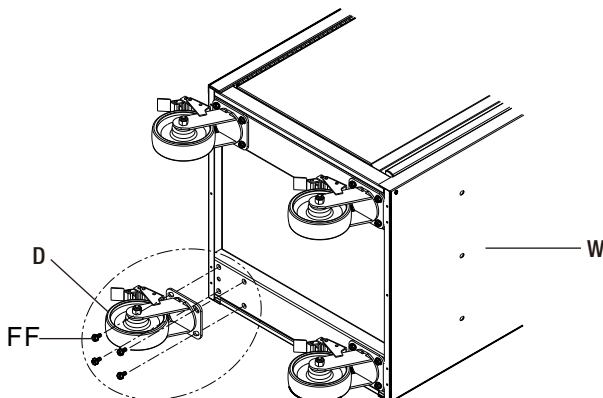

4 Installing the Shelf

- ☐ Place the shelves (U) over the shelf clips (Z4), and push them down onto the shelf brackets.
- ☐ Make sure the shelves (U) are properly and safely locked by the upright hooks on the shelf brackets.

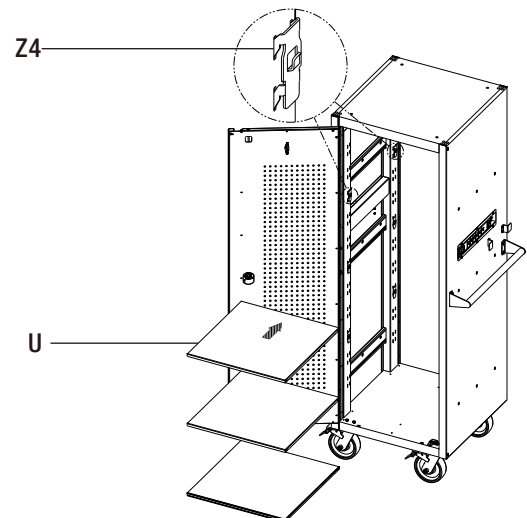


5 The door can be reversed to left and right

- ☐ Remove the door of the side locker (W) by removing the bolts inside the hinge of the side locker.
 - ☐ Remove the magnets on the top and bottom of the side locker (W) by removing the bolts.
 - ☐ Re-install the magnets on the other side of the side locker with the bolts.
 - ☐ Flip the door and reorient to the other side.
 - ☐ Re-install the door with the bolts along the hinge located on the side of the side locker.
 - ☐ Tighten all bolts using a screwdriver.
- Do not over tighten the bolts to avoid damage to the finish.



NOTE : Ensure the door is level and centered in the opening before tightening the bolts.

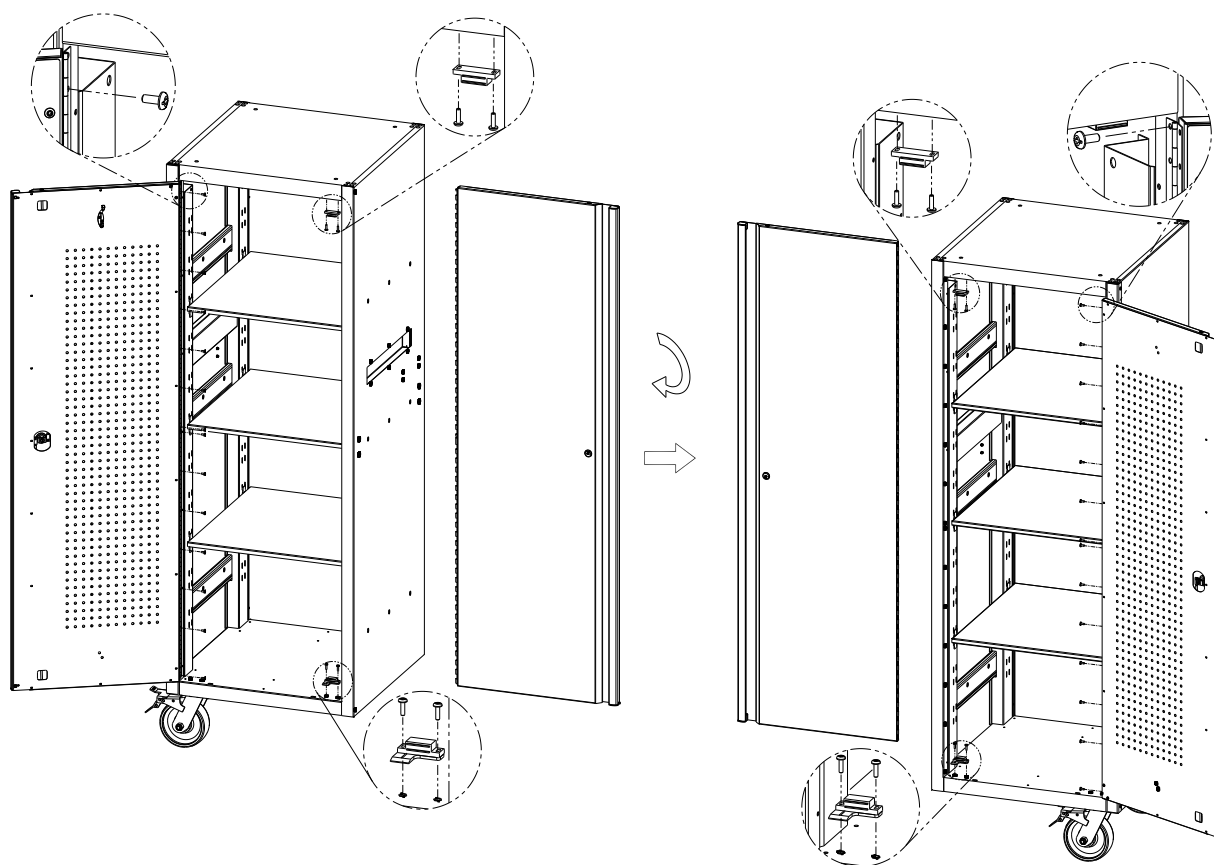


Operation

Locking and unlocking the unit



IMPORTANT : The drawers must be fully closed before locking / unlocking the unit.


- ☐ To lock the unit, insert the key (I) into the lock (J) and turn it one quarter turn counterclockwise. Then remove the key.
- ☐ To unlock the unit, insert the key (I) into the lock (J) and turn it one quarter turn clockwise. Then remove the key.

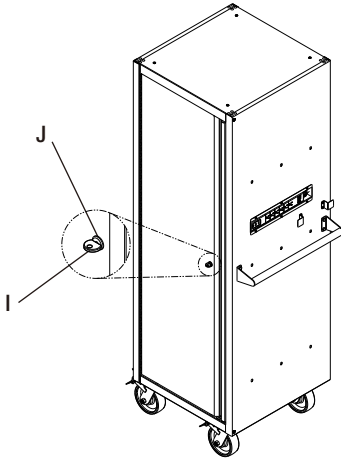

Maintenance


Maintaining the casters

- ☐ Grease the casters annually using high quality bearing grease.

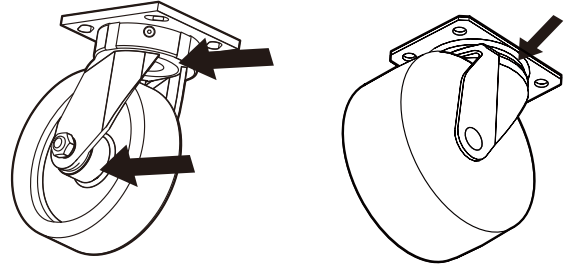

Care and Cleaning

- ☐ This steel product has been coated with industrial powder coating for a durable finish. To help protect this finish, do not allow harsh chemicals such as oil or grease to remain on the powder coating surface. Use a glass cleaner (Windex® or equivalent product) to clean and maintain all powder coated surfaces.

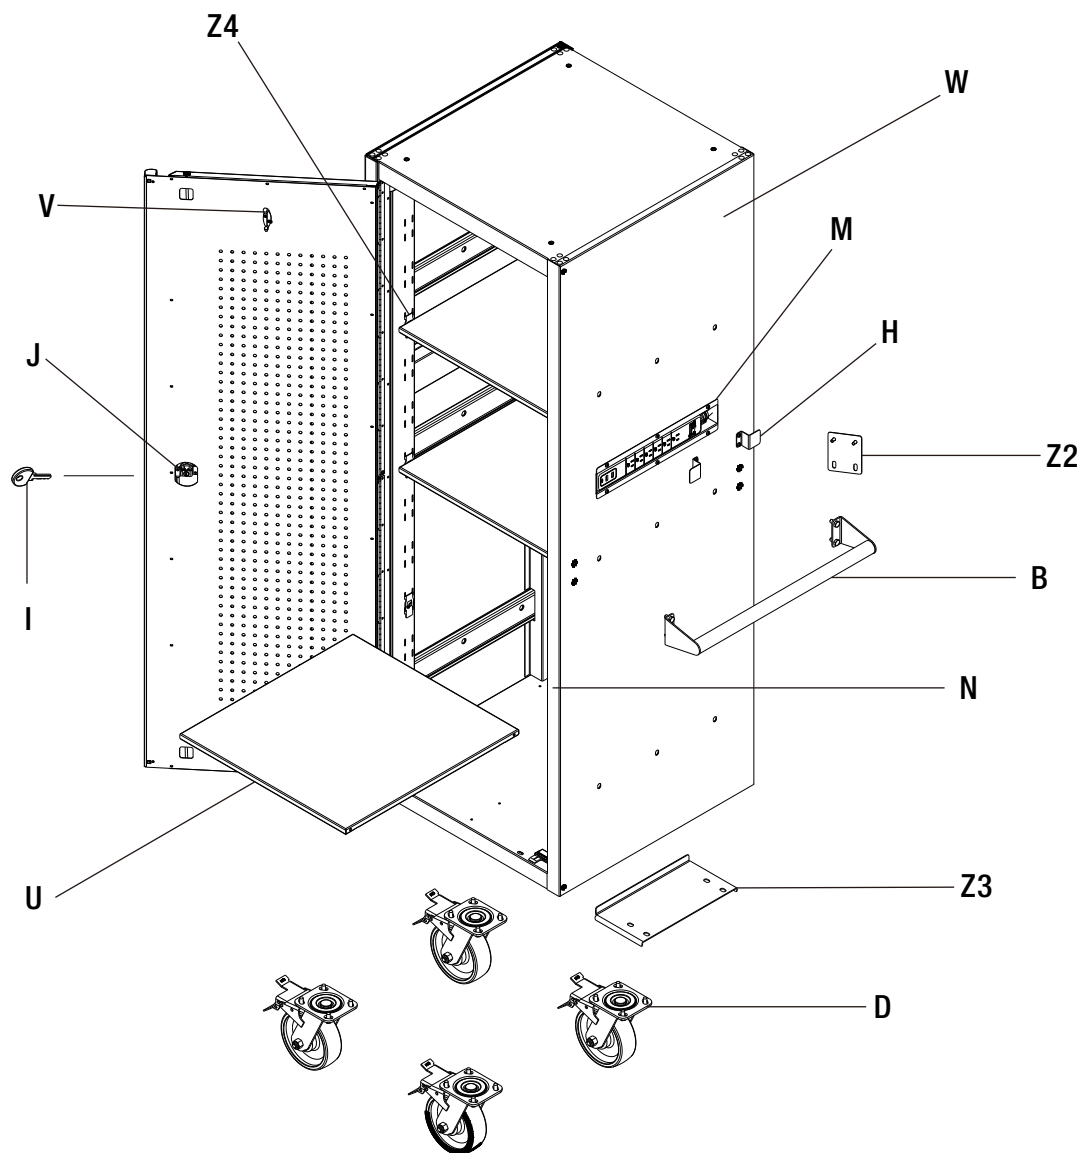

Part	Part Code	Description	Quantity
B	DTC04012	Side handle	1
D	K03220372	Swivel caster with brake	4
H	DTC500011	Power strip bracket	2
I	K06120123	Key (set)	1
J	K06120124	Lock	1
M	K2415024C	Power strip	1
U	B4B100TC24E6158A	Shelf	3
Z2	D09007B	Reinforcement Panel	1
Z3	D09016B	Support Base Plate	1
Z4	B30150MD36E2485A	Shelf clips	12



Questions, problems, missing parts? Before returning to the store,
call Husky Customer Service
8 a.m.-7 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m. EST Saturday

1-888-HD-HUSKY

HUSKYTOOLS.COM

Retain this manual for future use.



THD.com#
Model# HOTC55XDBB1H


USE AND CARE GUIDE

HUSKY HD 55 IN. OVERHEAD LOCKER

Questions, problems, missing parts?
Before returning to the store, call
Husky Customer Service
8 a.m. - 7 p.m., EST, Monday-Friday
9 a.m. - 6 p.m., EST, Saturday

1 888 HD-HUSKY

HUSKYTOOLS.COM

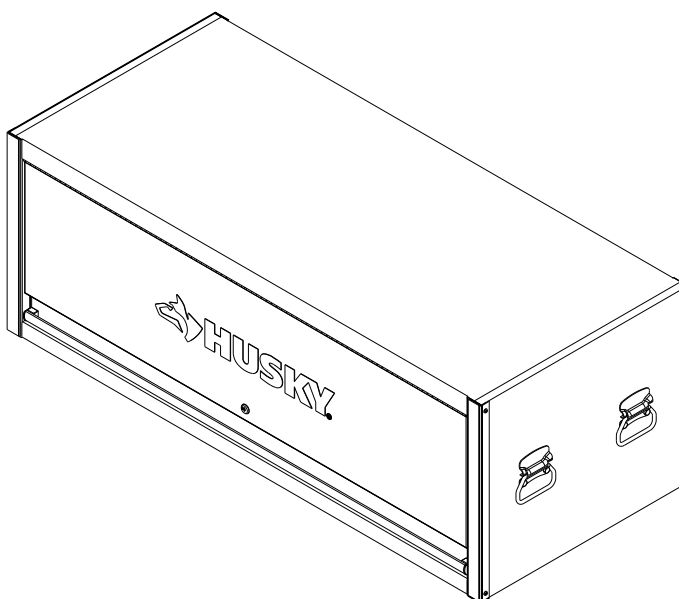

THANK YOU

We appreciate the trust and confidence you have placed in Husky through the purchase of this chest/cabinet. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Husky!

Table of Contents

Table of Contents.....	2
Safety Information.....	2-3
Warranty.....	3
Pre-Assembly.....	4
Tools Required.....	4
Hardware Included.....	4
Specifications.....	4
Package Contents.....	5

Assembly.....	6
Operation.....	6
Care and Cleaning.....	6
Service Parts.....	7

Safety Information

1. Do not open more than one drawer at a time.
2. Do not let children approach the tool chest / cabinet, power strip and LED working light.
3. To help prevent the product from tipping, load the product starting with the bottom drawers.
4. Keep the locking casters brake set unless you are moving the cabinet. This will help to prevent the product from rolling.
5. Lock both the lid and all drawers before moving the cabinet / chest.
6. Do not step in any drawer / drawers.
7. When moving this product, push it rather than pull it.
8. Do not alter this product including power strip and LED working light in any manner.

Plug and Outlet Safety





WARNING: This product is for use on a nominal 120-volt circuit and has a grounding plug. Chest/cabinet plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earth (grounded) chest/cabinet power strips. Unmodified plugs and matching outlets will reduce risk of electric shock.



WARNING: Avoid body contact with earthed or grounded surfaces such as pipes, radiators, ranges and refrigerators. There is increased risk of electric shock if your body is earthed or grounded.



WARNING: Chests/cabinets marked "Grounding Required" have a power strip with a three wire cord and three prong grounding plug. The plug must be connected to a properly grounded outlet (See Figure). If the power strip should electrically malfunction or break down, grounding provides a low resistance path to carry electricity away from the user, reducing the risk of electric shock. The grounding prong in the plug is connected through the green wire inside the cord to the grounding system in the power strip. The green wire in the cord must be the only wire connected to the power strip's grounding system and must never be attached to an electrically "live" terminal. Your power strip must be plugged into an appropriate outlet, properly installed and grounded in accordance with all codes and ordinances.



DANGER: Do not stand on this product. You may fall or cause the product to tip.



DANGER: Do not move the product prior to closing and locking all the drawers. The drawers could come open and make the product unstable and tip.



DANGER: Do not mount this product on a truck bed or any other moving object.



WARNING: Keep the product on a level surface. The product may become unstable and tip if stored or moved on an uneven surface.



WARNING: Be careful when closing the cover. Remove hands before closing the cover.



WARNING: Do not unplug by pulling on cord. To unplug, grasp the plug, not the cord.



CAUTION: Do not lift this product directly with a forklift or tow with any mechanical devices.



CAUTION: Do not exceed the maximum product weight, including contents. Do not exceed the maximum weight for each drawer. See Specifications on page 4.



CAUTION: Only transport this product when empty. Properly secure when transporting.



WARNING: Unplug from outlet when not in use, and before putting on or taking off parts.



WARNING: Keep the cord away from heated surfaces.



WARNING: Do not use outdoors.

Safety Information (continued)



WARNING: The chest-cabinet is intended for household use.



WARNING: For loading always put heavier items at the bottom and not near the top in order to help prevent the possibility of the chest-cabinet tipping over.



DANGER: To reduce the risk of electric shock, always unplug this chest-cabinet from the electrical outlet before cleaning.



CAUTION: Do not use the side handle as a point of leverage to lift the unit off of the ground. Handle is not intended to withstand the force of vertical lifting, and is only designed to aid in the movement of unit around on casters. Failure to adhere to this warning may cause handle to break and cause personal injury and/or product damage.

LED Working Light Safety

- ☐ To reduce the risk of injury, close supervision is necessary when a product is used near children.
- ☐ Do not contact hot parts.
- ☐ Only use attachments recommended or sold by the manufacturer.
- ☐ To reduce the risk of electrical shock, do not put product in water or other liquid. Do not place or store product where it can fall or be pulled into a tub or sink.



WARNING: Only use Portable luminaire with Transformer(included) rated input 100-240Vac, 50/60Hz, 0.5A max and output 5Vdc, 2.4A.



CAUTION: This working light is designed for indoor use only. Do not use it in humid environments (like in a bathroom or outdoors). Otherwise the components inside may short-circuit and result in accidents.



WARNING: Do not allow the product to fall from high places.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.



NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The Responsible party information:

Clearwater Metal Vn JSC
Lot CN2, Mai Trung IZ, An Tay Village, Ben Cat Town, Binh Duong Province, Vietnam. Tel: +84.274.3581.773

Product name: Power strip 6 / 8 outlets with 2 USB ports
Model# K2415009 / K2415010 / K2415014 / K2415021

Warranty

The manufacturer warrants the product to be free from defects in materials and workmanship for a period of five (5) years from date of purchase. This warranty applies only to the original consumer and only to products used in normal use and service. If this product is found to be defective, the manufacturer's only obligation, and your exclusive remedy, is the repair or replacement of the product at the manufacturer's discretion, provided that the product has not been damaged through misuse, abuse, accident, modifications, alteration neglect or mishandling. This warranty shall not apply to any product that is found to have been improperly installed, set-up, or used in any way not in accordance with the instructions supplied with the product. This warranty shall not apply to a failure of the product as a result of an accident, misuse, abuse, negligence, alteration, faulty installation, or any other failure not relating to faulty material or workmanship. This warranty shall not apply to the finish on any portion of the products such as surface and/or weathering, as this is considered normal wear and tear.

The manufacturer does not warrant and specifically disclaims any warranty, whether express or implied, of fitness for a particular purpose, other than the warranty contained herein. The manufacturer specifically disclaims any liability and shall not be liable for any consequential or incidental loss or damage, including but not limited to any labor/expense costs involved in the replacement or repair of said product.

Contact the Customer Service Team at 1-888-HD-HUSKY or visit www.huskytools.com.

Pre-assembly

TOOLS REQUIRED



Phillips
screwdriver




Safety
goggles

HARDWARE INCLUDED



NOTE: Hardware not shown to actual size.



KK



LL

Part	Part Code	Description	Quantity
KK	L034554M860	Bolt M8 x 60L	4
LL	L044515J	Washer M8	4

SPECIFICATIONS


Maximum capacity (total unit)	900 lbs
-------------------------------	---------



NOTE: Begin product assembly close to the final intended location of your chest/cabinet. This product is heavy and may be difficult to move after assembly.

Pre-assembly (continued)

PACKAGE CONTENTS

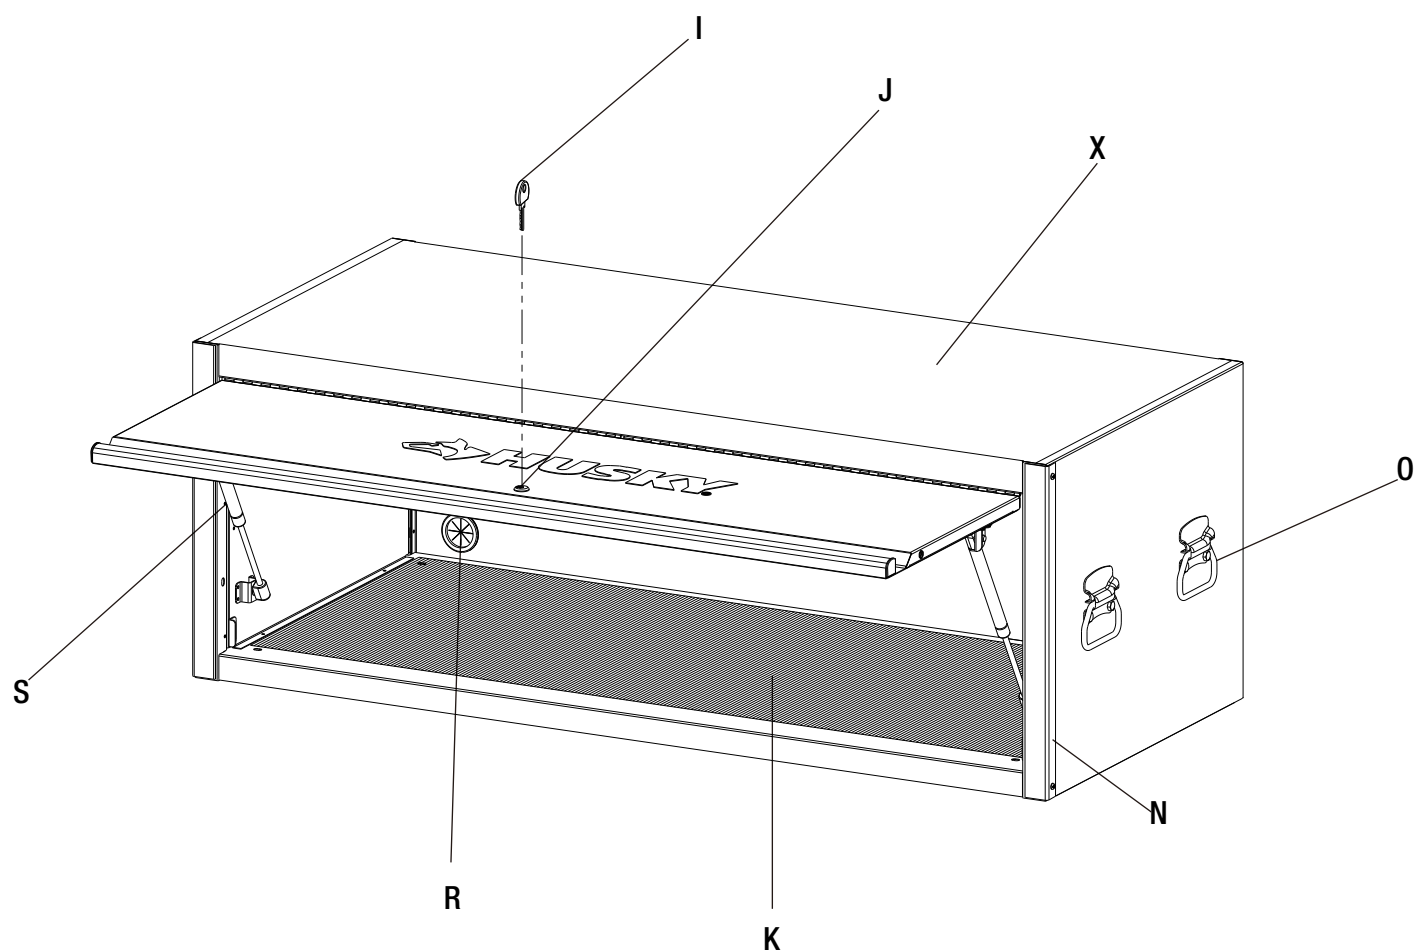


Part	Description	Quantity
I	Key (set)	1
J	Lock	1
K	Drawer liner	1
N	Corner guard	2
O	Handle	4
R	Grommet	2
S	Gas lift	2
X	Overhead locker	1

Assembly

Installing the drawer liner

- ☐ Place the drawer liners (K) in appropriately sized drawers and the chest lid area to protect the surface.

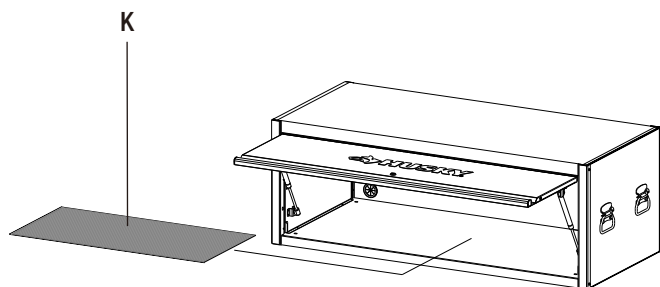


Operation

Locking and unlocking the unit




IMPORTANT : The drawers must be fully closed before locking / unlocking the unit.

- ☐ To lock the unit, insert the key (I) into the lock (J) and turn it one quarter turn counterclockwise. Then remove the key.
- ☐ To unlock the unit, insert the key (I) into the lock (J) and turn it one quarter turn clockwise. Then remove the key.

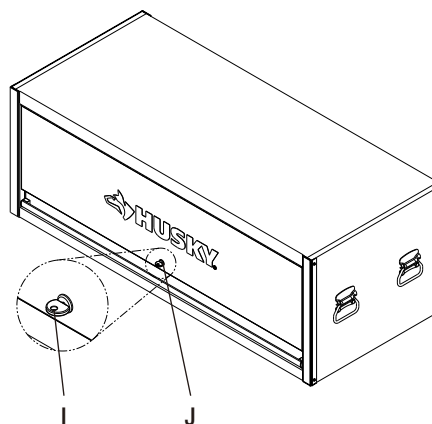

Care and Cleaning

- ☐ This steel product has been coated with industrial powder coating for a durable finish.
- ☐ To help protect the powder coated finish, do not allow harsh chemicals (oil, grease, or other chemical) to remain on the powder coating surface.
- ☐ Use a glass cleaner (Windex® or equivalent product) to clean and maintain all surfaces of powder coating.

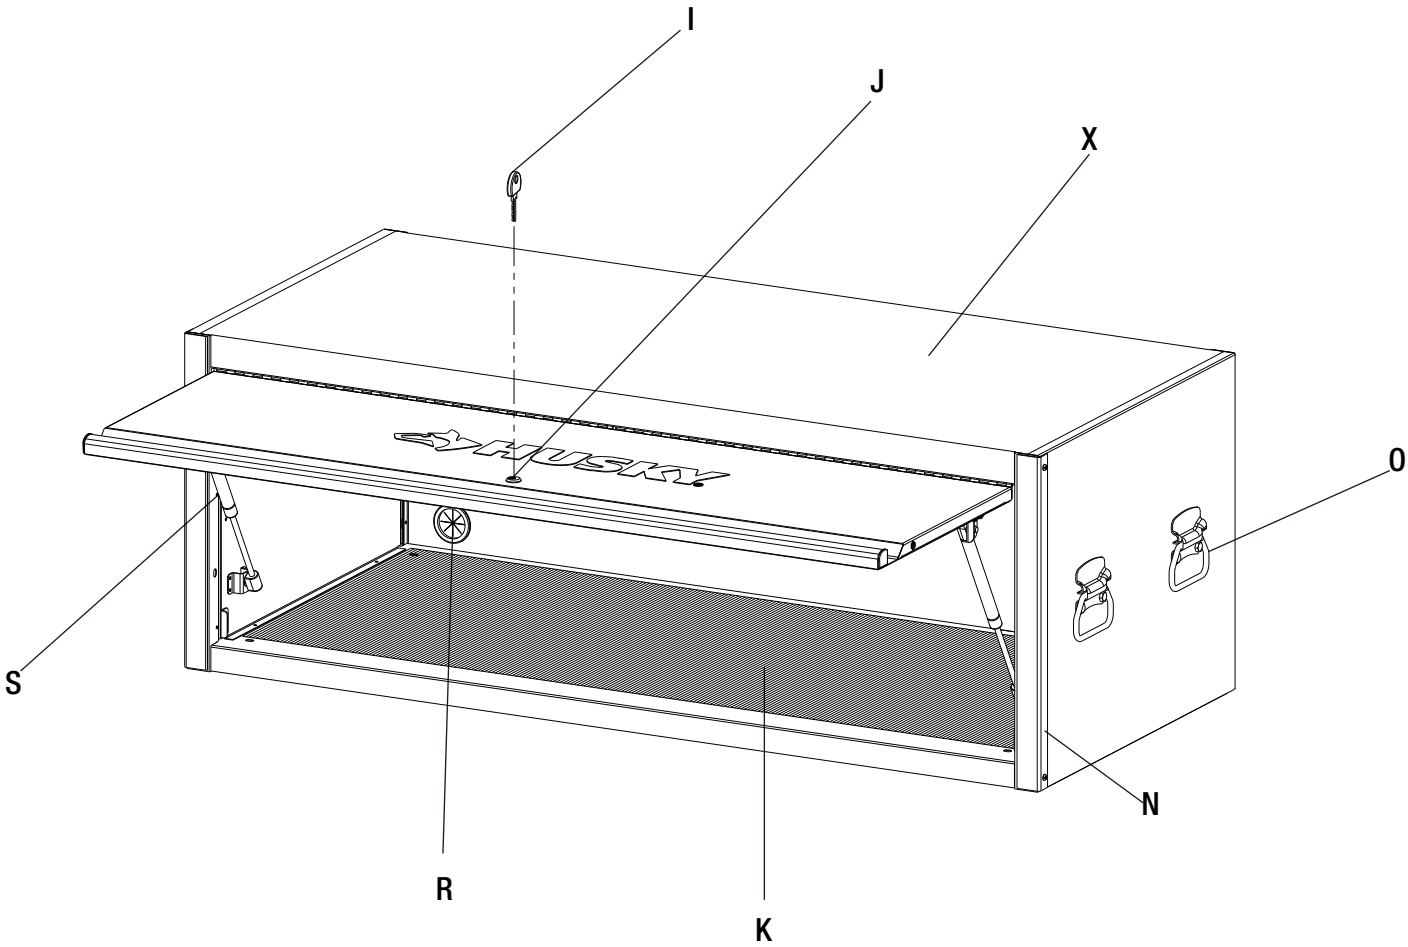

Part	Part Code	Description	Quantity
I	K06120123	Key (set)	1
J	K06120124	Lock	1
K	K0129153	Drawer liner	1
O	DTC04005	Handle	4
R	L2065001	Grommet	2
S	K0509012	Gas lift	2



Questions, problems, missing parts? Before returning to the store, call

Husky Customer Service

8 a.m. - 7 p.m., EST, Monday-Friday, 9 a.m. – 6 p.m., EST, Saturday

1-888-HD-HUSKY

HUSKYTOOLS.COM

Retain this manual for future use.

Mobile workbench & Hutch

Husky HD 62 in. Hutch is only intended to be used with the Husky Heavy Duty system, which includes the following products :

Husky HD 62 in. 10-drawer Mobile Workbench

Model # H0TC6210BB1D

SKU # XXXXXXXXXX

Husky HD 62 in. Hutch

Model # H0TC62XDBB1U

SKU # XXXXXXXXXX

Husky HD 24 in. Tall Side Locker


Model # H0TC24XDBB1F

SKU # XXXXXXXXXX

Husky HD 55 in. Overhead Locker

Model # H0TC55XDBB1H

SKU # XXXXXXXXXX

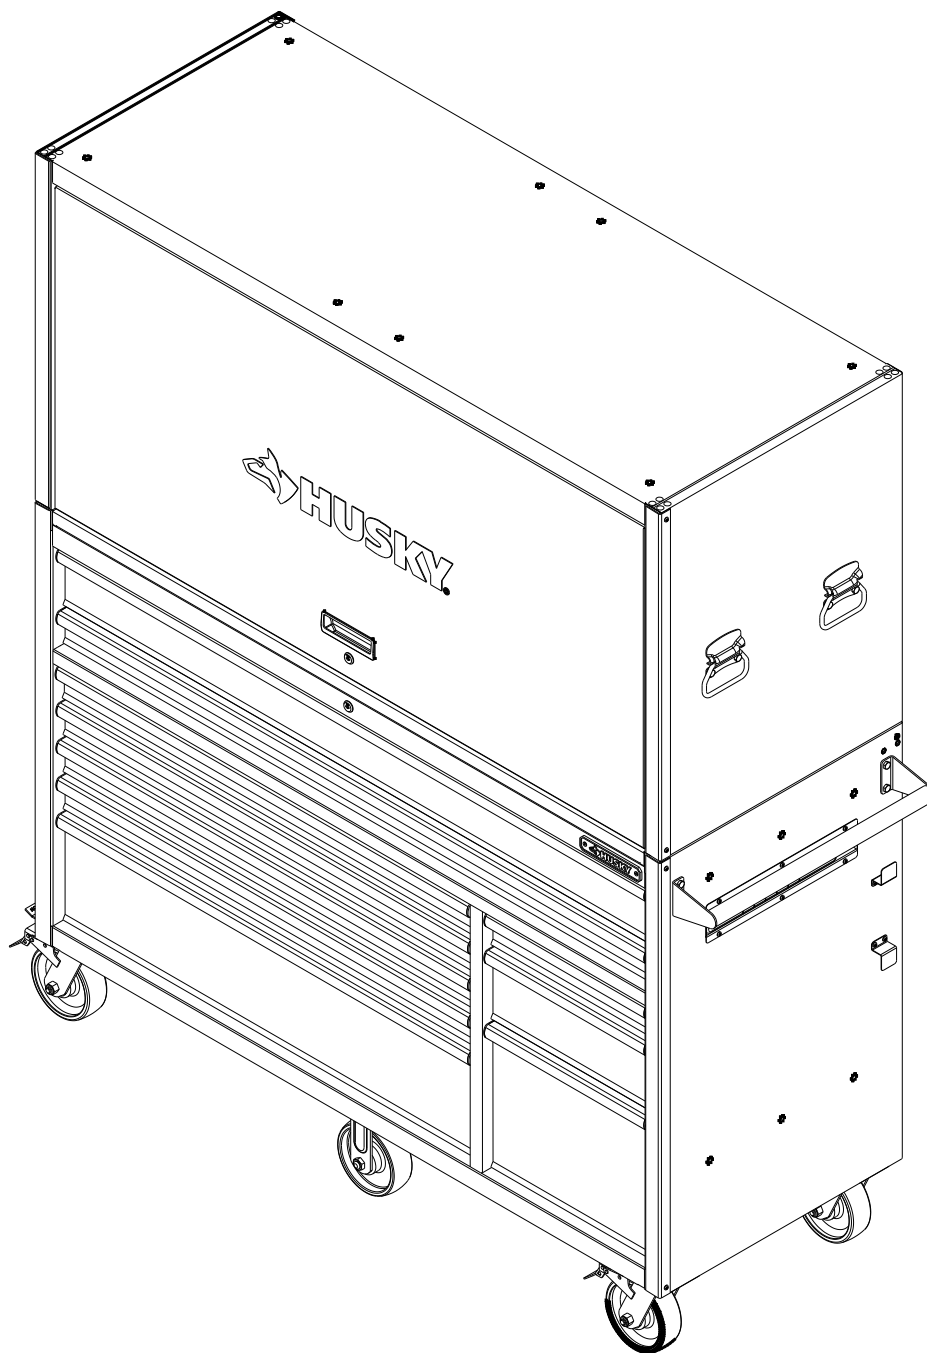


Assembly

1 Placing the hutch




NOTE: Two people may be required to complete this step.

- ☐ Place the Hutch (P) on top of the Rolling Cabinet (C).

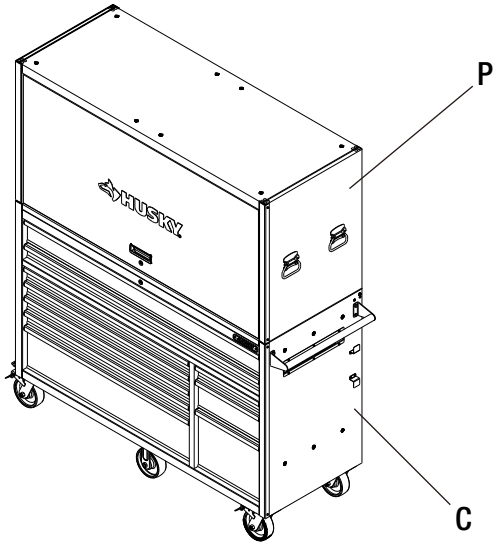

2 Installing the bolts

- ☐ Use 4 pcs M6*15mm bolts (CC) and 4 pcs M6 washer (II) to secure the Hutch along the sides and back to the Workbench.
- ☐ Tighten with a 8mm socket or wrench.

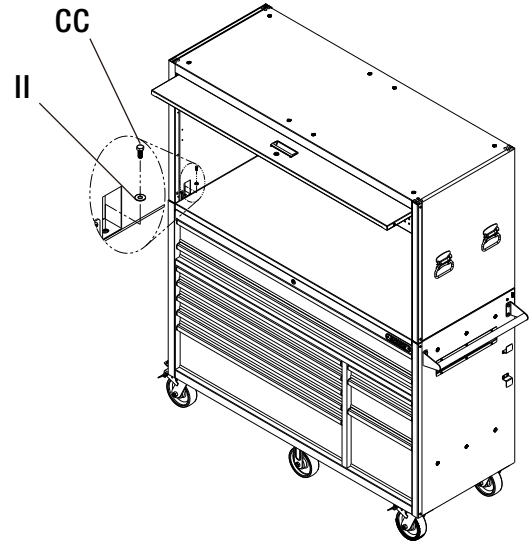


3 Installing the reinforcement panel

- ☐ Attach the Reinforcement Panel (Z2) to the back of the product to secure the Hutch (P) to the Rolling Cabinet (C).
- ☐ Place the brackets over the holes and secure with 4 pcs M6*12mm bolts (BB).
- ☐ Tighten all screws securely with a screwdriver.




NOTE: The holes in the cabinet are tapped and do not require nuts.

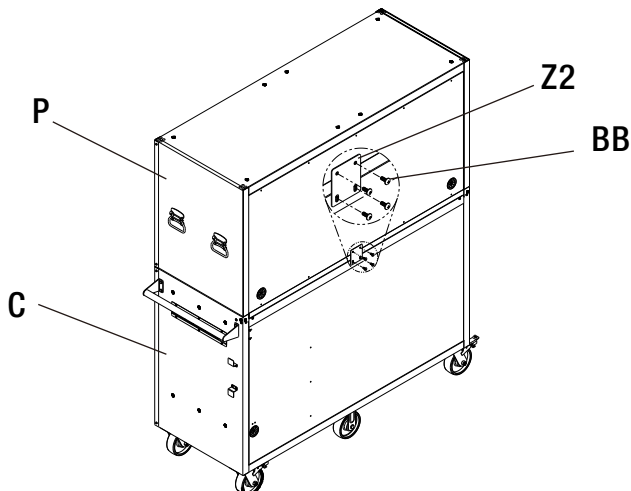

4 Inserting the plastic plugs

- ☐ Insert the Plastic Plugs (HH&II&JJ) into the remaining open holes on the side walls of the Cabinet (C) and the Hutch (P).

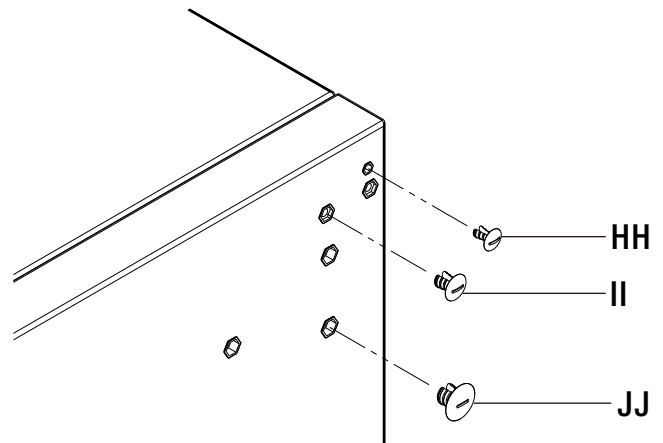

Mobile workbench & Hutch & Side locker

Husky HD 24 in. Tall Side Locker is only intended to be used with the Husky Heavy Duty system, which includes the following products :

Husky HD 62 in. 10-drawer Mobile Workbench

Model # H0TC6210BB1D

SKU # XXXXXXXXXX

Husky HD 62 in. Hutch

Model # H0TC62XDBB1U

SKU # XXXXXXXXXX

Husky HD 24 in. Tall Side Locker


Model # H0TC24XDBB1F

SKU # XXXXXXXXXX

Husky HD 55 in. Overhead Locker

Model # H0TC55XDBB1H

SKU # XXXXXXXXXX

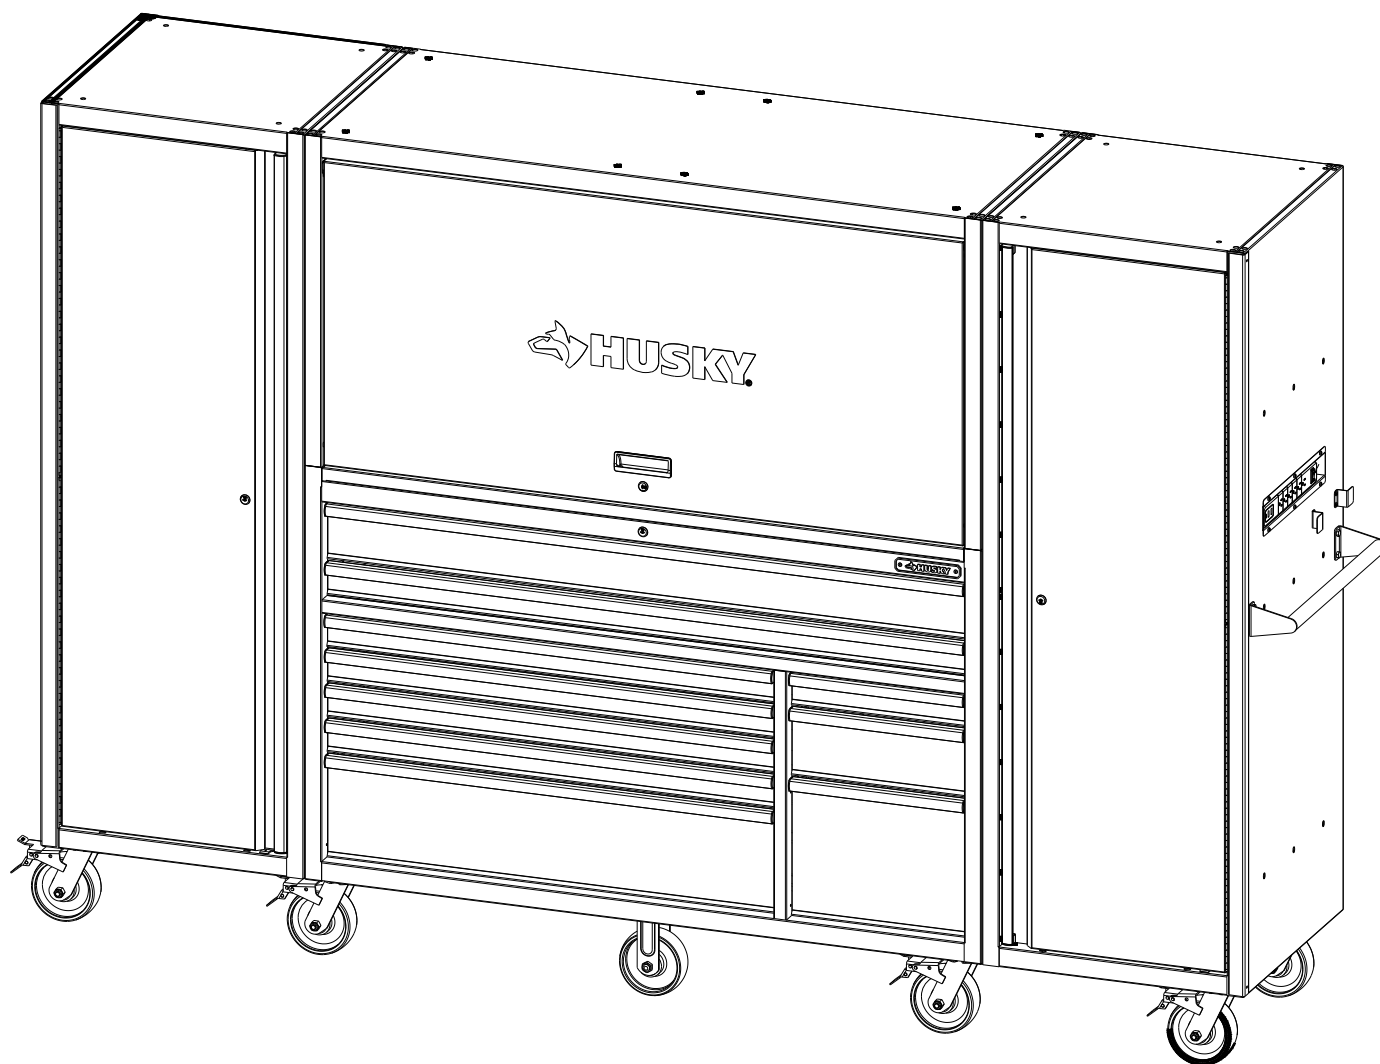


Assembly

1 Removing the side parts

- ☐ Remove the all side parts from the cabinet by loosening the bolts.



NOTE: If assembling the Side Locker (W) to left side of the workbench, then remove all parts on the left side of cabinets. If assembling the Side Locker (W) to right side of the workbench, then remove all parts on the right side of cabinets.

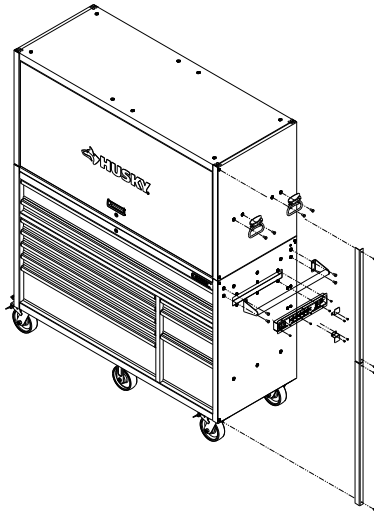


2 Attach Locker support base plate



CAUTION: Lock ALL wheels of the workbench.

- ☐ Attach the Support Base Plate (Z3) to the bottom of the Workbench by inserting 4 pcs M8*15mm bolts (FF) through the Support Base Plate (Z3).
- ☐ Tighten with a 8mm socket or wrench.

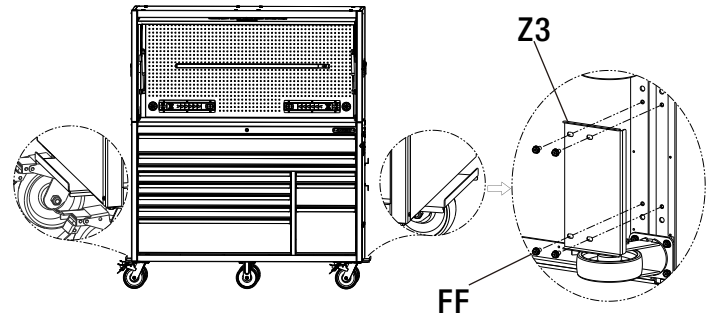


3 Removing the side parts and casters

- ☐ Remove the all side parts from the Side Locker (W) and 2 Casters (D) by loosening the bolts.




NOTE: If assembling side locker to the left side of the Workbench, then remove all parts all the right side of side locker. If assembling side locker to the right side of the Workbench, then remove all parts of the left side of the side locker.

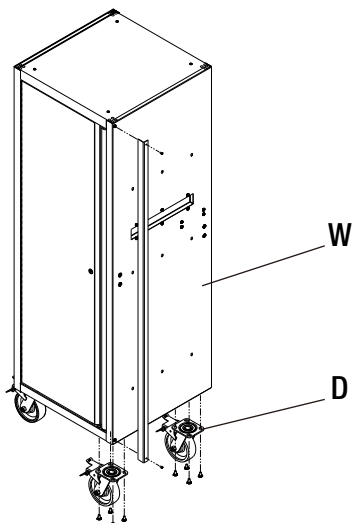

4 Move and align the cabinet


- ☐ With 2 or more people, gently lift up the Side locker (W) to fully seat on the Support Base Plate (Z3) to maintain balance.
- ☐ Ensure proper alignment of the bolt attachment holes.
- ☐ After aligned, lock the casters (D) of the side locker to prevent from moving.

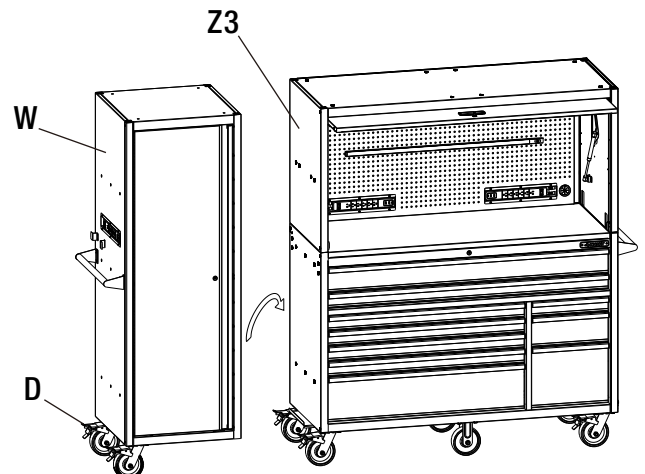

Assembly (continued)


5 Tightening the side locker

- ☐ Open the door of the side locker (W).
- ☐ Tighten the 9 bolts (FF) inside the panel.
- ☐ Tighten with a 8mm socket or wrench.

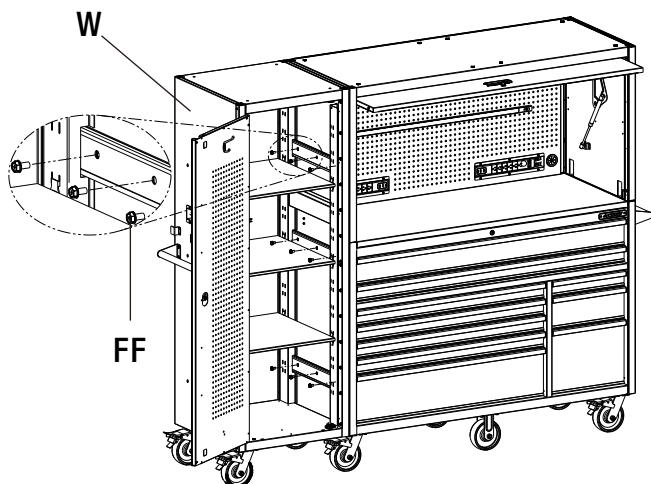

6 Inserting the plastic plugs

- ☐ Insert the Plastic Plugs (HH&II&JJ) into the remaining open holes on the side walls of the modular set.

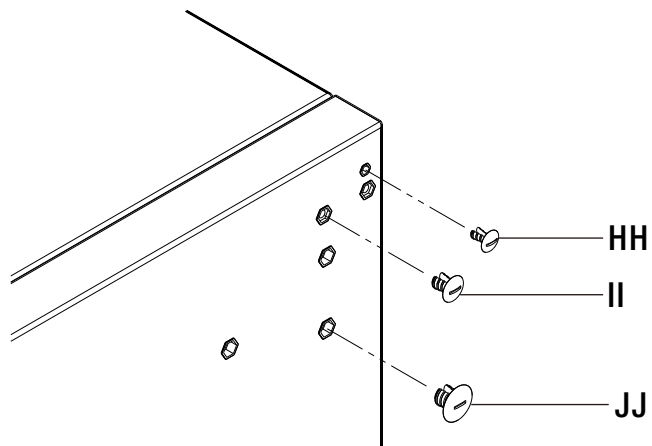

Mobile workbench & Hutch & Side locker & Overhead locker

Husky HD 55 in. Overhead Locker is only intended to be used with the Husky Heavy Duty system, which includes the following products :

Husky HD 62 in. 10-drawer Mobile Workbench

Model # H0TC6210BB1D

SKU # XXXXXXXXXX

Husky HD 62 in. Hutch

Model # H0TC62XDBB1U

SKU # XXXXXXXXXX

Husky HD 24 in. Tall Side Locker


Model # H0TC24XDBB1F

SKU # XXXXXXXXXX

Husky HD 55 in. Overhead Locker

Model # H0TC55XDBB1H

SKU # XXXXXXXXXX

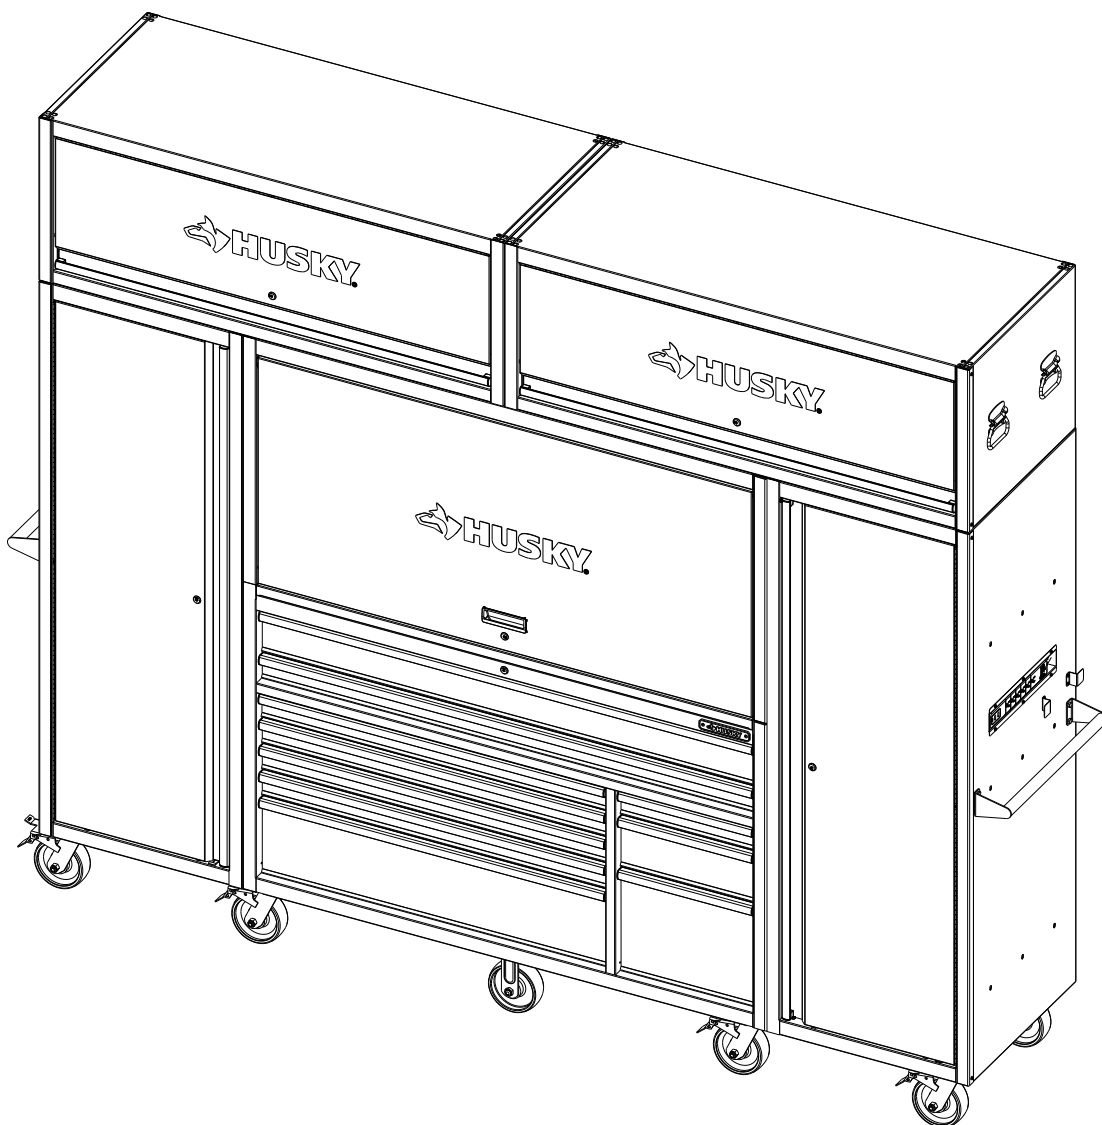


Assembly

1 Placing the overhead locker




NOTE: Two people may be required to complete this step.

- ☐ Place the Overhead Locker (X) on top of the modular set.

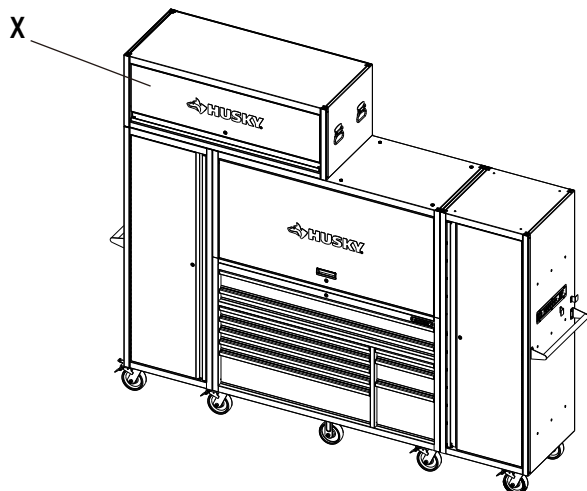


2 Installing the bolts.

- ☐ Use 4 pcs M8*60mm bolts (KK) and 4 pcs M8 washers (LL) to secure the overhead locker along the top of the modular set.
- ☐ Tighten all screws securely with a screwdriver.

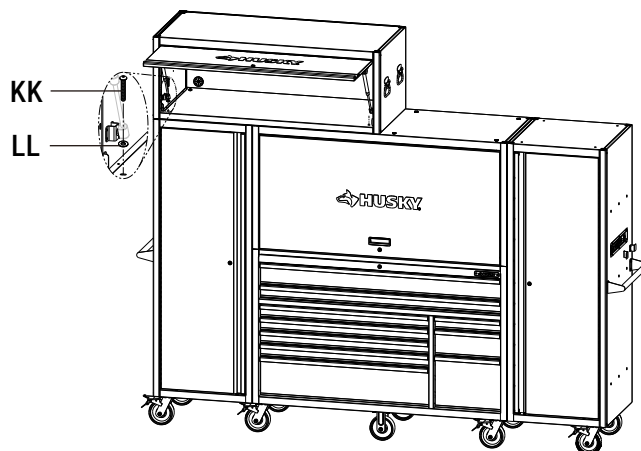


3 Removing the handles and corner guard

- ☐ Remove the Handles (O) and the Corner Guard (N) from the Overhead Locker (X) by loosening the bolts.

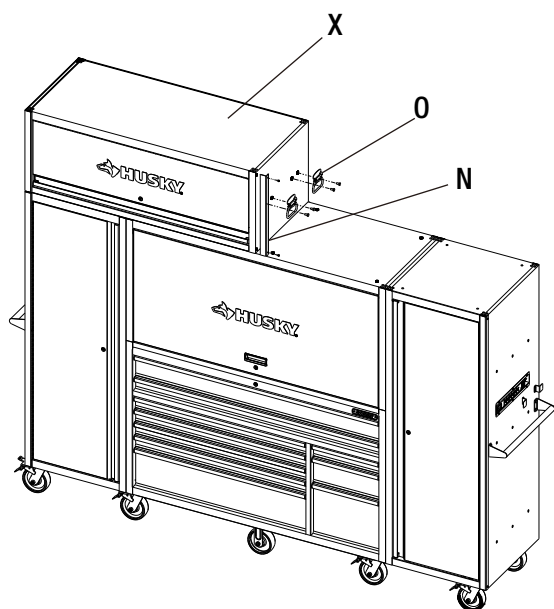

4 Inserting the plastic plugs

- ☐ Insert the Plastic Plugs (HH&II&JJ) into the remaining open holes on the side walls of the modular set.

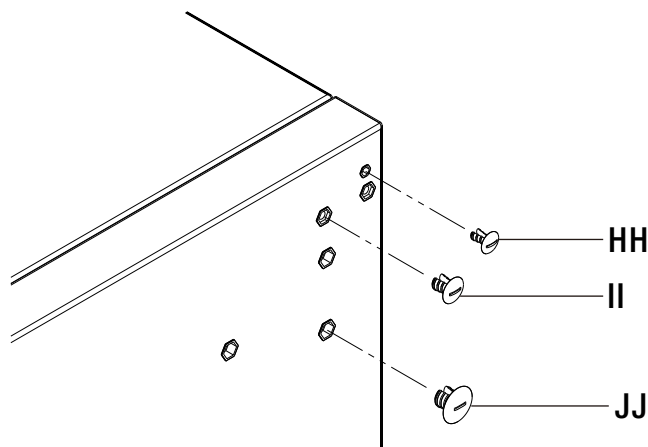



Questions, problems, missing parts? Before returning to the store, call

Husky Customer Service

8 a.m. - 7 p.m., EST, Monday-Friday, 9 a.m. – 6 p.m., EST, Saturday

1-888-HD-HUSKY

HUSKYTOOLS.COM

Retain this manual for future use.