



THD.com #1005 054 479
SKU/THD.com #1005 011 461
SKU/THD.com #1005 011 459
THD.com #1005 618 617
Model # HOTC7218B12M
Model # HOTC7218B31M/BJ1M
Model # HOTC7218JX1M


USE AND CARE GUIDE

HUSKY 72 IN. 18-DRAWER MOBILE WORKBENCH

Questions, problems, missing parts?
Before returning to the store, call
Husky Customer Service
8 a.m. - 7 p.m., EST, Monday-Friday
9 a.m. - 6 p.m., EST, Saturday

1 888 HD-HUSKY

HUSKYTOOLS.COM

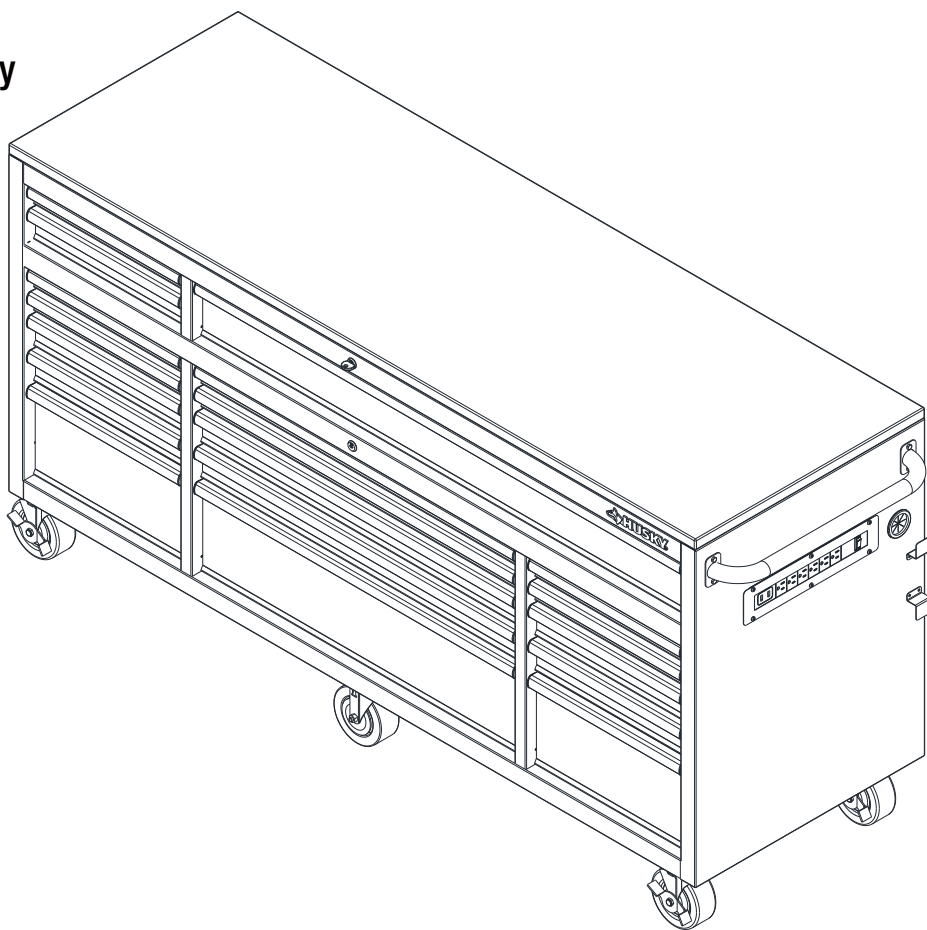

THANK YOU

We appreciate the trust and confidence you have placed in Husky through the purchase of this mobile workbench. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Husky!

Table of Contents

Table of Contents	2
Safety Information	2-3
Warranty	3
Pre-Assembly	4
Tools Required	4
Hardware Included	4
Specifications	4
Package Contents	5

Assembly	6
Operation	7
Maintenance	8
Care and Cleaning	8
Service Parts	9

Safety Information

1. Do not open more than one drawer at a time.
2. Do not let children approach the product.
3. To help prevent the product from tipping, load the product starting with the bottom drawers.
4. Keep locking the casters' brake set unless you are moving the cabinet. This will help to prevent the product from rolling.
5. Lock all drawers before moving the product.
6. Make sure all drawers close tightly before locking/unlocking.
7. Do not step in any drawer/drawers.
8. When moving this product, push it rather than pull it.
9. Do not alter this product in any manner.

Plug and Outlet Safety




WARNING: Chest/cabinet plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earth (grounded) chest/cabinet power strips. Unmodified plugs and matching outlets will reduce risk of electric shock.



WARNING: Avoid body contact with earthed or grounded surfaces such as pipes, radiators, ranges and refrigerators. There is increased risk of electric shock if your body is earthed or grounded.



WARNING: Chests/cabinets marked "Grounding Required" have a power strip with a three wire cord and three prong grounding plug. The plug must be connected to a properly grounded outlet (See Figure). If the power strip should electrically malfunction or break down, grounding provides a low resistance path to carry electricity away from the user, reducing the risk of electric shock. The grounding prong in the plug is connected through the green wire inside the cord to the grounding system in the power strip. The green wire in the cord must be the only wire connected to the power strip's grounding system and must never be attached to an electrically "live" terminal. Your power strip must be plugged into an appropriate outlet, properly installed and grounded in accordance with all codes and ordinances.



DANGER: Do not stand on this product. You may fall or cause the product to tip.



DANGER: Do not move the product prior to closing and locking all the drawers. The drawers could come open and make the product unstable and tip.



DANGER: Do not mount this product on a truck bed or any other moving object.



WARNING: Keep the product on a level surface. The product may become unstable and tip if stored or moved on an uneven surface.



CAUTION: Do not lift this product directly with a forklift or tow with any mechanical devices.



CAUTION: Do not exceed the maximum product weight, including contents. Do not exceed the maximum weight for each drawer. See Specifications on page 4.



CAUTION: Only transport this product when empty. Properly secure when transporting.

Safety Information (continued)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.



NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



CAUTION: Do not use the side handle as a point of leverage to lift the unit off of the ground. Handle is not intended to withstand the force of vertical lifting, and is only designed to aid in the movement of unit around on casters. Failure to adhere to this warning may cause handle to break and cause personal injury and/or product damage.

The Responsible party information:

Clearwater Metal Vn JSC

Lot CN2, Mai Trung IZ, An Tay Village, Ben Cat Town, Binh Duong Province, Vietnam. Tel: +84.274.3581.773

Product name: Power strip 6 outlets with 2 USB ports

Model# K2415009 / K2415014

Warranty

The manufacturer warrants the product to be free from defects in materials and workmanship for a period of three (3) years from date of purchase. This warranty applies only to the original consumer and only to products used in normal use and service. If this product is found to be defective, the manufacturer's only obligation, and your exclusive remedy, is the repair or replacement of the product at the manufacturer's discretion, provided that the product has not been damaged through misuse, abuse, accident, modifications, alteration neglect or mishandling. This warranty shall not apply to any product that is found to have been improperly installed, set-up, or used in any way not in accordance with the instructions supplied with the product. This warranty shall not apply to a failure of the product as a result of an accident, misuse, abuse, negligence, alteration, faulty installation, or any other failure not relating to faulty material or workmanship. This warranty shall not apply to the finish on any portion of the products such as surface and/or weathering, as this is considered normal wear and tear.

The manufacturer does not warrant and specifically disclaims any warranty, whether express or implied, of fitness for a particular purpose, other than the warranty contained herein. The manufacturer specifically disclaims any liability and shall not be liable for any consequential or incidental loss or damage, including but not limited to any labor/expense costs involved in the replacement or repair of said product.

Contact the Customer Service Team at 1-888-HD-HUSKY or visit www.huskytools.com.

Pre-assembly

TOOLS REQUIRED



Phillips
screwdriver



Safety
goggles


HARDWARE INCLUDED




NOTE: Hardware not shown to actual size.



AA



BB



CC

Part	Description	Quantity
AA	Bolt M4 x 10L	4
BB	Bolt M6 x 15L	4
CC	10MM/13MM Wrench	1


SPECIFICATIONS

Maximum capacity (drawer)	100 lbs
Maximum capacity (bottom deep drawers)	200 lbs
Maximum capacity (total unit)	1,800 lbs



NOTE: Begin product assembly close to the final intended location of your mobile workbench. This product is heavy and may be difficult to move after assembly.

PACKAGE CONTENTS

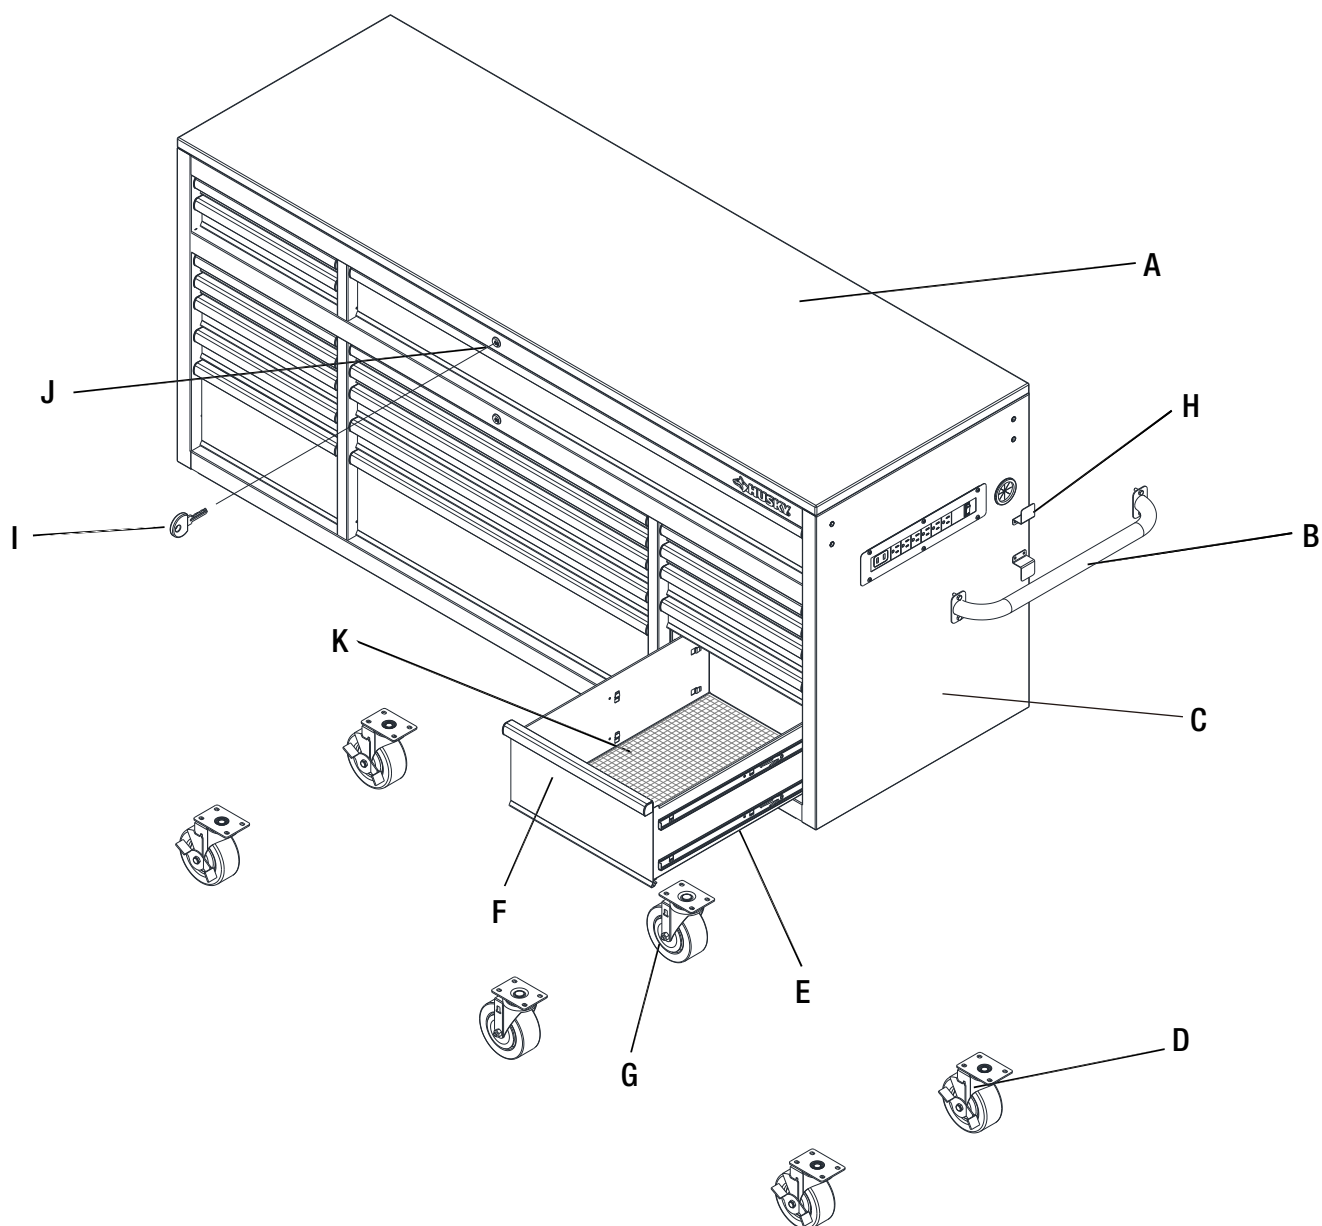

Part	Description	Quantity
A	Wood top	1
B	Side handle	1
C	Rolling cabinet	1
D	Swivel caster with brake	4
E	Drawer slide 100 lbs (pair)	22
F	Drawer	18
G	Swivel caster	2
H	Power strip bracket	2
I	Key (set)	1
J	Lock	2
K	Drawer liner	18


Assembly

1 Attaching the side handle

- ☐ Attach the side handle (B) to the cabinet using four bolts (BB).
- ☐ Tighten all bolts with the 10 mm wrench (CC).
Do not over tighten the bolts to avoid damage to the finish.



NOTE: The holes in the cabinet are tapped and do not require nuts.

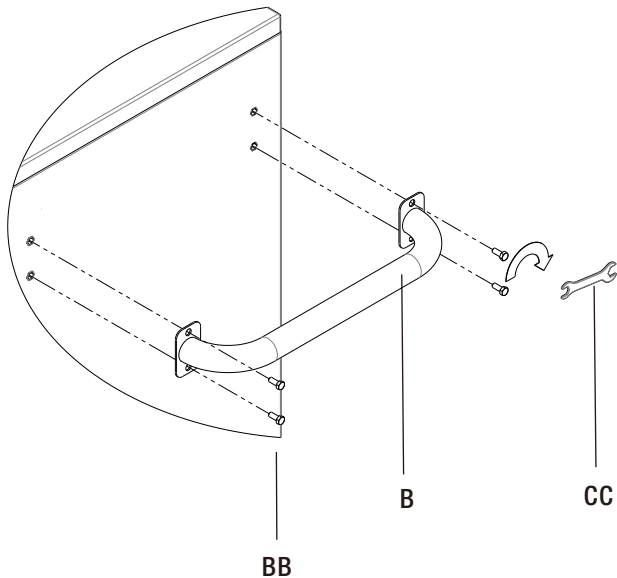


2 Attaching the power strip brackets

- ☐ Attach the power strip brackets (H) to the cabinet using four bolts (AA).
- ☐ Tighten all bolts using a screwdriver.
Do not over tighten the bolts to avoid damage to the finish.




NOTE: The holes in the cabinet are tapped and do not require nuts.

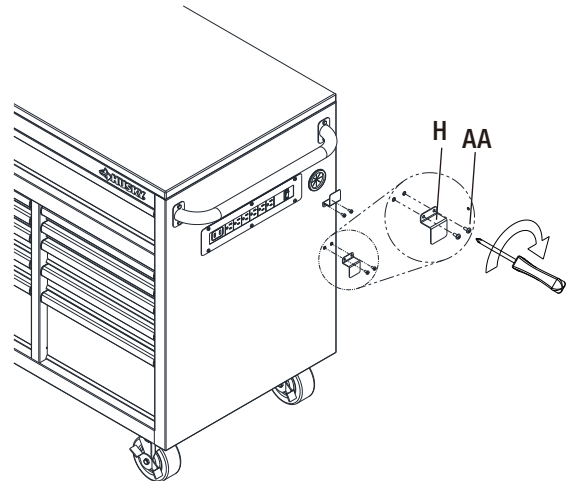

3 Installing the drawer liners

- ☐ Place the drawer liners (K) in appropriately-sized drawers to protect the surface.

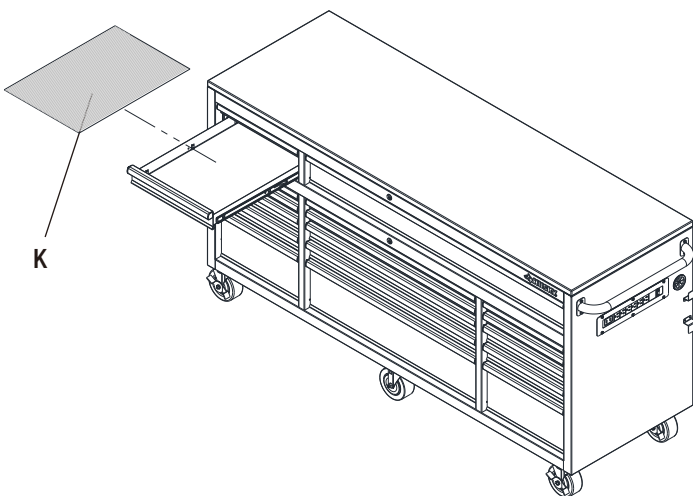


Operation

1 Locking and unlocking the unit




IMPORTANT : The drawers must be fully closed before locking / unlocking the unit.

- ☐ To lock the unit, insert the key (I) into the lock (J) and turn it one quarter turn counterclockwise. Then remove the key.
- ☐ To unlock the unit, insert the key (I) into the lock (J) and turn it one quarter turn clockwise. Then remove the key.

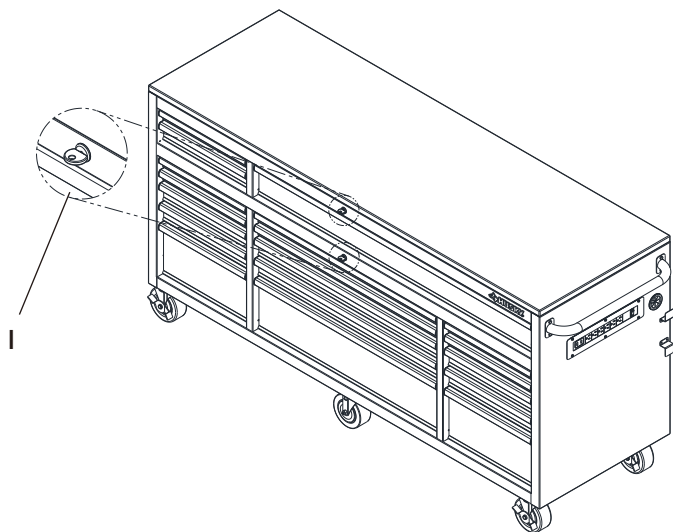


2 Removing the drawers

- ☐ Fully extend and empty the drawer.
- ☐ On the slide, lift up the plastic release lever on one slide and push down the plastic release lever on the other slide. Gently pull the drawer out so the slides can ride over the stops.

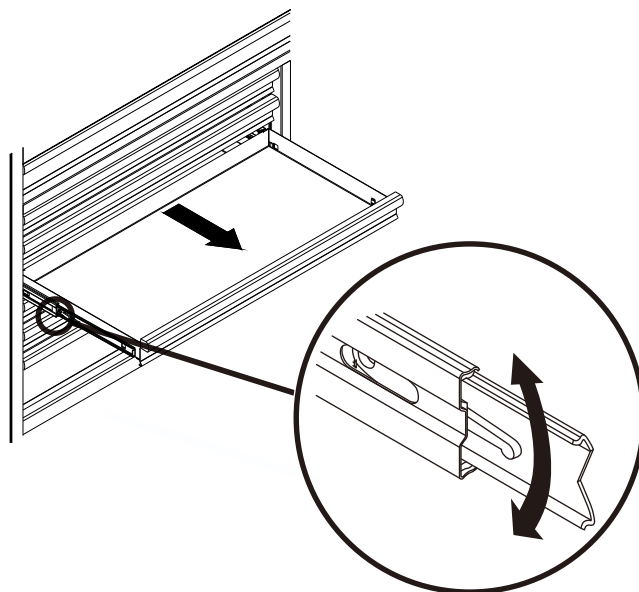

3 Installing the drawers


- ☐ Pull the slides and slide carrier out until fully extended.
- ☐ Hold the slide on the cabinet while aligning it with the slide on the drawer.
- ☐ Slightly insert one side and repeat for the other side.
- ☐ Slowly push the drawer until it is fully closed to engage the slide.
- ☐ Open the drawer and close it to verify proper operation.

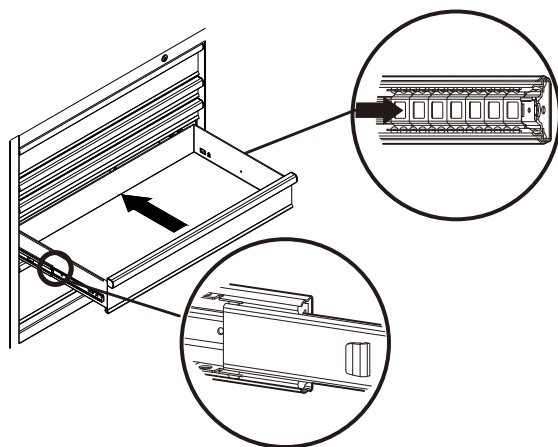

Maintenance


1 Maintaining the casters

- ☐ Grease the casters annually using high quality bearing grease.

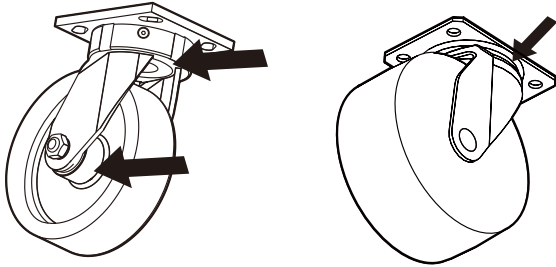


2 Maintaining the drawers

- ☐ Periodically clean the drawer trim and inside the drawers with a mild detergent and water.
- ☐ Remove grease and oil with a standard, nonflammable cleaning fluid.
- ☐ The use of drawer liners is recommended to protect the finish inside the drawers and make the drawers easier to clean. Drawer liners can be purchased at The Home Depot.
- ☐ Lubricate the slides semi-annually with grease or equivalent.

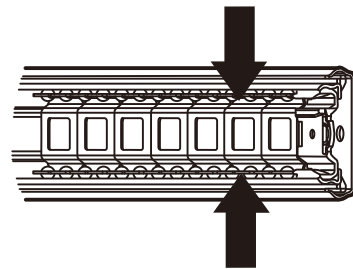

Care and Cleaning

- ☐ This steel product has been coated with industrial powder coating for a durable finish. To help protect this finish, do not allow harsh chemicals such as oil or grease to remain on the powder coating surface. Use a glass cleaner (Windex® or equivalent product) to clean and maintain all powder coated surfaces.
- ☐ The wood top is made of Parawood (also called Rubberwood) which has UV coating to help protect it from moisture. It can be cleaned with most household cleaners, such as Windex®.

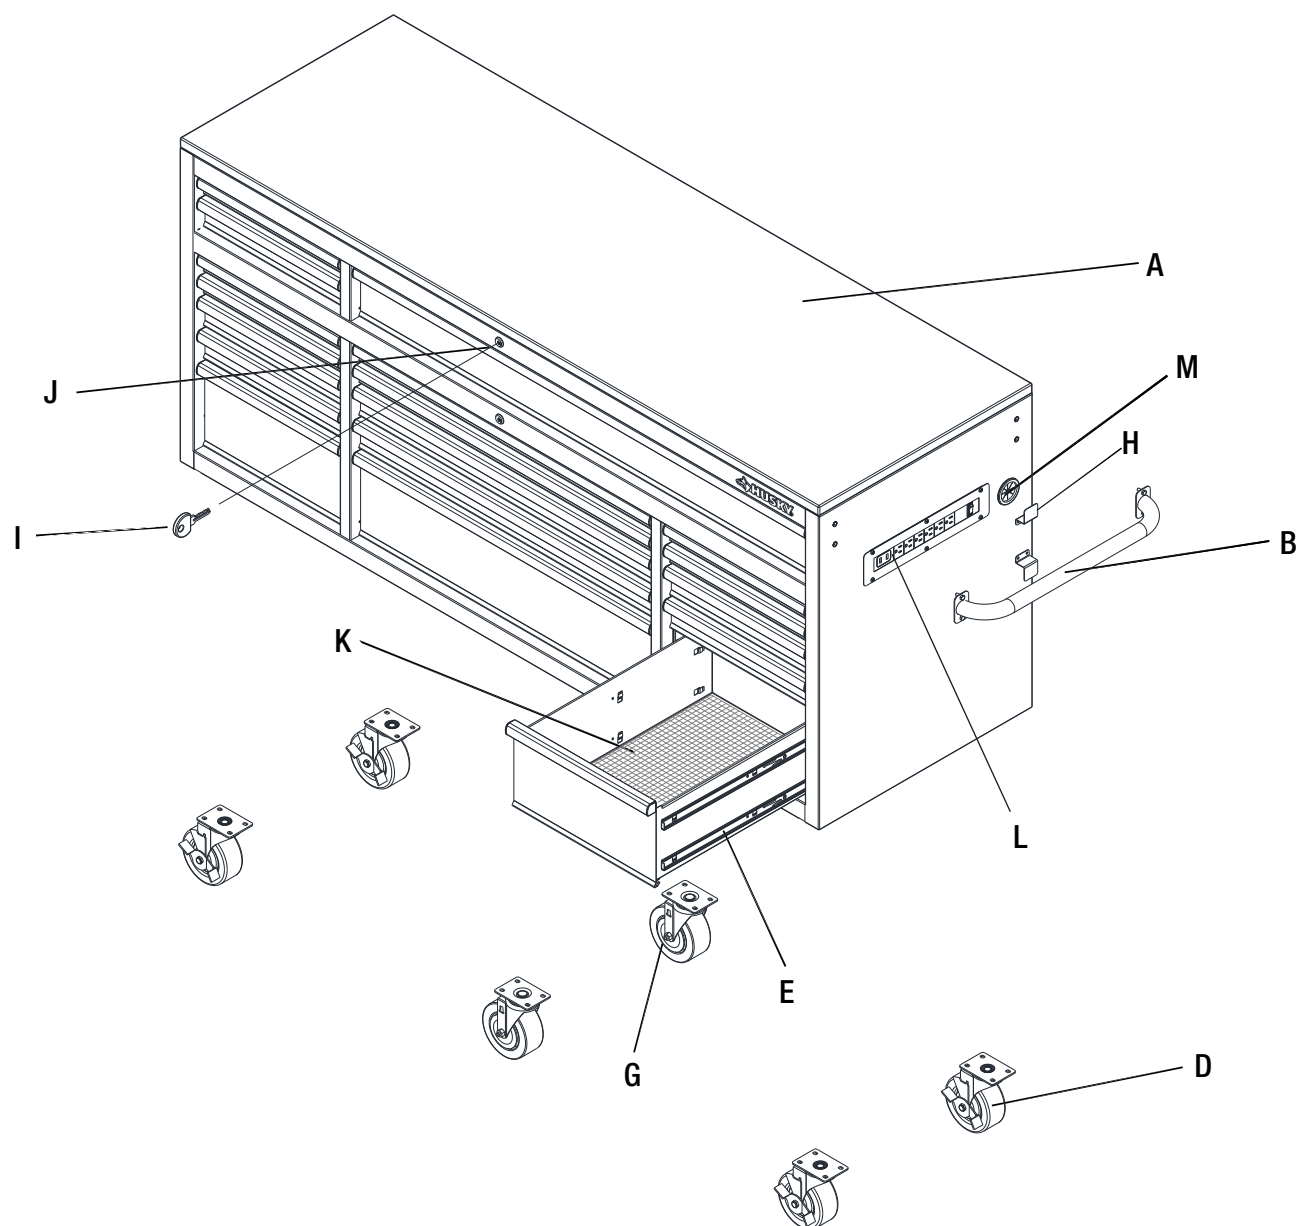

Part	Description	Quantity
A	Wood top	1
B	Side handle	1
D	Swivel caster w/brakes	4
E	Drawer slide 100 lbs (pair)	22
G	Swivel caster	2
H	Power strip bracket	2
I	Key (set)	1
J	Lock	2
K	Drawer liner	18
L	Power strip	1
M	Grommet	1



Questions, problems, missing parts? Before returning to the store,
call Husky Customer Service
8 a.m.-7 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m. EST Saturday

1-888-HD-HUSKY

HUSKYTOOLS.COM

Retain this manual for future use.



THD.com # 1005 944 656
Model # HOAA52JX1

USE AND CARE GUIDE

HUSKY 52-72 IN. ADJUSTABLE PEGBOARD

Questions, problems, missing parts?

Before returning to the store, call


Husky Customer Service

8 a.m. - 7 p.m., EST, Monday-Friday,

9 a.m. - 6 p.m., EST, Saturday

1-888-HD-HUSKY

HUSKYTOOLS.COM

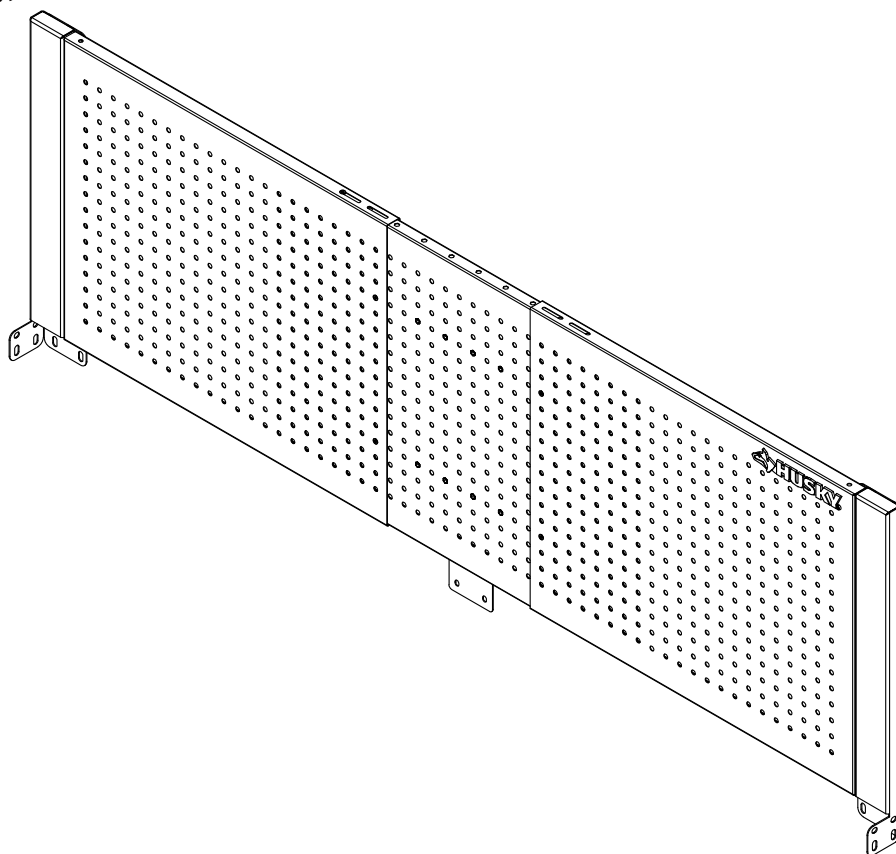

THANK YOU


We appreciate the trust and confidence you have placed in Husky through the purchase of this pegboard. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Husky!


Table of Contents


Table of Contents	2	Assembly	6-7
Safety Information	2	Operation	8
Warranty	3	Care and Cleaning	8
Pre-Assembly	4	Service Parts	9
Tools Required	4		
Hardware Included	4		
Specifications	4		
Package Contents	5		


Safety Information

- 1. Do not let children approach the product.
- 2. Do not alter this product in any manner.

**DANGER:** Do not stand on this product. You may fall or cause the product to tip.

**WARNING:** When assembled to a workbench, keep the unit on a level surface. The unit may become unstable and tip if stored or moved on an uneven surface.

**CAUTION:** Do not exceed the maximum weight loading capacity. See Specifications on page 4.

**CAUTION:** Only transport this product when empty. Properly secure when transporting.

Warranty

The manufacturer warrants the product to be free from defects in materials and workmanship for a period of three (3) years from date of purchase. This warranty applies only to the original consumer and only to products used in normal use and service. If this product is found to be defective, the manufacturer's only obligation, and your exclusive remedy, is the repair or replacement of the product at the manufacturer's discretion, provided that the product has not been damaged through misuse, abuse, accident, modifications, alteration neglect or mishandling. This warranty shall not apply to any product that is found to have been improperly installed, set-up, or used in any way not in accordance with the instructions supplied with the product. This warranty shall not apply to a failure of the product as a result of an accident, misuse, abuse, negligence, alteration, faulty installation, or any other failure not relating to faulty material or workmanship. This warranty shall not apply to the finish on any portion of the products such as surface and/or weathering, as this is considered normal wear and tear.

The manufacturer does not warrant and specifically disclaims any warranty, whether express or implied, of fitness for a particular purpose, other than the warranty contained herein. The manufacturer specifically disclaims any liability and shall not be liable for any consequential or incidental loss or damage, including but not limited to any labor/expense costs involved in the replacement or repair of said product.


Contact the Customer Service Team at 1-888-HD-HUSKY or visit www.huskytools.com.

Pre-assembly

TOOLS REQUIRED



Safety goggles



Power drill



Phillips screwdriver



10 mm. socket



1/8 in. drill bit


HARDWARE INCLUDED



NOTE: Hardware not shown to actual size.




AA



BB



CC




DD

Part	Description	Quantity
AA	Screw M4 x 10L	8
BB	Screw M6 x 12L	20
CC	Bolt 1/4" x 3/4"	10
DD	10 mm/13 mm wrench	1

SPECIFICATIONS

Maximum capacity	150 lbs
------------------	---------

PACKAGE CONTENTS

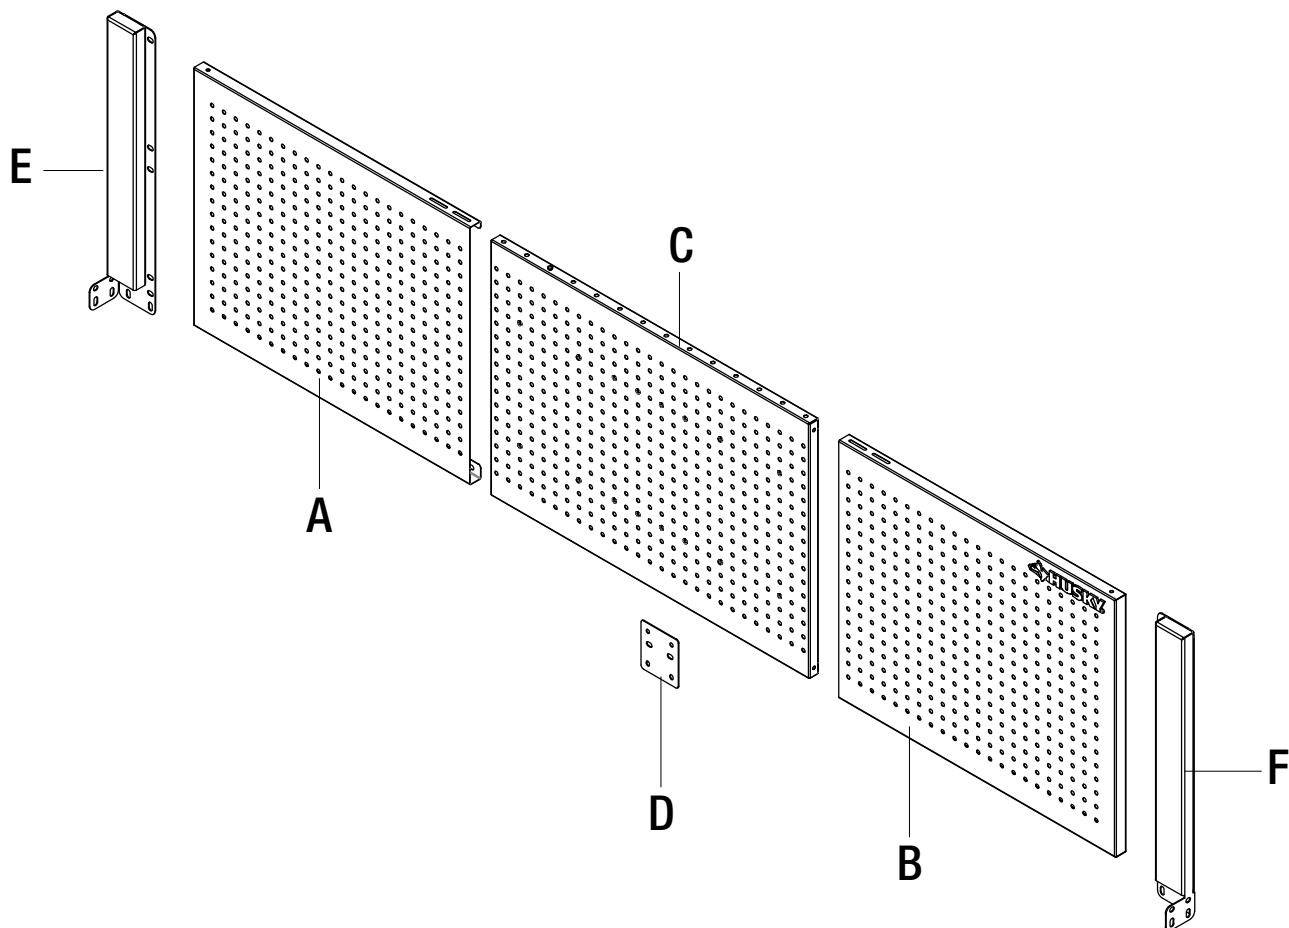

Part	Description	Quantity
A	Left pegboard panel	1
B	Right pegboard panel	1
C	Middle Pegboard panel	1
D	Reinforcement panel	1
E	Left Support post	1
F	Right Support post	1


Assembly

A. Mounting the Pegboard to Husky Mobile Workbench




WARNING: Use special care to not over-tighten any of the screws to avoid damage to the pegboard or mobile workbench.


1. Place the right support post (F) on the back of the mobile workbench. Ensure the support post is flush and level. Attach the right support post (F) to the back of the mobile workbench using four screws (BB).
2. Repeat step 1 for left support post (E) .

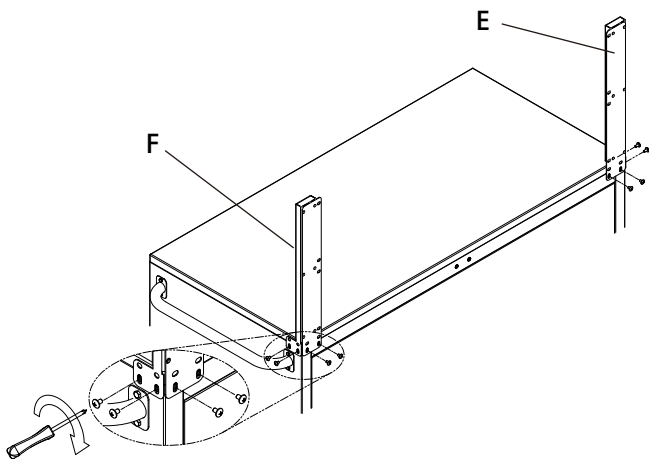


3. Attach the left pegboard panel (A) to the left support post (E) using four screws (BB). Secure the pegboard to the post, but do not tighten at this time.

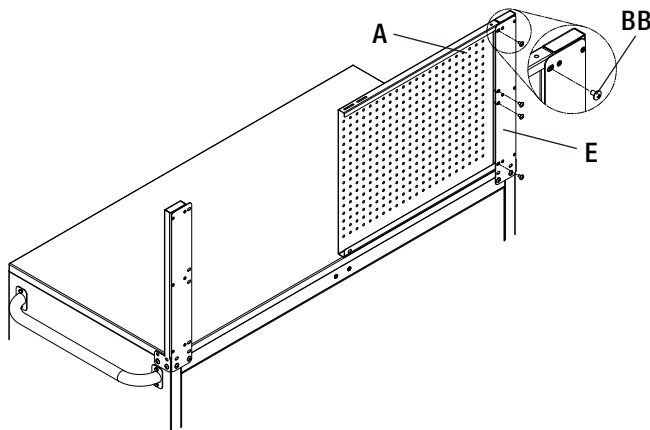

4. Insert the middle pegboard panel (C) to the left pegboard (A) and push it to the deepest position.

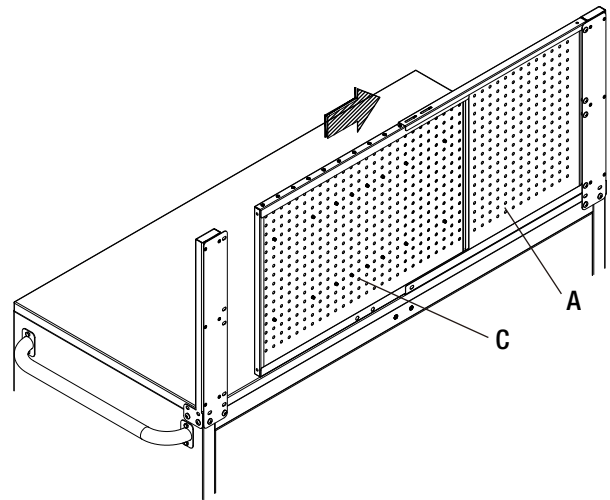


5. Attach the right pegboard panel (B) to the right support post (F) using four screws (BB). Secure the pegboard to the post, but do not tighten at this time.
6. Pull the middle pegboard panel (C) back to middle position.

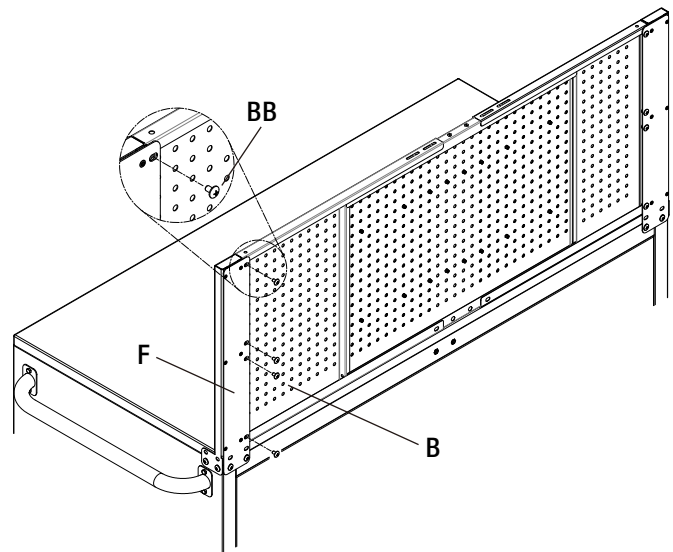


Assembly (continued)

7. Secure the three panels to each other by using four screws (AA) to the front side of panels first and four on the top of panels.

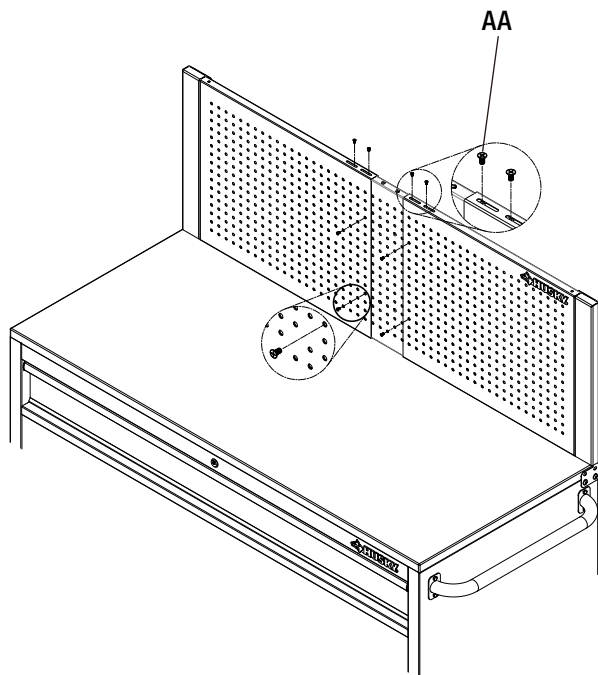


8. Attach the reinforcement panel (D) to the middle pegboard panel (C) and workbench by using four screws (BB).

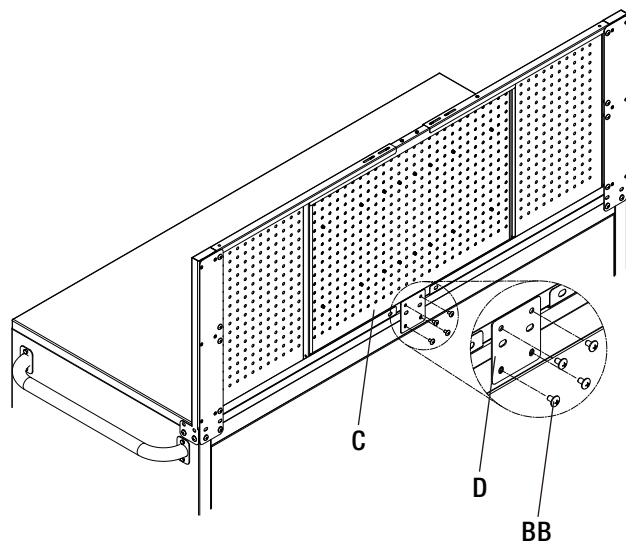

9. Using a power drill and 1/8 in. drill bit, drill four holes into the sides and back of the wood top of the workbench on right support post (F). Ensure you drill on a level plane and only 3/4 in. depth into the wood top to avoid damage to the mobile workbench.


10. Repeat step 9 to drill four holes for the other support post (E) and two holes for panel (D).

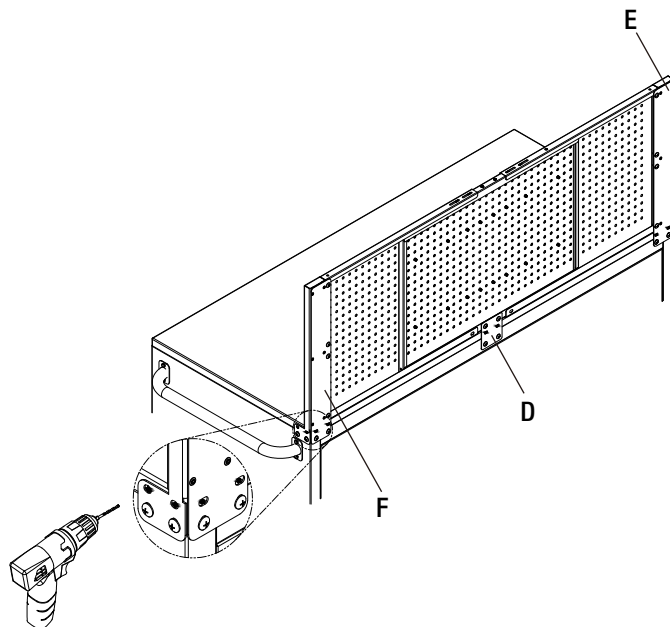

11. Secure the right support post (F) to the back of the mobile workbench using four bolts (CC) and a 10 mm socket. Secure the post but do not tighten the screws at this time so that the support post has some movement.

12. Repeat step 11 to attach the left support post (E) and using two bolts (CC) to attach the reinforcement panel (D).

13. Tighten all screws at this step.

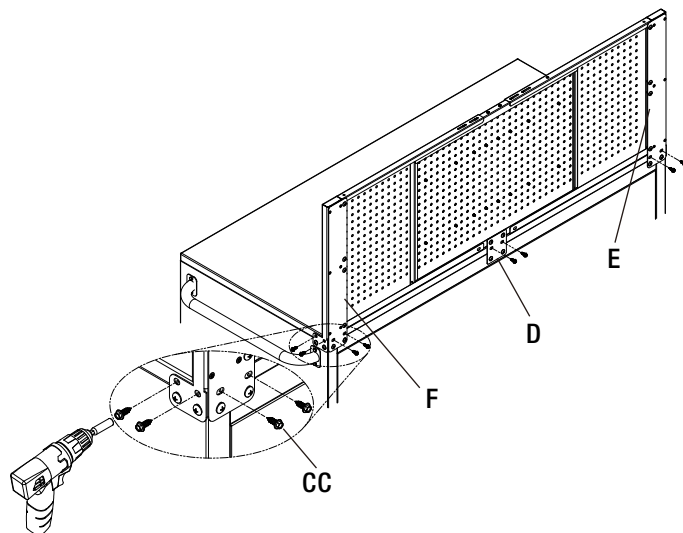


Operation

The peg holes will accommodate all standard size 1/8 in. and 1/4 in. peg hooks.

Care and Cleaning

- ☐ To help protect this finish, do not allow harsh chemicals such as oil or grease to remain on the surface. Use a glass cleaner (Windex® or equivalent product) to clean and maintain all stainless surfaces.

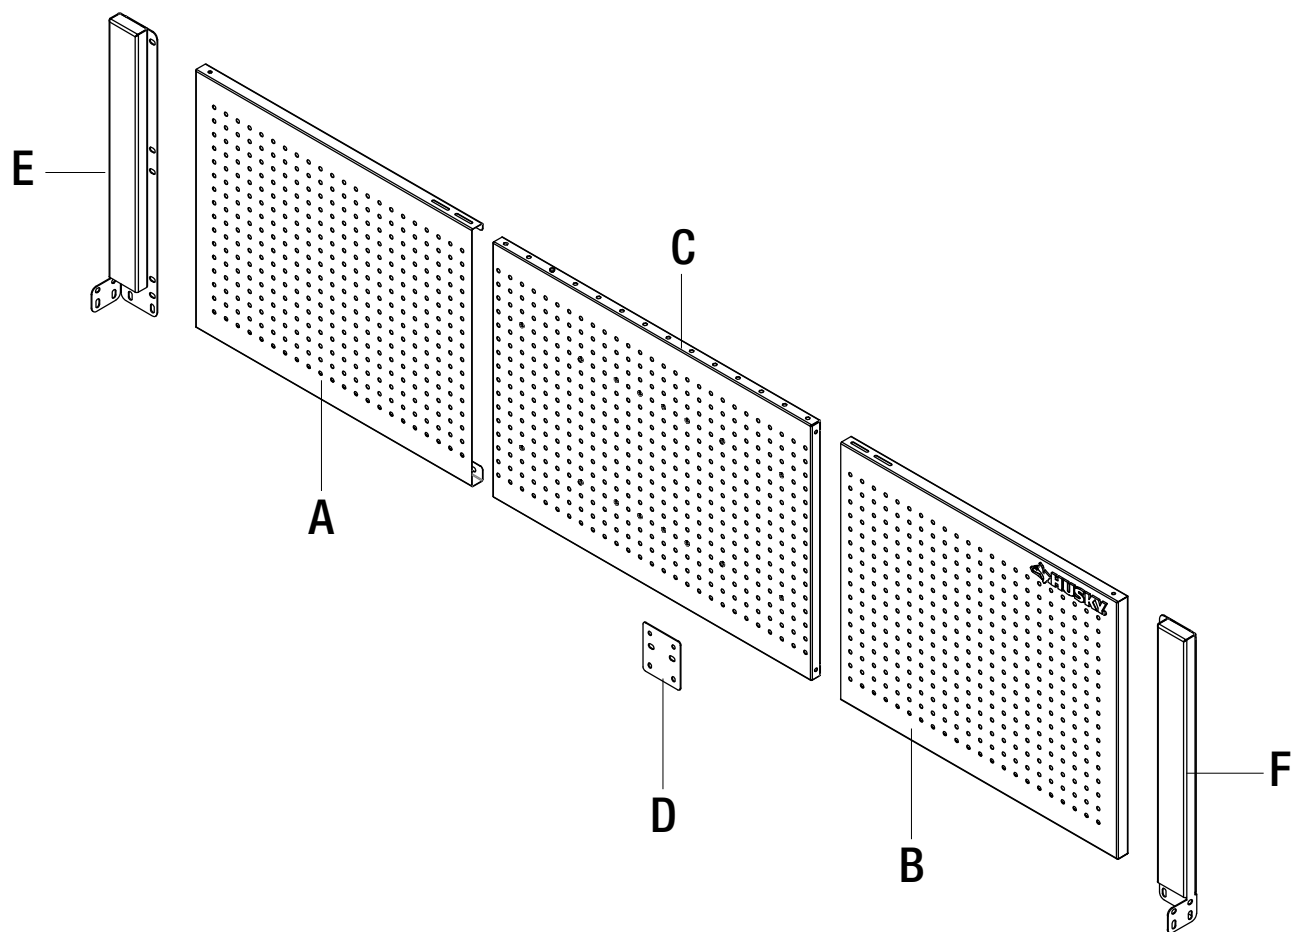

Part	Description	Quantity
A	Left pegboard panel	1
B	Right pegboard panel	1
C	Middle Pegboard panel	1
D	Panel Reinforcement	1
E	Left Support post	1
F	Right Support post	1



Questions, problems, missing parts? Before returning to the store, call
Husky Customer Service
8 a.m.-7 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m. EST Saturday

1-888-HD-HUSKY

HUSKYTOOLS.COM

Retain this manual for future use.