








# INSTALLATION


## Required Tools

Required tools for installation. Please have these tools prepared prior to installation.

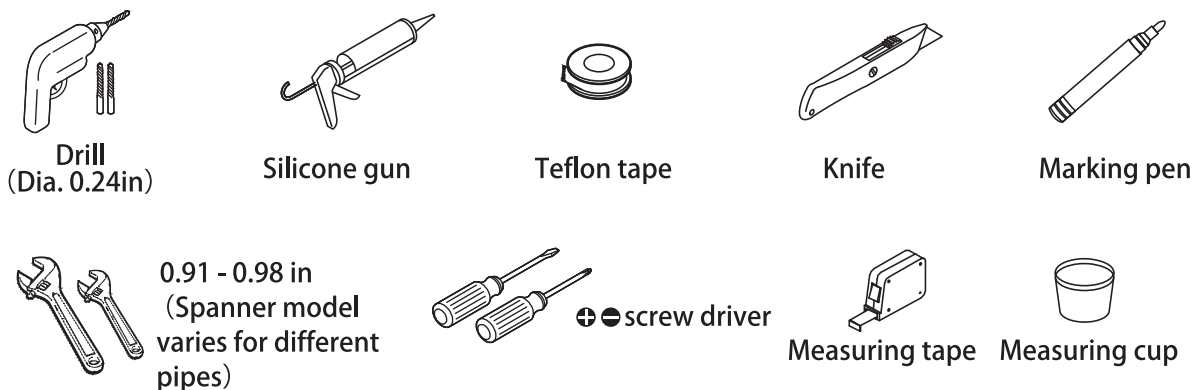

## Item List (Confirm all are included in the box)
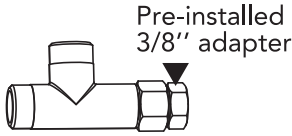
|  |  |  |
|--|--|--|
| <p>Intelligent toilet(1 set)</p>  | <p>T-valve(1 pc)</p>  <p>Pre-installed 3/8" adapter</p> <p>(G1/2,G1/2,G1/2)</p> | <p>Remote controller set(1 set)</p>  <p>(holder 1 pc , screw 2 pcs)</p> |
| <p>Two AAA Battery</p>            | <p>Wax ring(1 pc )</p>    | <p>Installation Book &amp; User Manual</p>                              |

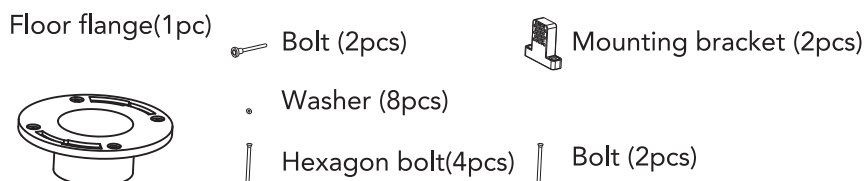

※ Please confirm all the aforementioned items are inside the package.  
If there are any omissions, please contact our customer service.

※ Illustrations above are for references only, Actual objects may look different in person.

※ If your water valve is 3/8, you could directly connect the T-valve; If your water valve is 1/2, please screw off the adapter, then connect it.

# BEFORE YOU INSTALL


Water pressure check, dimensional drawing.

## Checking your water supply


The lowest working water pressure is 0.08MPa, the highest water pressure is 0.75MPa, the toilet can not reach the best clean situation when the lowest water pressure can not reach 0.08MPa.

## Confirm dimensions of product with installation space


Wall

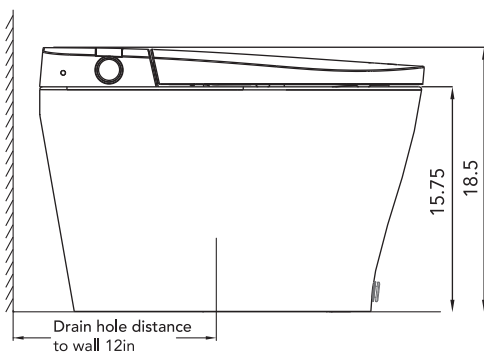

Side profile



Front view

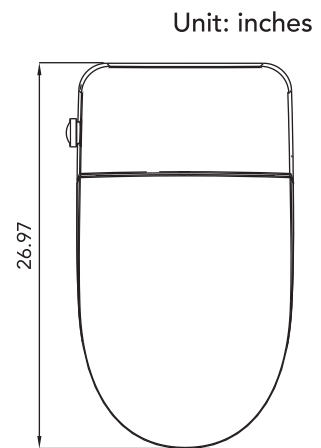

Top view


Unit: inches

# INSTALLING YOUR PRODUCT

Install your unit using the following steps


## 1 Open the box right side up

Remove the accessories first, then remove the unit from the top, as shown in the diagrams below.

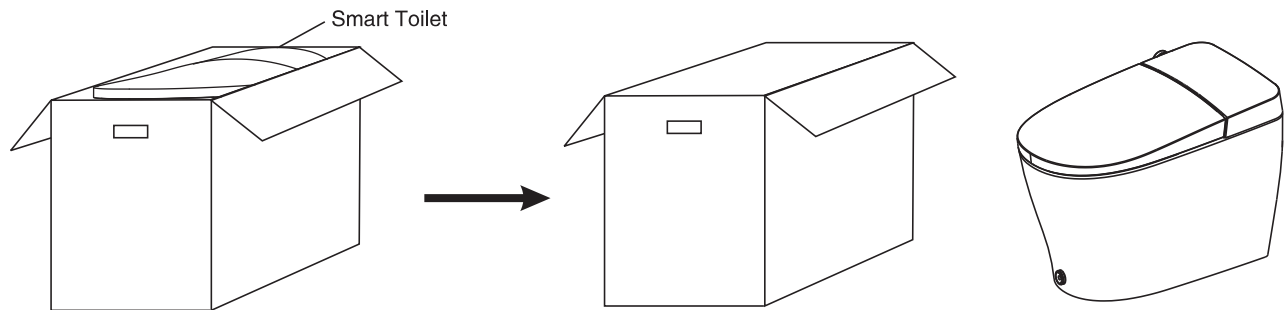


## 2 Mark your drainage hole with a cross


1. Align the flange with the drain hole, and mark the positions of the four mounting holes of the flange on the ground with a marking pen.

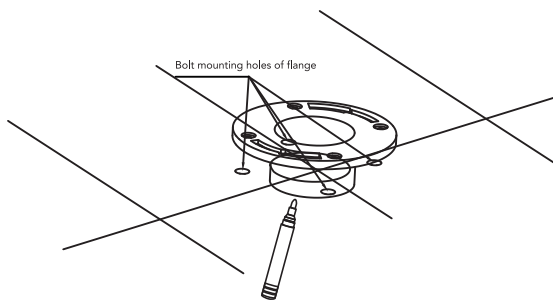


2. Place the toilet on the ground with aligning the ground drain hole, place two fixing blocks in the openings on the left and right sides of the toilet bottom, mark the screw mounting hole positions of the fixing block with a marking pen, and then remove the toilet.

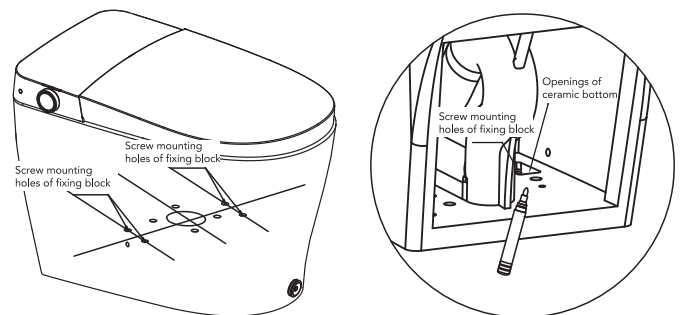

3 1. Put the flange on the drain hole, and fix it on the ground with four bolts. Then Seal the flange with glass glue.

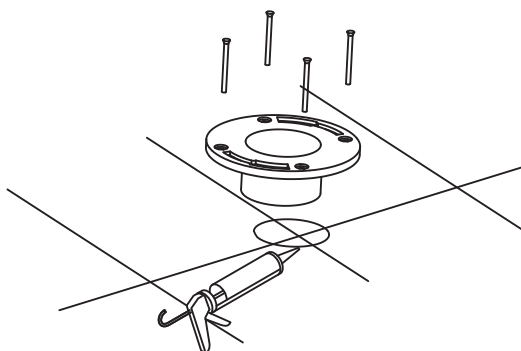


2. Place the fixing block on the installation position marked by the line drawing pen and fasten it with two bolts.

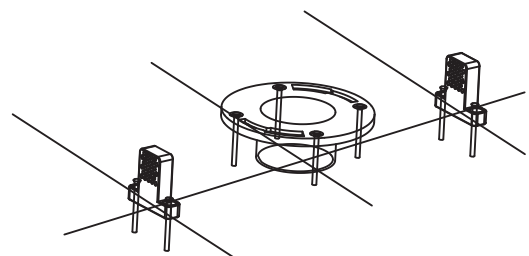


## 4 Install the ceramic body, water supply hose and water filter


1. Place the wax ring on the drain hole at the bottom of the ceramic.




2. Align the ceramic drain with the drain hole on the ground, and press down to make the wax ring fully contact with the ground.

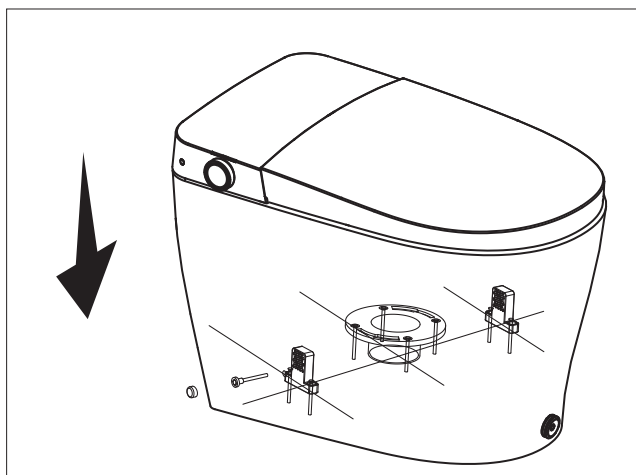


3. Fix the two sides of the ceramic with two bolts, and finally install the cap.

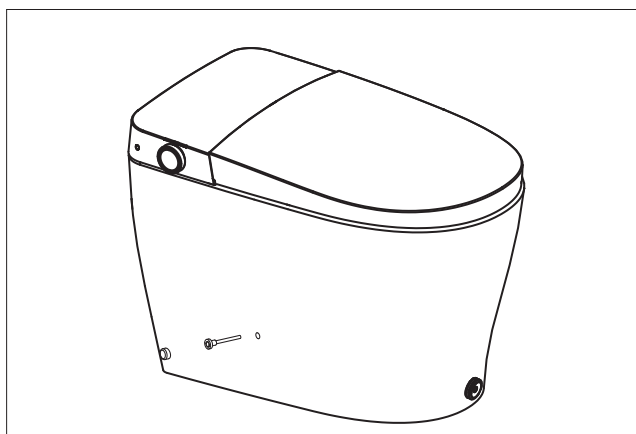


4. Attach the flush water hose to the T-valve and tighten.

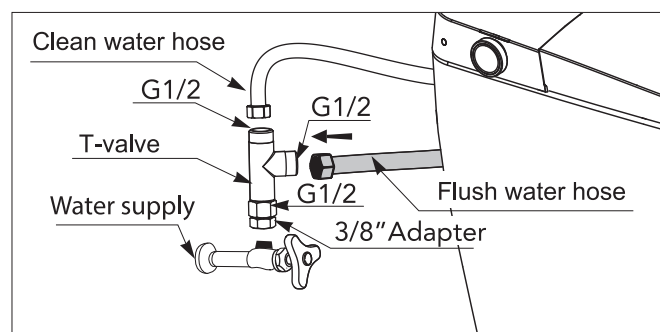

5. Attach the clean water hose to the T-valve and tighten.

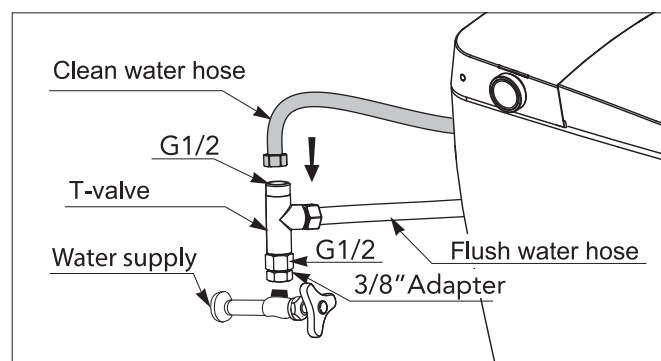

6. Connect the T-valve to the water supply and tighten. Use gasket to prevent water leakage.

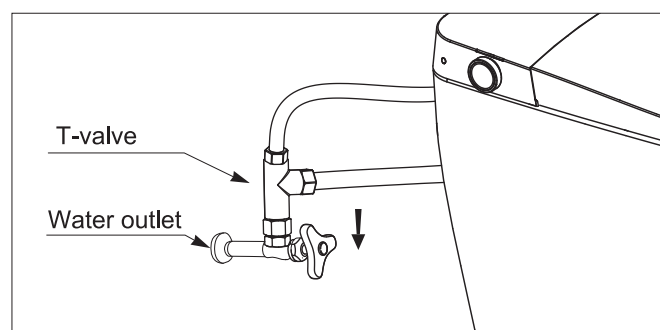


7. Finish installation.

## 5 Installing the remote

1. Drill two 6mm(0.24 inch) diameter holes on the wall (about 1.77 in deep)
2. Knock the anchors into the hole with a hammer.
3. Secure the holder with anchors.
4. Use the screws to secure the holder to the wall.
5. Remove the battery cover from the backside of the remote to install batteries
6. Once finished, remote is ready to be placed in its holder.

Detailed steps shown in the diagram below:

- ※ Please use proper mounting tools for special wall surfaces (such as wood, HDF, etc.)
- ※ The remote control holder should be installed away from the bidet's spray trajectory.
- ※ The remote control holder should be installed within reach when seated on unit.
- ※ Make sure there is nothing to block the transmission between the toilet and its remote.

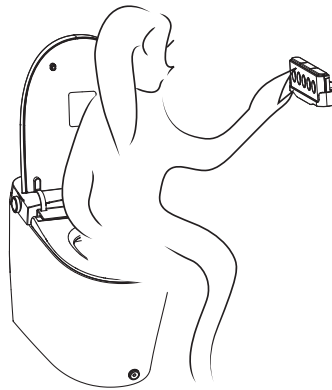

### Steps:

