

Features

- Sweep® spray is a wide, powerful blade of water that sweeps your dishes and sink clean.
- DockNetik®, a magnetic docking system located within the spout, smoothly glides and securely locks the sprayhead into place.
- ProMotion® technology allows the pull-down sprayhead to swivel for more comfortable use.
- MasterClean™ sprayface withstands mineral buildup to wipe clean easily without cleaning products.
- High-arch swing spout offers vertical clearance for tall cookware and pitchers.
- Two lever handles offer separate control of hot and cold water.
- Two-function pull-down sprayhead with touch-control allows you to switch from stream to Sweep® spray.
- KOHLER® ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.

Material

- Premium metal construction.
- KOHLER finishes with ScratchShield® technology withstand even the toughest daily use.

Installation

- 1.5 gpm (5.7 l/m) maximum flow rate at 60 psi (4.1 bar).
- Box includes: Assembled faucet, supply lines, escutcheon plate, soap/lotion dispenser.
- Installs with 1-, 2-, 3-, or 4-hole sinks.
- Flexible supply lines and quick-connect fittings make installation easy.
- Longer shank works with countertops up to 2-1/2" thick and is easy to install.



ADA

CSA B651

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1




CSA B651


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	VS	Vibrant® Stainless
	2BZ	Oil-Rubbed Bronze

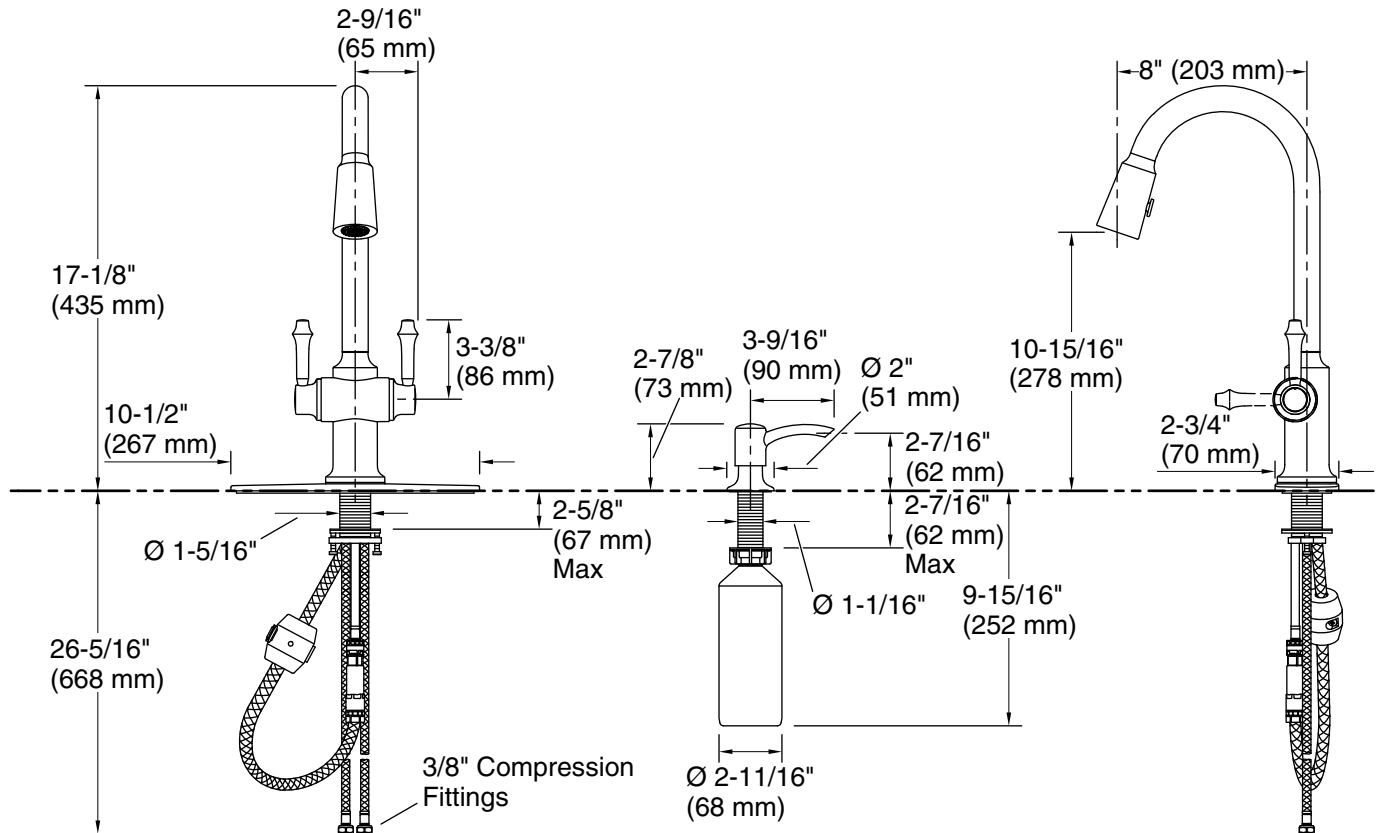

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)
Pressure: 60 psi (4.1 bar)

Notes

Install this product according to the installation instructions.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.