



Tub4Two Soaking Massage Walk In Bathtub



O2SA3060-L



O2SA3060-R

Actual Size: 31.75" W x 60" L x 42" H
Shipping Size: 34" W x 64" L x 50" H
Shipping Weight: 380lbs.
Net Weight: 240lbs.
Water Capacity: 90 gal. US (unoccupied)
55-75 gal. US (occupied)
Approx. Drain Time: +/- 2 minutes (unoccupied bathtub)
at ideal home plumbing conditions
Approx. Fill Time: +/- 14 minutes (unoccupied bathtub)
based on in-house water pressure

Options:

- Left or Right Hinged Door

Included Features:

1. Acrylic Tub Shell:
 - High quality cast acrylic
 - Excellent color uniformity
 - Gloss White Finish
 - Fiberglass Reinforced
2. Low threshold step in 5.5"
3. Stainless Steel Frame with Adjustable Leveling Legs
4. Seat: 19.25" W x 17" H
5. Two (2) front and one (1) end removable access panels
6. Five-Piece Ella Faucet Brass Set with Chrome Finish
 - Thermostatic control valve
 - Designer spout
 - Two (2) 2-way diverters with handles
 - Pull out, hand held, chrome plated shower with 5 ft. retractable stainless steel braided hose

Plumbing:

- Two (2) x 5' long stainless steel braided water supply lines with 3/4" IPS connectors
- Two (2) x 2" floor drains with 2 overflows extension handles
- Two (2) PVC 2" drain elbows with 2" opening

Electrical:

Electrical requirement is one dedicated 120 V electrical line with a 20AMP GFCI standard three prong outlet

Warranty:

- Lifetime limited warranty on acrylic walk in tub shell, frame, and door.
- 5 Year parts warranty*
- Thermostatic Control Valve (TCV) 1 year limited warranty

Tub4Two Soaking Massage Walk In Bathtub

Removable
Access Panel



Front
Access Panel

Textured Floor

Door Handle

Two 2" Drains




Pull Out
Hand Shower

Spout

Thermostatic
Control Valve

Diverter

Tub4Two Soaking Massage Walk In Bathtub

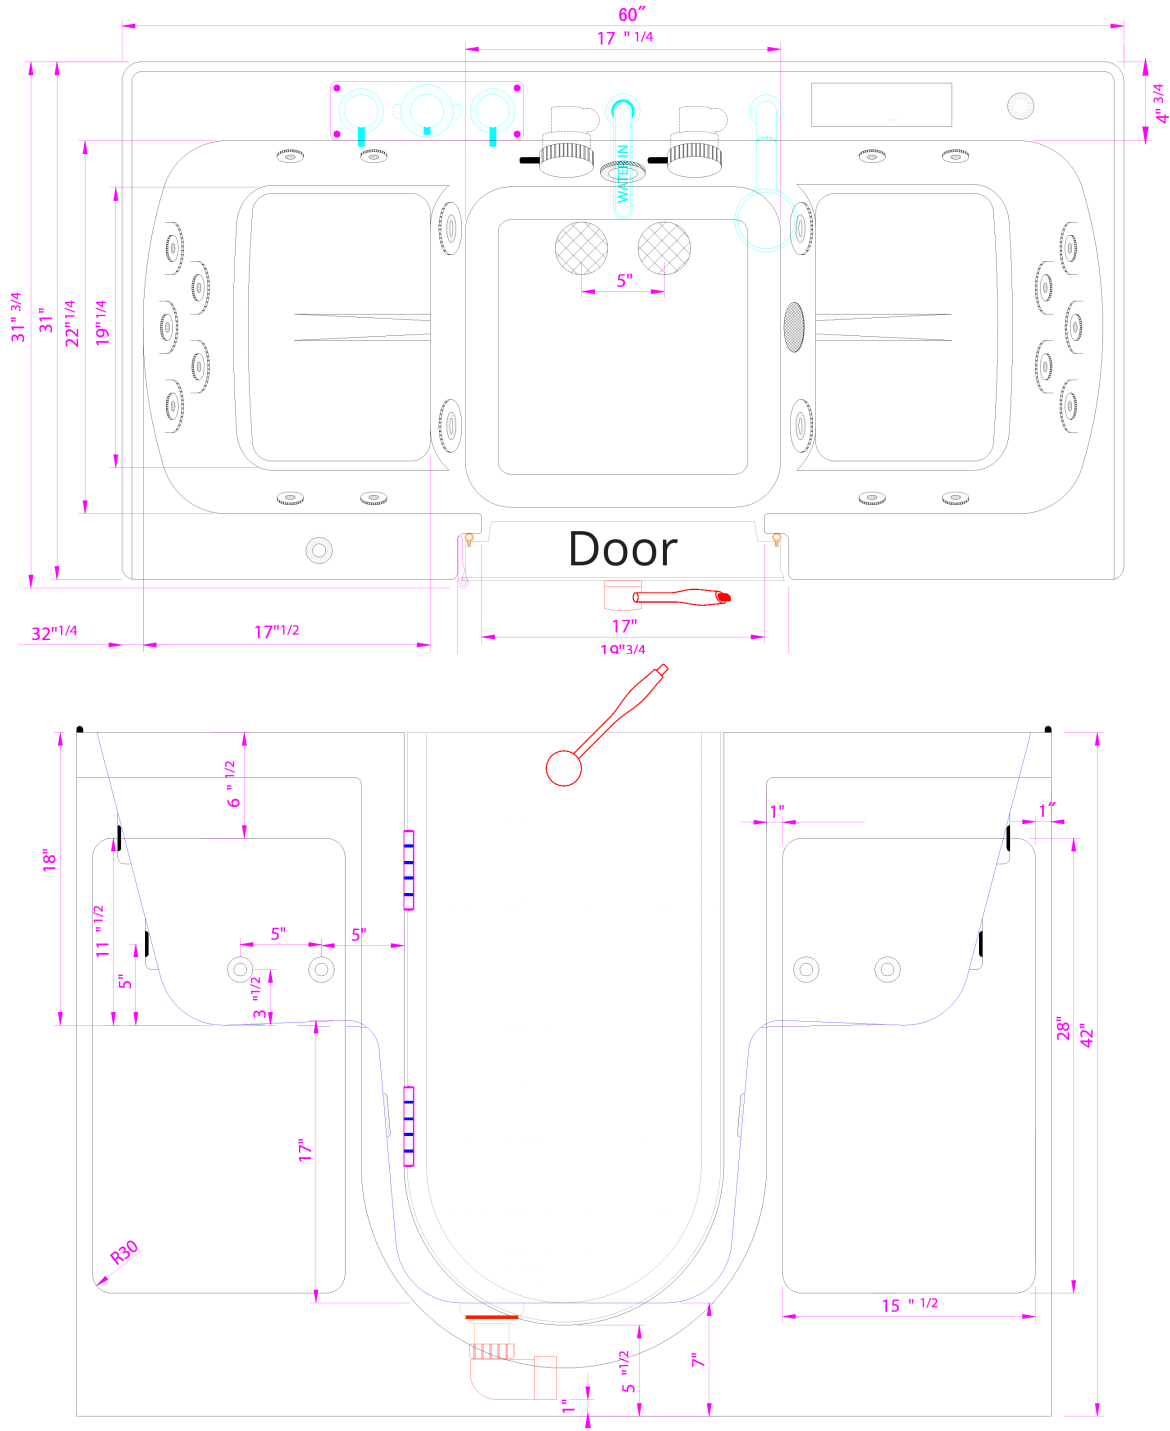

Disclaimer:

In an effort to continually improve our product, specifications and configurations are subject to change without notice. Before ordering or installing, consider future access to essential equipment.