

CORALAIS_®

Features

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit setting for added safety
- Flexible supplies
- Available with an 8-1/2" (21.6 cm) or 10" (25.4 cm) swing spout reach
- Lower flow aerator options are available (refer to the Kohler Price Book)
- 2.2 gallons (8.3 L) per minute maximum flow rate


Codes/Standards Applicable

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.18.1/CSA B125.1
- NSF 61
- Energy Policy Act of 1992
- All applicable US Federal and State material regulations

KITCHEN SINK FAUCET K-15171

ADA CSA B651 OBC



Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Lev	rer Handle ADA CSA B651 OBC	L	DOOP Handle ADA CSA B651 OBC
K-15171-F	Kitchen sink faucet – 8-1/2" (21.6 cm) spout reach	☐ CP	☐ Other		
K-15171-FL	Kitchen sink faucet – 10" (25.4 cm) spout reach			□ CP	☐ Other
K-15171-XF	Kitchen sink faucet – 8-1/2" (21.6 cm) spout reach with red/blue indexing	□СР	□ Other		

Product Specification

The single-control kitchen sink faucet shall be of metal construction. Product shall have a maximum flow rate of 2.2 gallons (8.3 L) per minute with lower flow aerator options available (refer to the Kohler Price Book). Product shall feature a one-piece, self-contained ceramic disc valve, which allows both volume and temperature control. Product shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Product shall feature flexible supplies. Product shall be available with an 8-1/2" (21.6 cm) or 10" (25.4 cm) spout reach. Faucet shall be Kohler Model K-15171-____-____.


CORALAIS®

Optional Accessories				9
K-15179-A	12" (30.5 cm) swing spout and aerator	☐ CP	□ Other	
1160594	Large Spray 0.35 gpm (1.32 lpm) - Insert only			□NA
	Additional flow options are available (refer to the Price Book)			□NA

Installation Notes

Install this product according to the installation guide.

ADA, CSA B651, OBC compliant when installed to the specific requirements of these regulations.

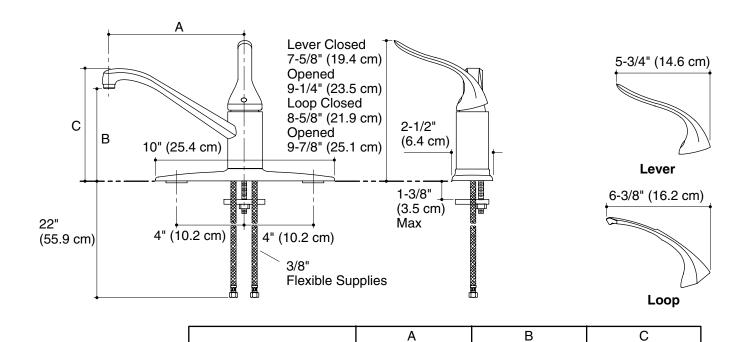

Product Diagram

K-15171-F, K-15171-XF

K-15171-FL

8-1/2" (21.6 cm)

10" (25.4 cm)

5-1/8" (13 cm)

6-1/4" (15.9 cm)



6-1/4" (15.9 cm)

7-1/4" (18.4 cm)