
## Installation

## 1 Cleaning the air hose

- $\hfill\Box$  A 3/8 in. air hose is required, with a maximum length of 25 ft.
- Clean the air hose of accumulated dust and moisture before connecting it to the air supply.




**NOTE:** If a longer air hose is required, connect a 1/2 in. air hose to the 3/8 in. air hose to ensure the air saw has the necessary air supply.

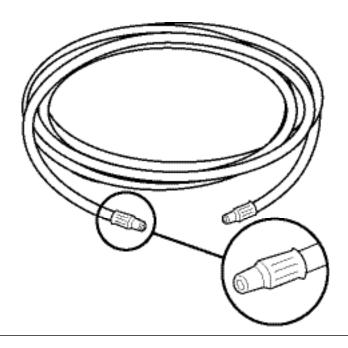

## **2** Connecting to the air supply

- Always use clean dry air. Excessive moisture and dirt will greatly reduce the life of any air motor. We recommend the installation of an in-line filter-regulator-lubricator as close to the tool as possible.
- □ Ensure all hoses and fittings are the correct size and secured tightly.

Recommended Air Line Set-Up	
Ref.	Description
1	Impact Wrench
2	Quick Plug
3	Quick Coupler
4	Air Hose
5	In-line Regulator
6	In-line Lubricator
7	In-line Filter
8	Air Compressor

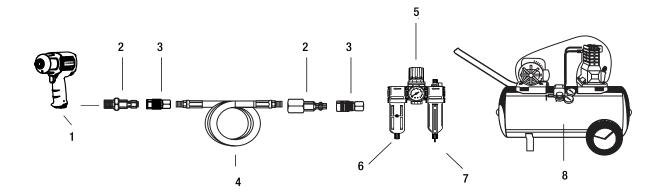

5

HUSKYTOOLS.COM