



**Elmbrook™**

Frameless sliding shower door  
**K-706852-8L**

### Features

- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Dual-sliding barn door style.
- Cushioned center guide provides smooth, quiet sliding action.
- Smooth, easy-to-clean wall jambs.
- 16-1/4" vertical handles.

### Material

- Frameless, 5/16" (8 mm) thick Crystal Clear tempered glass door.
- Anodized aluminum hardware prevents rusting or corrosion.

### Technology


- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.

### Installation

- Fits opening widths 44-5/8" – 47-5/8" (1133 mm – 1210 mm).
- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed.
- 3/8" (9.5 mm) out-of-plumb adjustability per side allows for simpler installation.
- For residential use only.
- Not for use in hospitality.

### Included Components

Additional Components:  
Hardware kit

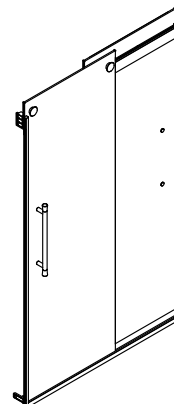

### Codes/Standards

ANSI Z97.1  
CPSC 16CFR 1201

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	SHP	
--	-----	--


	BL	
--	----	--

	BNK	
--	-----	--

### Available Glass Options

Code	Description
------	-------------

L	Crystal Clear
---	---------------

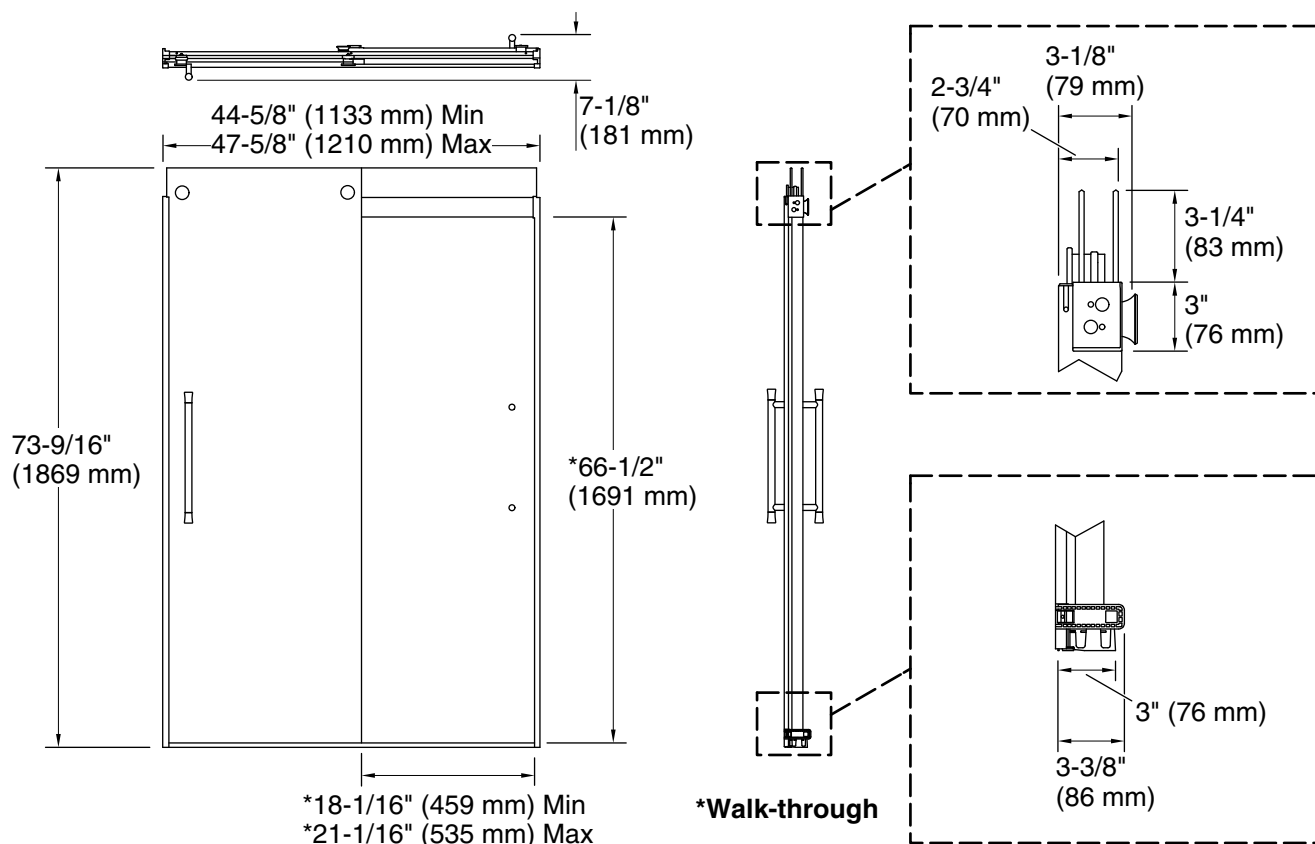

### Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - Min: 44-5/8" (1133 mm)

Opening Width - Max: 47-5/8" (1210 mm)

Walk-through - Min: 18-1/16" (459 mm)

Walk-through - Max: 21-1/16" (535 mm)

Glass thickness: 5/16" (8 mm)

Glass coating: CleanCoat®

### Notes

Install this product according to the installation instructions.

If replacing a shower door, the narrow wall jamb design of this door may not cover the existing shower door holes.

The vertical opening should be a minimum of 76-1/2" (1943 mm) to allow for installation clearance.