


INSTALLATION INSTRUCTION FOR H-MT016G7



1.The confirmation of the installation environment, The measurement distance is 300mm or greater

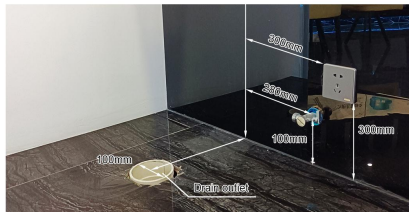

The confirmation of the installation environment



2.Put the flange ring into the drain outlet and mark the screws positions



3.Take off the flange ring and drill four holes for screws



4.Put the screws into the holes



5.Put the flange ring into the drain outlet and install it



6.Install two long screws as below picture



7.Raise the toilet seat.



8.Take off the whole toilet seat and unscrew the flexible tube and black wire



9.Turn over the toilet bowl and install the flange ring as below picture



10.Apply some glass glue on the bottom of the toilet (The glass adhesive in the picture needs to be purchased by oneself.)



11.Move the toilet to the location where it will be installed



12.Make sure two holes in the bottom of the toilet align with the two long screws in the flange ring,then install it




13.Put the toilet seat in the toilet and reconnecting the flexible tube and black wire



14.Press the cover down slightly harder



15.Apply some glass glue to fix the toilet and insulate the outside dirt from entering. (The glass adhesive in the picture needs to be purchased by oneself.)

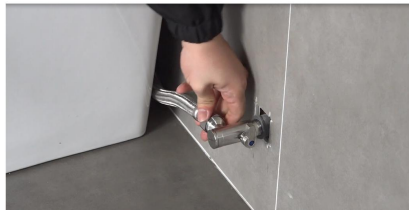

16.Finally connecting the flexible tube to the inlet angle valve

Attention: The above installation steps are universal for all models of toilets and are only for your reference during installation. If you find that the details in the pictures do not match the actual product, please ignore them!