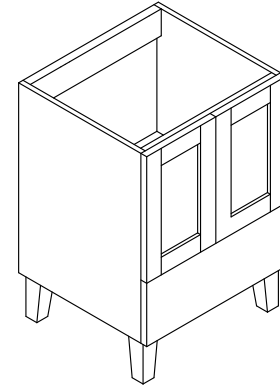# KOHLER®

Poplin™
Vanity
K-99527-LG

Features
- Catalyzed conversion varnish provides a durable moisture-resistant finish.
- Frameless construction with full-overlay doors and drawers.
- Two doors and one drawer.
- Three-way adjustable slow-close door hinges with 110-degree opening capability for easy cabinet access.
- Optional adjustable shelf / drawer organizer (sold separately).
- Coordinates with other products in the Poplin™ collection.
- Full-extension 18" depth drawers with slow-close under-mount slides for smooth opening.
- Solid wood drawers with dovetail construction.
- Door and drawer pulls are sold separately.

Material
- Solid wood and veneers.

For complete listing of available colors, go to kohler.com.
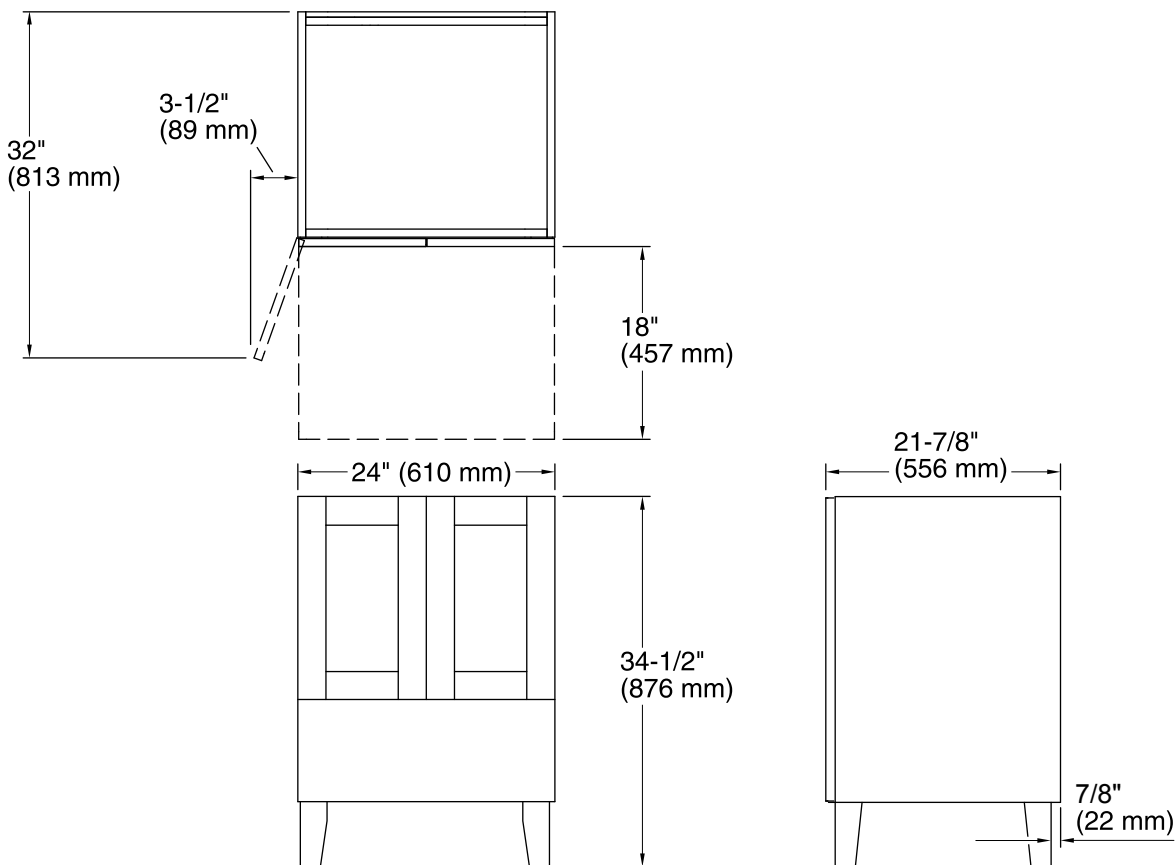
Codes/Standards
CARB P2

KOHLER® One-Year Limited Warranty
See website for detailed warranty information.

Product Specification
Vanity shall be 24" (610 mm) in width, 21-7/8" (556 mm) in depth, and 34-1/2" (876 mm) in height. Vanity shall be made of solid wood and veneers. Vanity shall be catalyzed conversion varnish finish. Vanity shall be frameless construction with full-overlay doors and drawers. Vanity shall be with two doors and one drawer. Vanity shall be with three-way adjustable slow-close door hinges with 110° opening capability. Vanity shall be with full-extension 18" (457 mm) depth drawers with slow-close, under-mount slides. Vanity shall be with solid wood drawers with dovetail construction. Vanity shall be KOHLER Model K-99527-LG.

USA/Canada: 1-800-4KOHLER (1-800-456-4537)
www.kohler.com
12-10-2013 09:09

THE BOLD LOOK
OF **KOHLER®**

3-1/2"
(89 mm)

32"
(813 mm)

18"
(457 mm)

24" (610 mm)

34-1/2"
(876 mm)

21-7/8"
(556 mm)

7/8"
(22 mm)

Technical Information

All measurements are approximate only.
Vanity type: Standard

Installation Notes

Install this product according to the installation guide.

Decorative cabinet hardware is not supplied. Refer to the KOHLER bath accessories line for recommended cabinet hardware to complement your vanity.

Select the type of fastener based upon the wall material. Two 250 lb (113.4 kg) minimum load bearing fasteners are recommended.