

Pull-down Kitchen Sink Faucet K-R776-SD

Features

- One-piece, self-contained ceramic disc valve allows both volume and temperature control.
- Two-function sprayhead with touch control: Sweep™ spray and aerated stream settings.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- ProMotion® technology's light, quiet braided hose and swiveling ball joint make the pull-down sprayhead easier and more comfortable to use.
- Includes 10-1/2" (267 mm) escutcheon plate and refillable 16 fluid ounce (473 ml) soap dispenser.
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar).
- DockNetik® magnetic docking system securely locks the sprayhead into place when not in use.

Material

- Premium metal construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

Installation

- Left- or right- handle installation and 360° spout rotation.
- Includes flexible connections for easy installation.
- For one-, two-, three-, or four-hole installation.

Recommended Products/Accessories

K-23723 Faucet cleaner

ADA CSA B651

Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

VS Vibrant® Stainless



KOHLER, Faucets

Barossa® Pull-down Kitchen Sink Faucet K-R776-SD

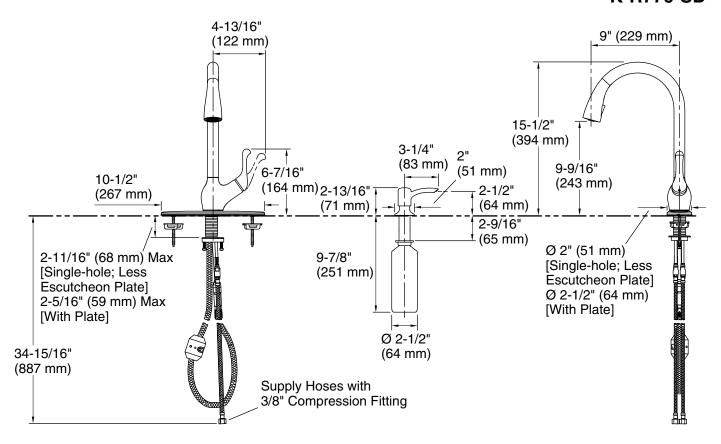

Technical Information

All product dimensions are nominal.

Spout:

Spout reach: 9" (229 mm)

Notes

Install this product according to the installation guide.

ADA complaint for faucet handles only. ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

