

Ashan™

Single-handle bathroom sink faucet K-R27136-4D

Features

- Single-lever handle is simple to use and makes adjusting water temperature easy.
- One piece, self-contained ceramic disc valve allows both volume and temperature control.
- KOHLER[®] ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar).
- Box includes: Assembled faucet, supply lines, escutcheon plate, clicker drain.

Material

- Premium material construction for durability and reliability.
- KOHLER finishes featuring ScratchShield[®] technology withstand even the toughest daily use.

Installation

- For single-hole or 4" (102 mm) centers.
- Simplified faucet assembly; mounting hardware requires no special tools.

Water Conservation & Rebates


• This product can help a building earn Water Efficiency points in LEED[®] Green Building Rating System.

Recommended Products/Accessories

K-23726 Drain treatment K-23723 Faucet cleaner

Included Components

Additional Components: Clicker drain Escutcheon plate Supply lines





Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


CP
BN
BL

- CP Polished Chrome
- BN Vibrant® Brushed Nickel
- BL Matte Black

KOHLER. Faucets

Ashan[™] Single-handle bathroom sink faucet

K-R27136-4D

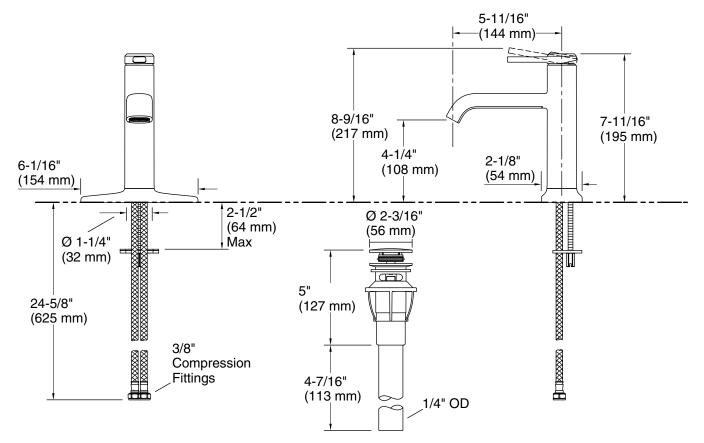

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate:	1.2 gal/min (4.5 l/min)
Pressure:	60 psi (4.1 bar)

Yes

Yes

Drain included:

Drain with overflow:

Spout:

Spout reach:

4-15/16" (125 mm)

Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

