

HOURGLASS_® 32

K-1219

Features

- Acrylic
- Textured bottom surface
- Available for drop-in installation [K-1219]
- Available for three-side alcove installation with integral tile flange [K-1219-L, K-1219-R]
- Optional K-1278 removable apron
- 60" (152.4 cm) x 32" (81.3 cm) x 20" (50.8 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- IAPMO/UPC
- CSA International
- CSA B45.0
- CSA B45.5



Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	Description	Colors/F	Colors/Finishes	
K-1219	Drop-in rim style	□ 0	☐ Other	
K-1219-L	Integral tile flange, left drain	□ 0	☐ Other	
K-1219-R	Integral tile flange, right drain	0	☐ Other	
Recomme	nded Accessories			
K-7161-AF	Bath drain – above or through-the-floor installation	□ CP □	PB ☐ Other	

Optional Accessories					
K-1278	Removable apron	□ 0	□ Other		
K-1181	132" (335.3 cm) vinyl tiling-in bead			□ NA	

Product Specification

The acrylic bath shall be 60" (152.4 cm) in length, 32" (81.3 cm) in width, and 20" (50.8 cm) in height. Bath shall have a textured bottom surface. Bath shall be available for drop-in installation [K-1219] or three-side alcove installation with integral tile flange [K-1219-L, K-1219-R]. Bath shall have an optional K-1278 removable apron available. Bath shall be Kohler Model K-1219- or K-1219-....

USA: 1-800-4-KOHLER Canada: 1-800-964-5590 kohler.com

HOURGLASS_® 32

Technical Information


Fixture*:					
Basin area					
Basin area bottom	47" (119.4 cm) x 20" (50.8 cm)				
Basin area top	53" (134.6 cm) x 23" (58.4 cm)				
Weight	80 lbs (36.3 kg)				
To overflow					
Water depth	14-1/2" (36.8 cm)				
Capacity	64 gal (242.3 L)				
* Approximate measurements for comparison only.					

Installation Notes

Install this product according to the installation guide.

Floor support under this product must provide for a minimum of 48 lbs/square foot (234 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

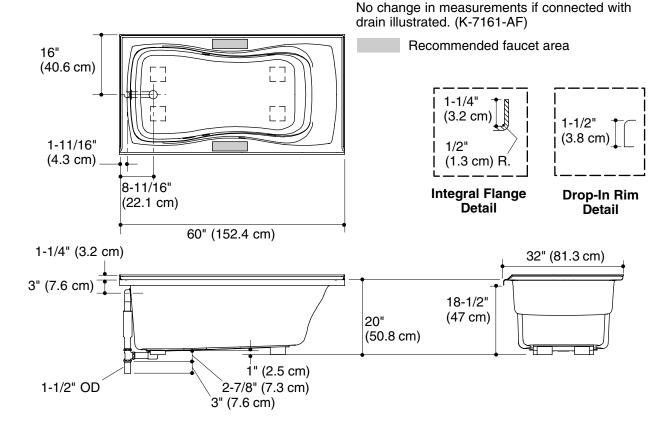

Product Diagram

