

# Trielle® Pull-Down Kitchen Sink Faucet K-R18594-SD

#### **Features**

- Single lever handle is simple to use and makes adjusting water temperature easy.
- High-arch swivel spout and 360° spout rotation offer superior clearance for filling pots and cleaning.
- Two-function pull-down sprayhead allows you to switch from aerated stream to Sweep® spray.
- DockNetik® magnetic docking system securely locks the sprayhead into place when not in use.
- MasterClean<sup>™</sup> sprayface features an easy-to-clean surface that withstands mineral buildup.
- Includes soap/lotion dispenser.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- Installs with 1-, 2-, 3-, or 4-hole sink (adapter plate included).
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar).

#### Material

- KOHLER finishes resist corrosion and tarnishing.
- Premium material construction for durability and reliability.

## Installation

- Flexible supply lines and quick-connect fittings simplify installation
- Longer shank works with countertops up to 2½" inches thick and is easy to install.

## **Recommended Products/Accessories**

K-23723 Faucet cleaner



ADA CSA B651

#### Codes/Standards

CSA B651

ASME A112.18.1/CSA B125.1
NSF/ANSI 61
NSF/ANSI 372
All applicable US Federal and State material regulations
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1

# **KOHLER® Faucet Lifetime Limited Warranty**

See website for detailed warranty information.

# **Available Colors/Finishes**


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	VS	Vibrant® Stainless
	2BZ	Oil-Rubbed Bronze



# **KOHLER**, Faucets

# Trielle® Pull-Down Kitchen Sink Faucet K-R18594-SD

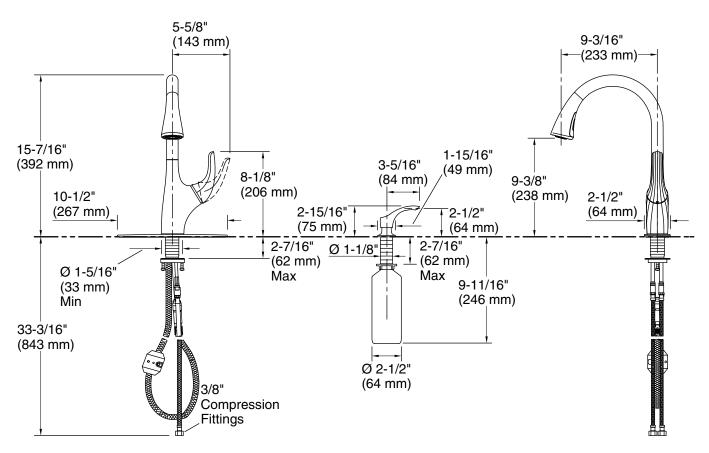

### **Technical Information**

All product dimensions are nominal.

### Spout:

Spout reach: 9-3/16" (234 mm)

#### **Notes**

Install this product according to the installation guide.

ADA complaint for faucet handles only. ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

