

Features


- Single lever handle allows for both volume and temperature control.
- 5.1" (129 mm) spout reach.
- 1.2 gal/min (4.5 l/min) maximum flow rate [max at 60 psi (4.1bar)]
- Includes metal pop-up drain with 1-1/4-inch metal tailpiece.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- Coordinates with Components faucets, accessories, and showering components to complete your bathroom.

Material

- Premium Metal Construction.
- KOHLER® finishes resist corrosion and tarnish.

Installation

- For single-hole installation.
- Pre-attached flexible supply lines simplify installation.

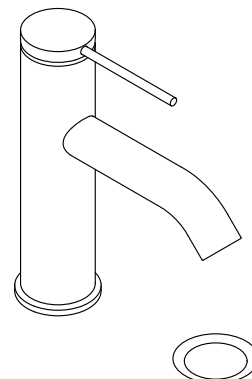

ADA

CSA B651

OBC

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA


ICC/ANSI A117.1

CSA B651

OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

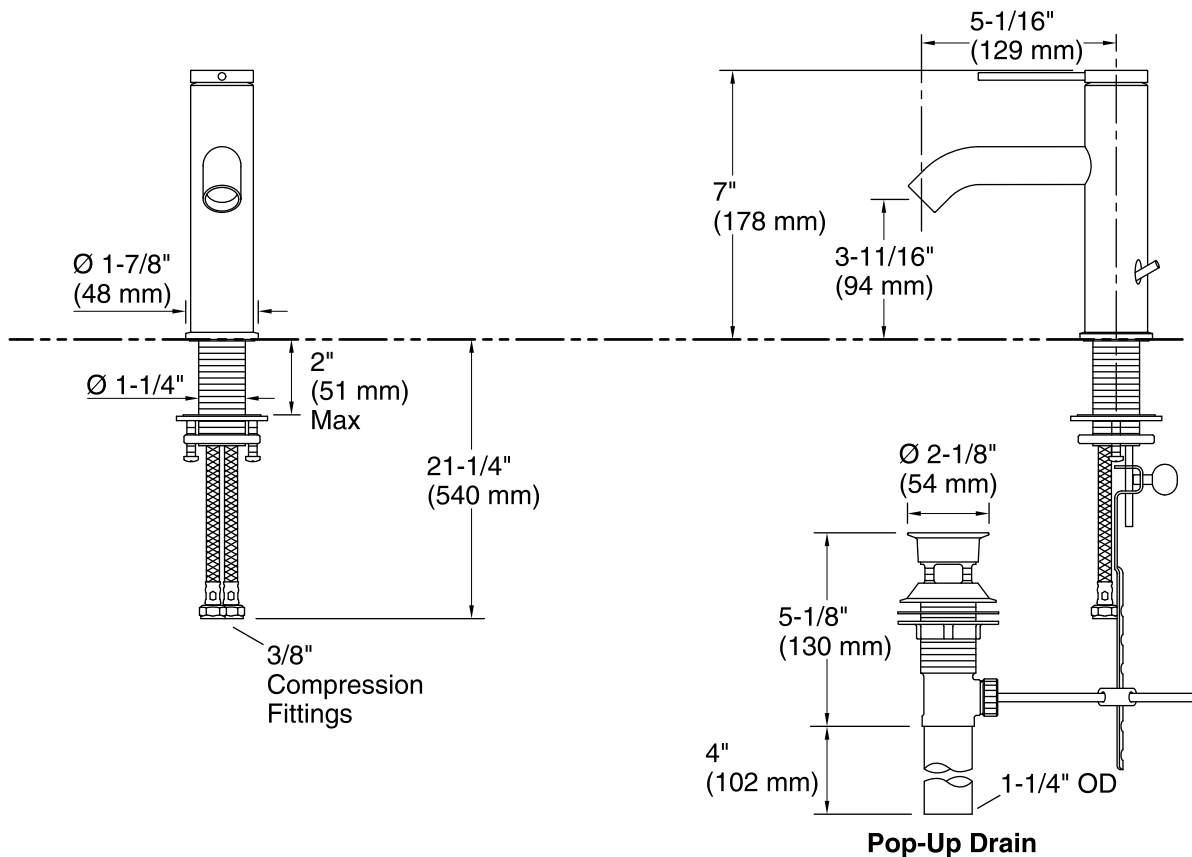

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Spout:

Spout reach: 5-1/16" (129 mm)

Handle clearance: 3-9/16" (91 mm)

Notes

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.