


HOROW

Two Piece Toilet

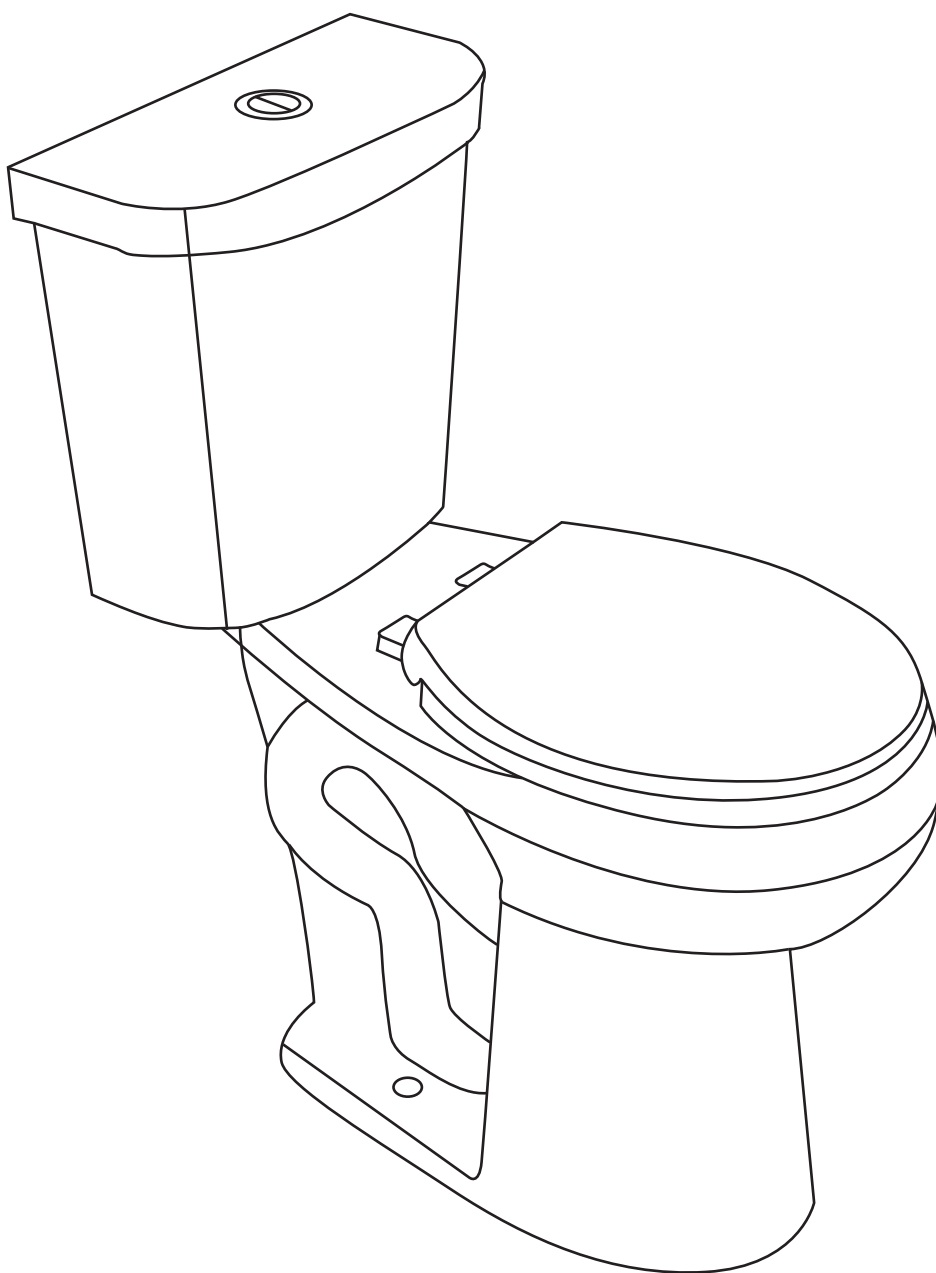

The appearance is for reference only,
please refer to the actual product received.

**READ ALL INSTRUCTIONS BEFORE UNPACKING THE PRODUCT**

INSTRUCTIONS THAT, IF IGNORED COULD RESULT IN DEATH OR SERIOUS INJURY CAUSED BY INCORRECT HANDLING OR INSTALLATION OF THE PRODUCT. THESE INSTRUCTIONS MUST BE OBSERVED FOR SAFE INSTALLATION.

CAUTION!**TWO PERSON
LIFT REQUIRED****2 PEOPLE ARE REQUIRED TO LIFT AND DURING
ENTIRE INSTALLATION OF THIS PRODUCT**

INSTALLATION OF THIS PRODUCTS BY AN
INEXPERIENCED INSTALLER MAY RESULT
PERSONAL INJURY OR DEATH!



We reserve the right to change, update, modify, alter, or redesign this manual/product or its policies without prior notice! It is your responsibility to visit the website to download or contact customer service for the most updated version of the installation instructions. We shall not be liable for any injuries or property damages in connection with this product during installation or use of this product!

This product must be installed by a fully insured and licensed plumber only. Anyone other than a fully insured and licensed plumber who installs any of our products shall void the limited warranty. We recommend that such licensed plumbers have experience in the installation of products.

The limited warranty is void for any commercial installation.

We are not responsible for local code compliance for this product. Building and plumbing codes may vary from state to state by location. We are not responsible for providing any compliance certifications.

We are not responsible for providing any type of certification for this product.


Under no circumstances we are shall not be liable for any incidental damages sustained in connection with this product Neither manufacturer, distributor, nor retailer is responsible for water damage or flood caused due to the use of this product.

Under no circumstances we shall not be liable for any fees, cost of installation/reinstallation/removal, subsequent damage or transportation in case of the product defect.









PRIOR TO INSTALLATION:

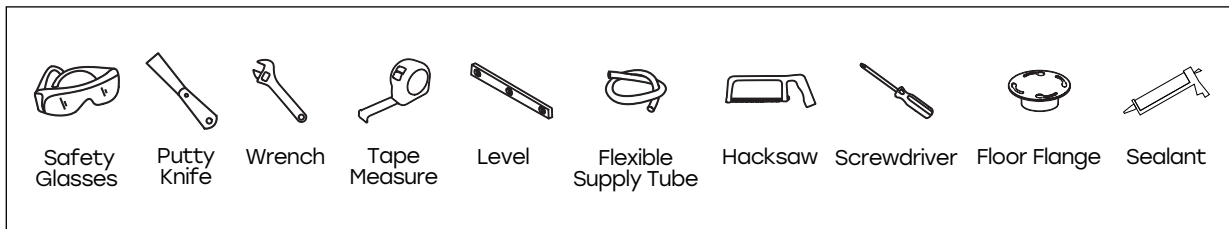- + Inspect the toilet to ensure no damages have occurred while in shipping.
- + Observe all plumbing and building codes in accordance with your state and local requirements.
- + All dimensions are nominal! Be sure to measure your toilet prior to installation.
- + The step-by-step guidelines in the installation instructions are a general reference. Should there be any discrepancies HOROW cannot be held liable. It is recommended to install all HOROW products by hiring a licensed professional.
- + Read installation and maintenance instructions thoroughly before installing. Be sure to use proper tools and always wear proper personal safety accessories for your protection.
- + Two people are recommended to handle and install this product as it is fragile.

SUGGESTED TOOLS AND MATERIALS:



INCLUDED PARTS:

A Tank with cover	x1			
B Flush button	x1			
C Complete Flush Valve	x1			
D Toilet bowl	x1			
E Toilet seat with installation kit	x1			
F Complete Fill Valve with Float and 1/2 inch adapter	x1			
G Installation Parts (Ground Mounting Bolt Kit, Toilet Bowl and Water Tank Connection Kit.)	x1			
H Wax Sealing Ring	x1			

NOTE: General instruction manual. For some parts, please refer to the actual product you receive.

If you have any questions or concerns
Please contact us: (+1)209-200-8033 or support@horow.com

REMOVE OLD TOILET

- Shut off water supply line. If you do not have shut-off valve near the toilet shut off main water supply line.
- Flush the old toilet and make sure that tank is empty.
- Disconnect and remove water supply line connected to the toilet's tank.
- Remove old toilet, bolts and nuts from the closet flange.
- Clean closet flange area from old wax ring and putty sealant using putty knife for the base area.
- Clean any remaining debris and wipe any water at the installation area.
- Temporarily plug flange on a floor with a flange plug or towel to prevent gasses from escaping.

GETTING STARTED

- Ensure that you have gathered all the required materials that are needed for the installation.
- For these instructions, it is assumed that the old toilet has been completely removed and any necessary repairs or modifications to the water supply have been completed.
- Confirm that there is enough floor space to install the toilet unit and that the bathroom door will open/close without obstruction.
- Shut off the water supply lines where the new toilet is being installed.
- Water Pressure: The product is designed to operate with a minimum working pressure of 20psi and maximum of 80psi.

1. PREPARE CLOSET FLANGE

Measure from the wall to the center of the closet flange to ensure a rough-in of 12"

See Figure 1

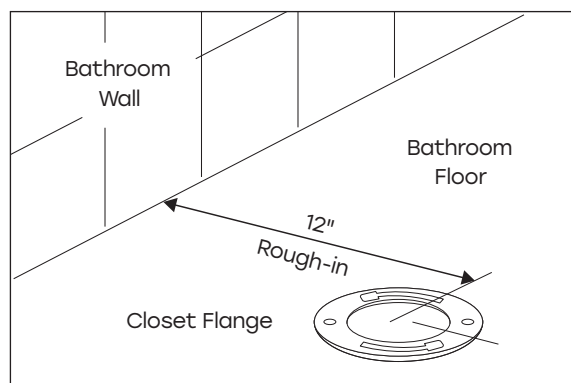


Figure 1

2. INSTALL CLOSET BOLTS

Step 1. Install closet bolts to flange channels, turn 90°.

Step 2. Position them 6" (152mm) apart and parallel to the wall.

See Figure 2


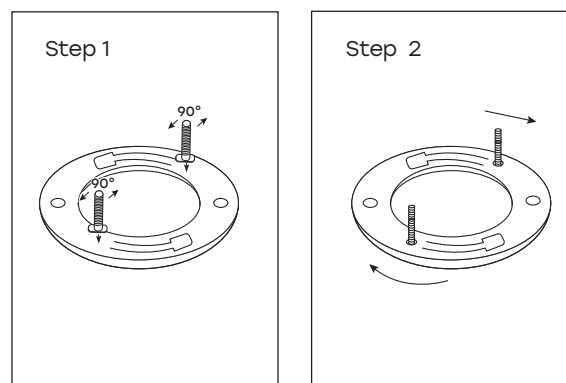


Figure 2

INSTALLATION PROCEDURE

- Make sure the water supply valve is shut off before installation. Remove old closet bolts from closet flange. Clean any old wax, putty, etc. from the base area.

- 1 Install new closet bolts into closet flange. The length of the closet bolts may need to be cut and shortened so that the bolt cap will fit.

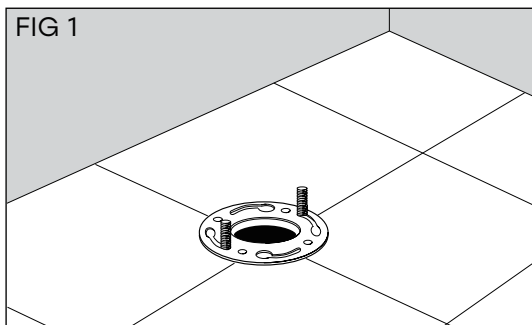


- 2 Turn the toilet upside down onto a soft surface to avoid scratches on the finish and place a new wax ring around the waste flange of the toilet bowl.




- 3 Lower the toilet onto the closet bolts, so the bolts project through mounting holes in the base of the toilet.




- 4 Using a rocking motion, press the bowl down to position the toilet onto the flange. Install plastic cap washers, followed by metal washers and nuts onto the closet bolts. Then install the flange bolt caps. Tighten the bolts alternately until the toilet is firmly seated on the floor.

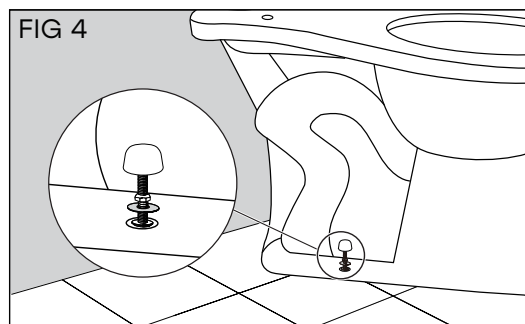

- 5 Insert tank bolts inside the tank. Use the metal and rubber washers supplied to create a seal.

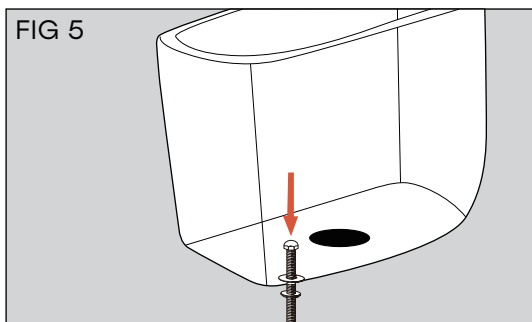

- 6 Attach the large rubber sealing gasket to the center drain hole under the tank. Gently place the tank on the bowl with the bolts protruding out underneath. Then tighten with metal oval washers and wing nuts, and tighten enough that the tank sits flat on the bowl.

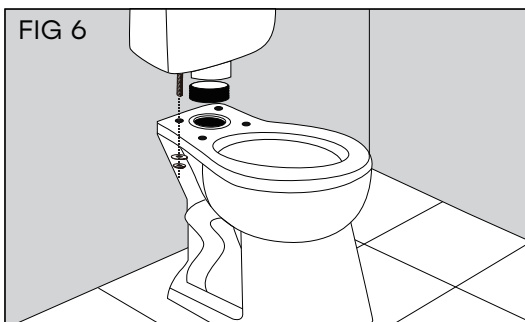


INSTALLATION PROCEDURE

7 Push Button Installation

1. Side Flush


- ① a. Turn clockwise to remove the plastic nut from the lever arm.
- b. Insert the lever arm through the left hole and tighten the plastic nut counterclockwise.
- c. Hook the chain to the lever, and when the lever is stationary, the chain is only long enough for the baffle to close.

FIG 7-1 ①

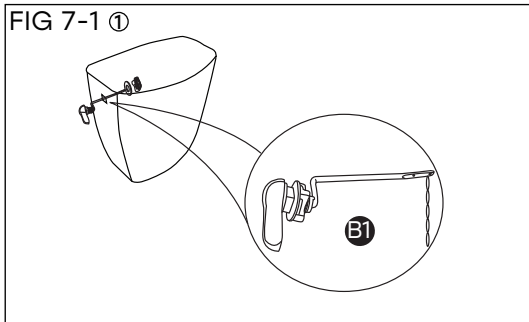

- ② Open the nuts under the water inlet valve and the drainage valve. The drainage valve of the water inlet valve and the drainage valve are placed in the water tank. Screw the nuts to the exposed part of the water inlet valve and the drainage valve under the water tank.


FIG 7-1 ②

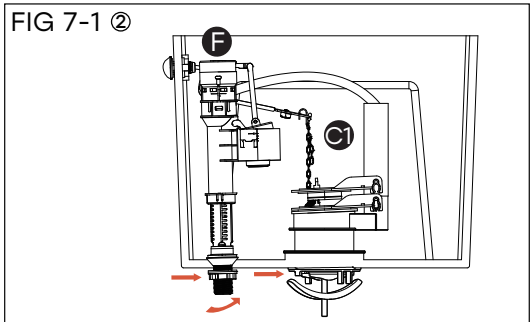

2. Dual Flush


- ① Unscrew the tightening nut which is attached to the push button. Insert the push button. Insert the push button body through the tank lid hole. Screw back the tightening nut under the tank lid.

FIG 7-2 ①

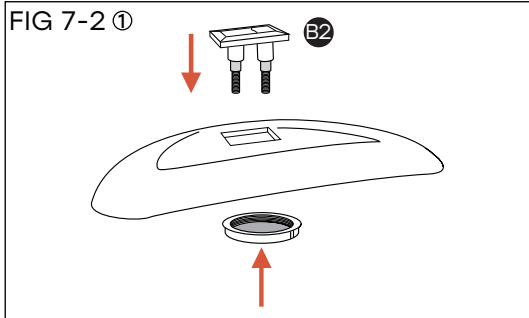


- ② Adjust the threaded rods from the push button so that the rods are slightly touching the flush mechanism when the tank lid is on.

FIG 7-2 ②

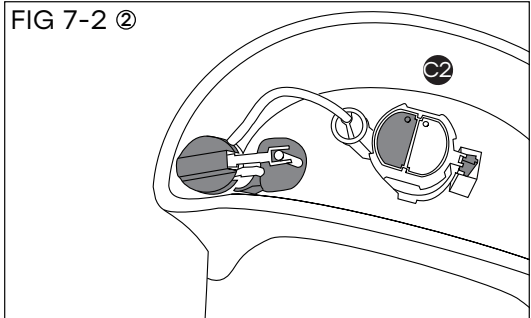


- 8 install the tank cover down on the toilet.

FIG 8

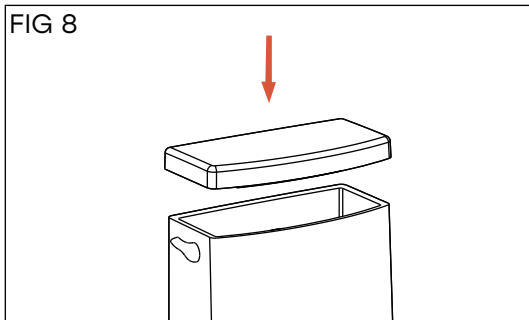


- 9 Use sealant to glue the toilet where it joins the floor.

FIG 9

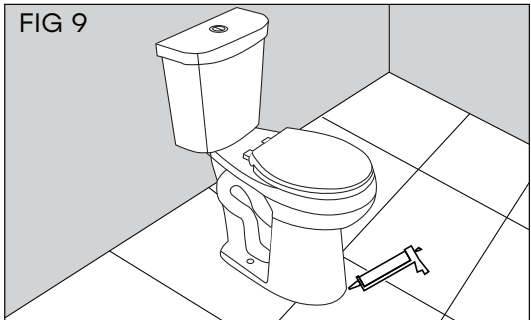


TOILET SEAT REPLACEMENT


1. Place the Toilet Seat on top of the bowl and then insert the provided lock bolts into the holes on the hinges of the toilet seat.

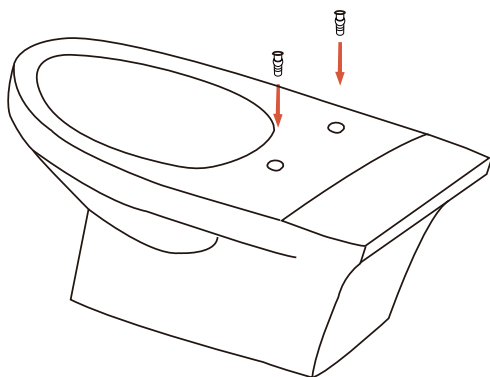


2. Align the Toilet Seat to the top rim of the toilet bowl.

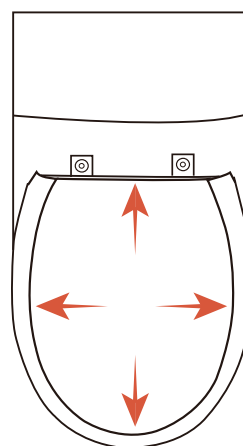

3. Use a screwdriver to firmly tighten the lock bolts down to the bowl.

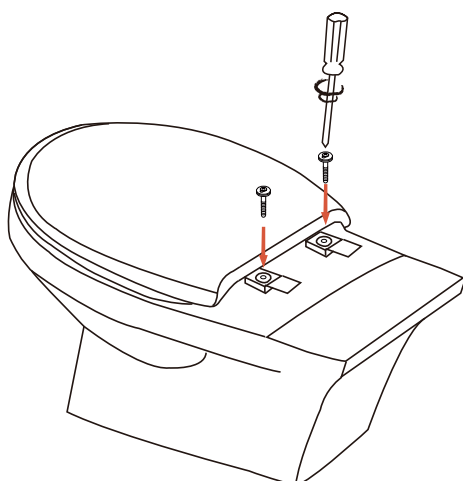

4. Push the decorative caps down to the seat trough.

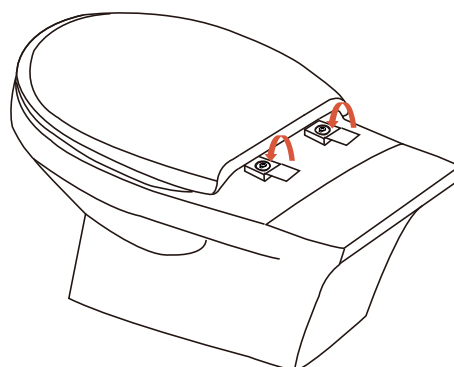

ONE YEAR LIMITED WARRANTY

HOROW products are crafted with high-quality materials and exceptional craftsmanship to ensure durability. If defects in materials or workmanship occur under normal use within the first year of purchase, HOROW will provide replacement parts at no charge or, at its discretion, replace any defective product or part. This warranty is valid only for the original purchaser.

How to Make a Warranty Claim: To make a claim, you will need:

- Proof of purchase (original sales receipt)
- A description and photographs of the defect
- The model number or product description

Please note: HOROW is not responsible for labor costs, removal, or installation expenses.

Installation and Liability

HOROW strongly recommends that a licensed professional plumber perform all installations. HOROW will not be liable for any damage or product failure resulting from improper installation, misuse, or failure to use a licensed professional.

Warranty Exclusions

This warranty will be void if:

- Installation recommendations were not followed
- The product has been moved from its original installation location
- The product has been modified in any way
- The product has been subjected to improper maintenance, abuse, misuse, excessive use of chemicals, accidents, or any other form of damage

Warranty Registration

Proof of purchase is required to validate this limited warranty. HOROW encourages you to register your product upon purchase to create a record of ownership at www.horow.com. Registration is voluntary and not required to maintain your limited warranty rights.



FOR ANY QUESTIONS OR CLAIMS, PLEASE CONTACT US BY PHONE OR EMAIL.

Phone: +1 209 200-8033

Monday to Friday

Email: support@horow.com

When making a claim, please prepare a photo of the evidence of damage so that we can quickly resolve the claim for you.



WARNING

Content may contain sharp and other possibly harmful pieces and may cause hazard to children and adults, HOROW is not responsible in any way for personal damage.