Claro™

KOHLER Faucets

Four-function handshower, 1.75 gpm **K-REC30237-G**

Features

- Multifunction handshower with advanced spray engine provides three experiences: full coverage, powerful massage, and gentle mist, plus pause feature
- Full coverage spray produces an encompassing spray ideal for everyday use
- Powerful massage spray is a focused stream that targets sore muscles, or use as a utility spray to rinse kids, pets, and your shower
- Gentle mist spray restores, with a thick cloud of silky, superfine water droplets
- Pause feature temporarily pauses water flow to conserve water while you lather, shave, or shampoo
- Simple thumb tab smoothly transitions between sprays
- Innovative docking system enables handshower to easily click into place for quick, easy docking and undocking
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup
- 1.75 gpm (6.6 lpm) maximum flow rate at 45 psi (3.1 bar)
- Box includes: Handshower, docking system, 72" (1829 mm) hose

Material

- Select KOHLER finishes feature ScratchShield® technology which withstands even the toughest daily use
- KOHLER finishes resist corrosion and tarnishing

Installation

- 1/2" 14 NPSM connection
- Required for installation: Sealant tape and adjustable wrench

Included Components

Additional Components:

72" Hose Handshower Showerhead





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense™ California Energy Commission (CEC)

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-----------------------------------|
| | CP | Polished Chrome |
| | BL | Matte Black |
| | 2MB | Vibrant® Brushed Moderne Brass |





ClaroTM Four-function handshower, 1.75 gpm K-REC30237-G

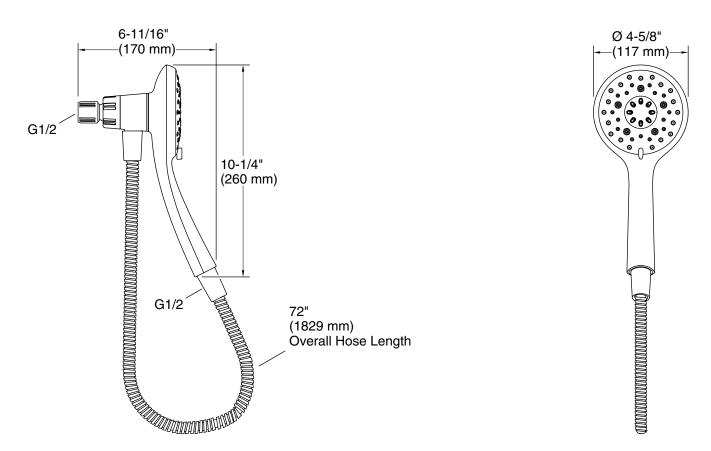

Technical Information

All product dimensions are nominal.

Drain included: No

Handshower:

Rated maximum 1.75 gal/min (6.6 l/min)

flow:

Pressure: 80 psi (5.5 bar)

Notes

Install this product according to the installation instructions.

