

LINEAR HIGH BAY



PRODUCT DESCRIPTION

The High Bay fixture's anti-glare design minimizes the glare, while optimizing the lighting performance and distribution. The multiple light distribution angles allow these fixtures to be used in a wide variety of commercial and industrial applications with an extensive range of mounting heights.

INSTALLATIONS:


1. Hanging installation




2. Boom installation



3. Ceiling mount



4. Rotate installation




DIMENSIONS

110 watts / 165 watts



220 watts

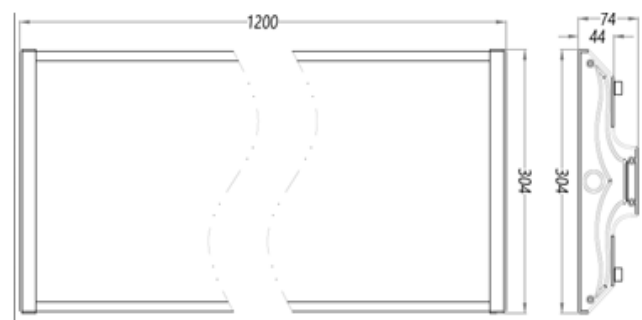

SPECIFICATIONS

Part Number	Input Power	Input Voltage	Efficiency	CCT	Light Distribution	CRI	Certificates	Warranty
JH-LHB110W2-82F	110W	100-277VAC	140Lm/W	4000-5700K	120°	80+	ETL	5 Years
JH-LHB165W2-82F	165W	100-277VAC	140Lm/W	4000-5700K	120°	80+	ETL	5 Years
JH-LHB220W4-82F	220W	100-277VAC	140Lm/W	4000-5700K	120°	80+	ETL	5 Years