

Capilano®

Pull-down single-handle kitchen faucet K-R24214-SD

Features


- Boost technology increases the flow rate by 30% with the press of a button.
- DockNetik® magnetic docking system securely locks the sprayhead into place when not in use.
- ProMotion® technology allows the pull-down sprayhead to swivel for more comfortable use.
- MasterClean[™] sprayface withstands mineral buildup to wipe clean easily without cleaning products.
- High-arch swing spout offers vertical clearance for tall cookware and pitchers.
- Single lever handle makes adjusting water temperature easy.
- KOHLER® ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- 1.5 gpm (5.7 l/m) maximum flow rate at 60 psi (4.1 bar).
- Box includes: Assembled faucet, supply lines, escutcheon plate, soap/lotion dispenser.

Material

- Premium metal contruction.
- KOHLER finishes resist corrosion and tarnishing.
- KOHLER finishes featuring ScratchShield® technology withstand even the toughest daily use.

Installation

- Installs with 1-, 2-, 3- or 4-hole sink.
- Flexible supply lines and quick-connect fittings make installation easy.
- Longer shank works with countertops up to 2-1/2" thick and is easy to install.



ADA

CSA B651

Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	VS	Vibrant® Stainless
	2BZ	Oil-Rubbed Bronze





Capilano®

Pull-down single-handle kitchen faucet K-R24214-SD

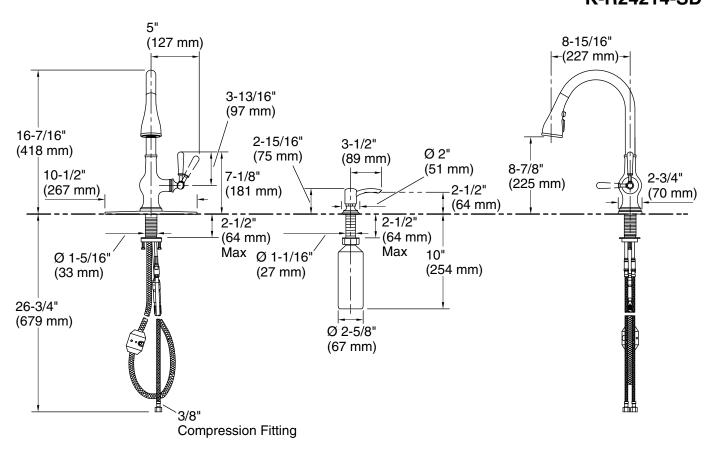

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

Notes

Install this product according to the installation instructions.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

