
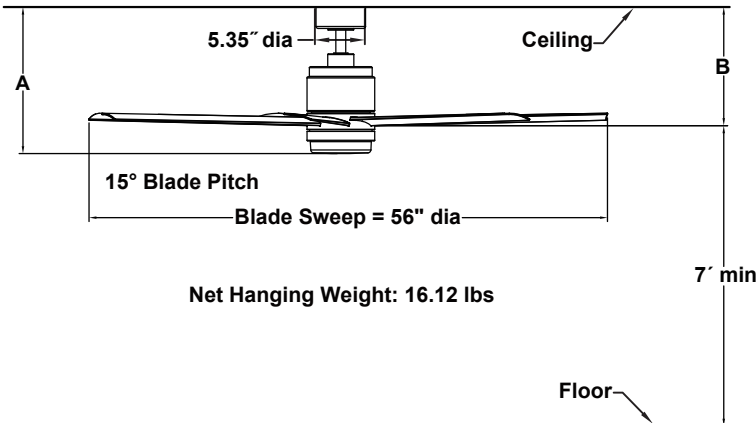


BLITZ™

LP8377**

56" Ceiling Fan

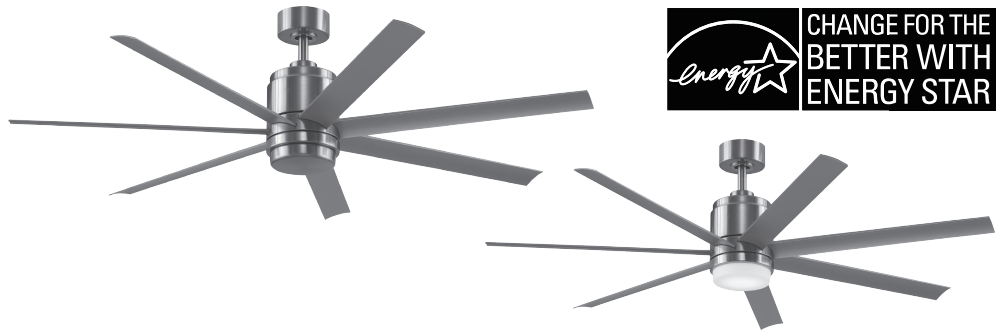

	A	B
Fan w/4.5" downrod	15.44"	12.52"
Fan w/12" downrod	22.94"	20.02"
Fan w/18" downrod	28.94"	26.02"
Fan w/24" downrod	34.94"	32.02"
Fan w/36" downrod	46.94"	44.02"
Fan w/48" downrod	58.94"	56.02"
Fan w/60" downrod	70.94"	68.02"
Fan w/72" downrod	82.94"	80.02"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

100 x 30 DC motor is designed for optimal performance with this fan. Fan is Energy Star Rated.

BLADES:

A set of seven 26" composite blades is included.

CONTROL OPTIONS:

TR305S hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Optional TW306 wall control is available — sold separately. Instructions is provided with each control.

LIGHTING OPTIONS:

One 18-watt CCT LED (Warm/Natural/Cool) included.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 4.5" long downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 12" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room over 400 sq ft.

Available Finishes	
LBN	Brushed Nickel with Gray Blade and Opal Frosted Glass / Steel Cap
LGR	Matte Greige with Weathered Wood Blade and Opal Frosted Glass / Steel Cap
LMW	Matte White with Matte White Blade and Opal Frosted Glass / Steel Cap

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 th)	135	6764	177	0.59	38
Med (9 th)	87	4384	487	0.15	9
Low (1 th)	29	1257	625	0.04	2

Energy Guide FTC			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
23	4808	7	206

Lighting Information (120V)					
Light Bulb	Lumens Amount	Delivered Lumens	Color Temp	CRI	Shade/Glass type
18W CCT LED	1600	773/822/807	Warm/Natural/Cool	90%	Opal Frosted