

WALL MOUNT FAUCET
10142LF/10149LF



The Right Choice...

INSTALLATION INSTRUCTIONS

RECOMMENDED TOOLS



Channel Locks



Adjustable Wrench



Plumbers' Putty or Caulking




Phillips Screwdriver

Turn off the water supply at the main source.

Hand tighten all parts prior to tightening with wrench. Do not force parts together.

Handle plated surfaces with care, being careful not to scratch with tools.

Wall mount faucets have a $\frac{1}{2}$ " I.P.S. female flanged inlet.

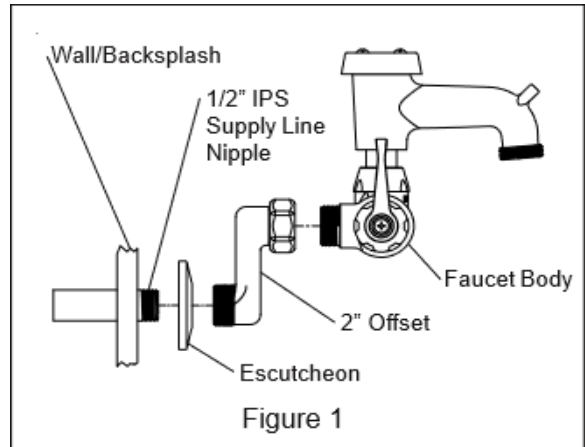

Assemble Faucet to Backsplash

Apply teflon tape or pipe joint compound to supply line nipples.

Place nipples through holes in backsplash.

Assemble each flanged inlet to one nipple, then the other.

Thread flanged inlet loosely against wall or backsplash.

Carefully orient, mount and hand tighten the faucet to the two flanges. Be sure to include the washers provided.

Use wrench to tighten flange against backsplash. (Maintain alignment of faucet or spout to sink while tightening).

Wrench tighten flanges to faucet body.

Make sure drain is attached and turn on water supply - being sure to check for leaks. Wrench tighten where needed.

