


Item:

HT-G2LHB-2FT3L-F8155/277-250D



LED HIGH BAY

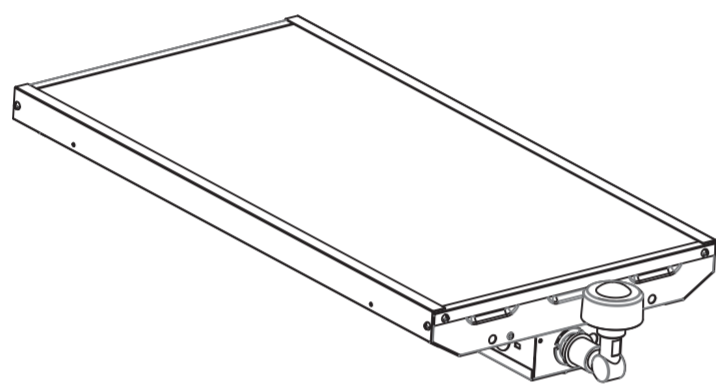

Before returning to your retailer, please contact support@runbisonlighting.com if you have any questions or problem with this product

1

SAFETY INSTRUCTION

WARNING

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION

- Avoid direct eye exposure to the light source while it is on.
 - Account for small parts and destroy packing material, as these may be hazardous to children.
 - Risk of burn. Disconnect power and allow fixture to cool before changing bulb or handling fixture.
- NOTICE: Green ground screw provided in proper location. Do not relocate.
- NOTICE: Minimum 90°C supply conductors.
- NOTICE: Specifications and dimensions subject to change without notice.
- NOTICE: Suitable for Dry or Damp location.

2

INSTALLATION INSTRUCTION

Installation Step:

Always turn off the power supply from main circuit breaker first!

Chain Mounting with V hook

Step1: Clip the brackets to the slots of fixture

Step2: Attach provided V-Hooks to brackets.


Step3: Attach provided chain to the V-hooks and mounting surface.

**NOTE: Purple and grey lead inside the driver compartment are 0-10V (low voltage) dimming leads. Connect to dimming low voltage wiring only.


- Clean all residues/fingerprints from the new LED high bay and lens. Double check all hanging hardware before moving onto the next installation.

With Motion Sensor-Install sensor

1.Remove the sensor base cover.

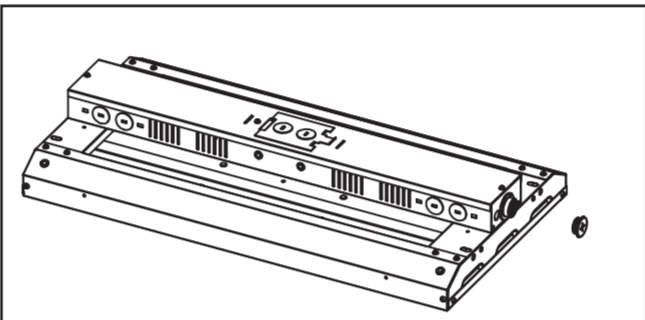


2.Install the sensor adapter.

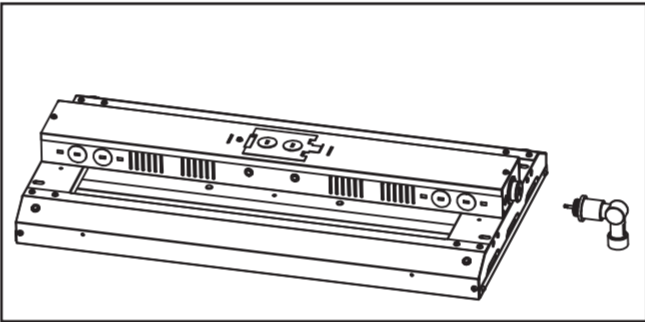


5

INSTALLATION INSTRUCTION


3.Install the sensor.

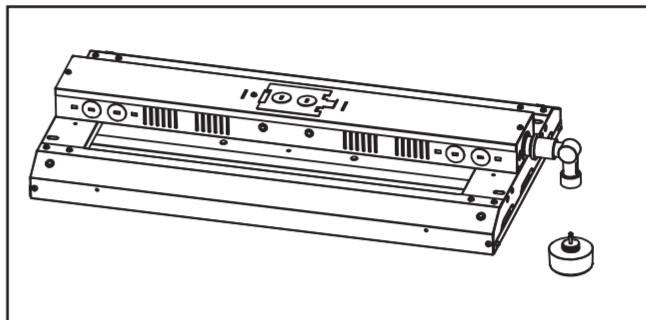

4.The installation is completed.

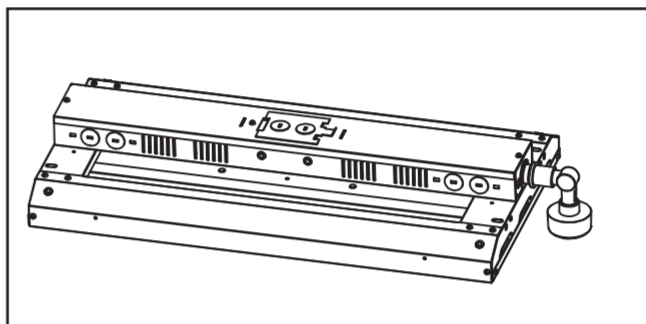


General Wiring Diagram

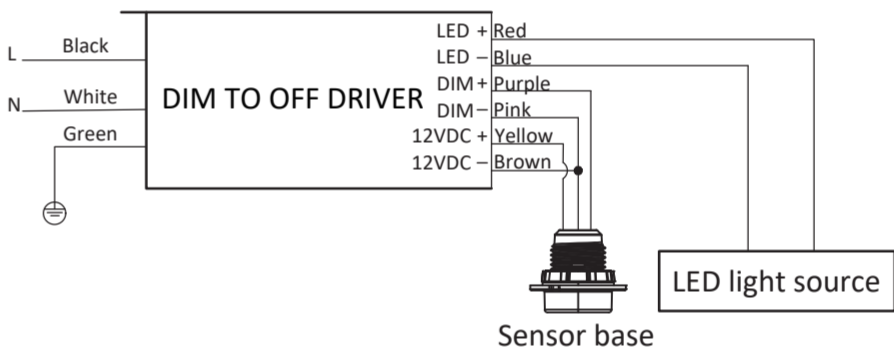


6

TOOLS REQUIRED

NOTE: Keep your receipt and these instructions for Proof of Purchase.

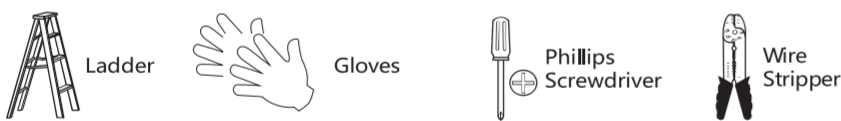

PACKAGE CONTENT


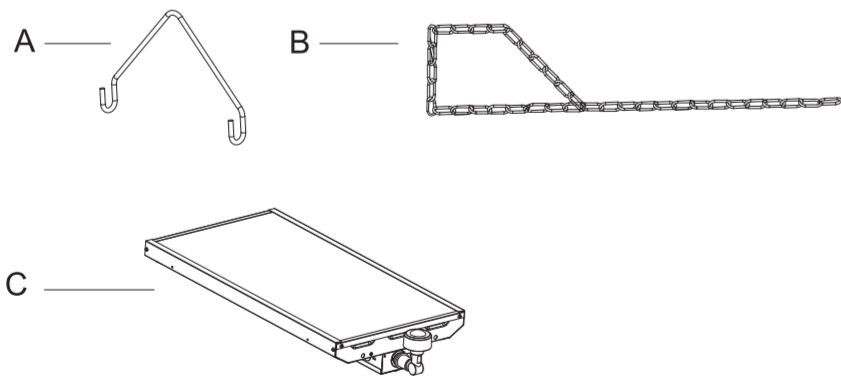


	PARTS	pcs
A	vhook	2
B	chain	2
C	LED fixture	1

3

INSTALLATION INSTRUCTION

General Wiring Diagram

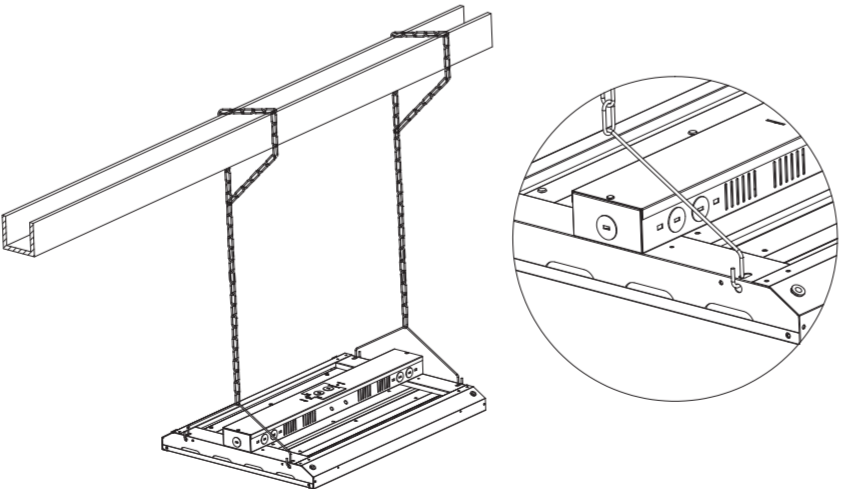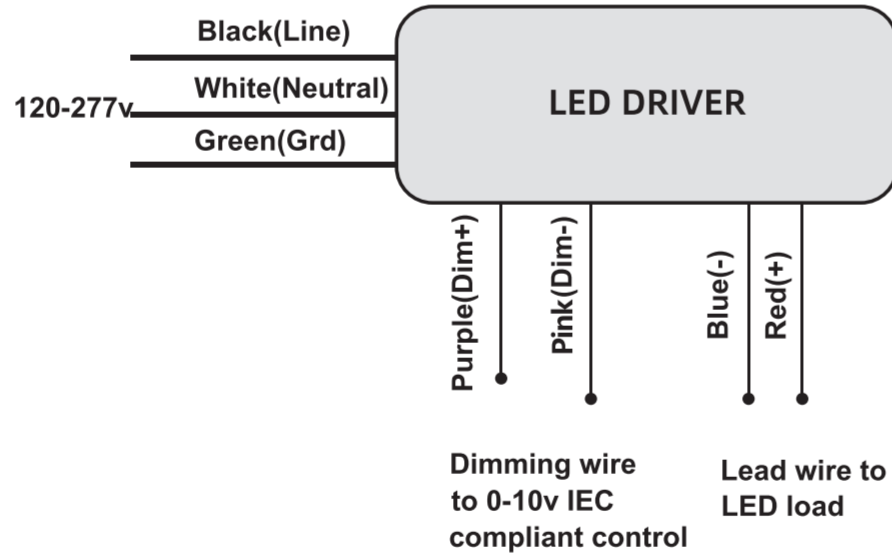

4

WARRANTY

This product is warranted for 5 years from the date of purchase. If this product does not perform to the specifications supplied on this package, send an email to support@runbisonlighting.com for product return and replacement. This replacement is the sole remedy available. Liability for incidental or consequential damage is expressly excluded

7