




UKS03

INSTRUCTION MANUAL

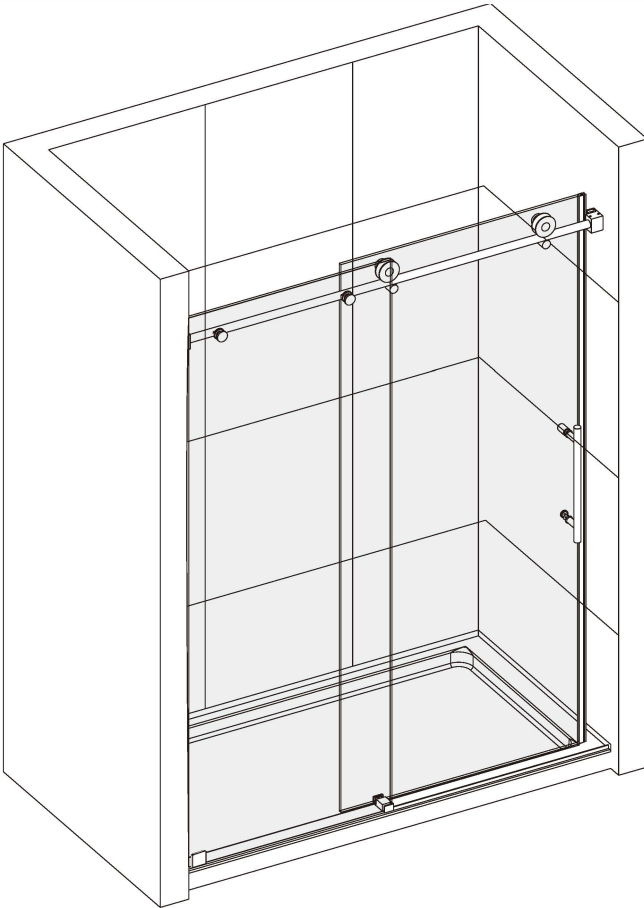

2 PEOPLE REQUIRED

Please keep this manual and the product code number for future reference and to order replacement parts if necessary

GENERAL INSTRUCTIONS

- Please read this manual carefully and thoroughly before proceeding.
- For your safety, it is recommended that you wear safety glasses at all times during installation.

INSTALLATION OVER CERAMIC TILES

- If you are installing the shower door over ceramic tiles, make sure that the tiles lay completely under the wall jamb.
- Use silicone to seal the gaps where the ceramic tiles meet the fixed panel.











NOTICE

- Caulking is not required inside the shower, unless otherwise stated.
- Some models are equipped with clear sealing gaskets.

CARE FOR YOUR SHOWER DOOR



- Do not use scouring powder pads or sharp instruments on metal pieces or glass panels.
- To keep the panels and metal parts looking new, occasionally wipe them down with a mild soap diluted in water.
- We recommend wiping the glass panels with a squeegee after each use.

TOOLS REQUIRED


 SPIRIT LEVEL	 POWER DRILL	 PENCIL	 SILICONE	 MALLET
 TAPE MEASURE	 SCREW DRIVER	 6mm&3mm(1/4" & 1/8") DRILL BITS	 HACKSAW	 SAFETY GLASSES





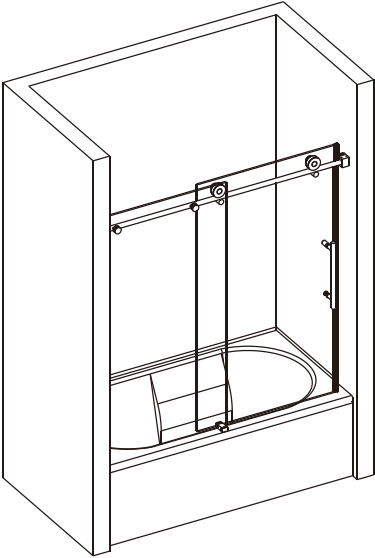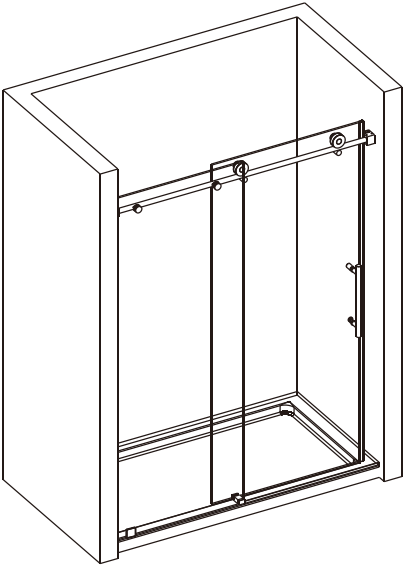



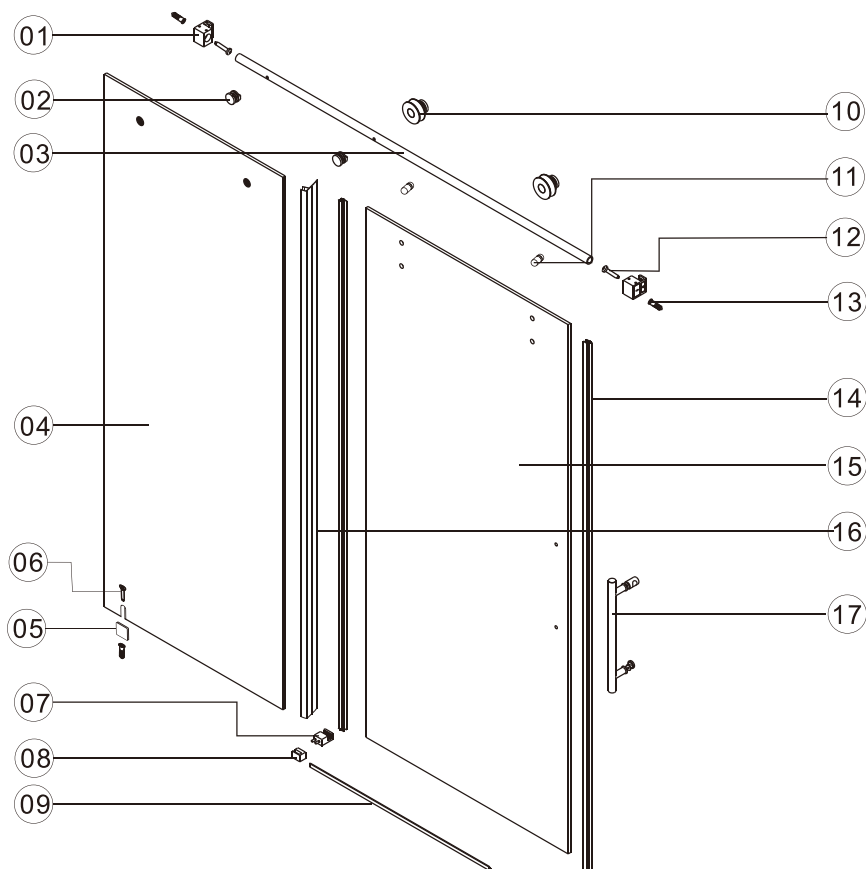








* Use a 6mm(1/4") drill bit for ceramic when drilling into ceramic tiles

CHOOSE A CONFIGURATION






PARTS LISTING




ITEM	PARTS	DIAGRAM	QTY	ITEM	PARTS	DIAGRAM	QTY
1	Guide rail bracket		2	10	Ø70 Roller		2
2	Track holder for fixed panel		2	11	Anti jumping knob		2
3	Rail		1	12	Screw St4x30		2
4	Fixed panel		1	13	Wall plugs Ø6		2
5	Wall mount bracket		1	14	Door seal		2
6	Screw St4x20		1	15	Sliding door		1
7	Floor guide for fixed glass		1	16	Handle		1
8	Floor guide for door glass		1	17	Fixed panel seal		1
9	Anti-splash threshold		1				



1

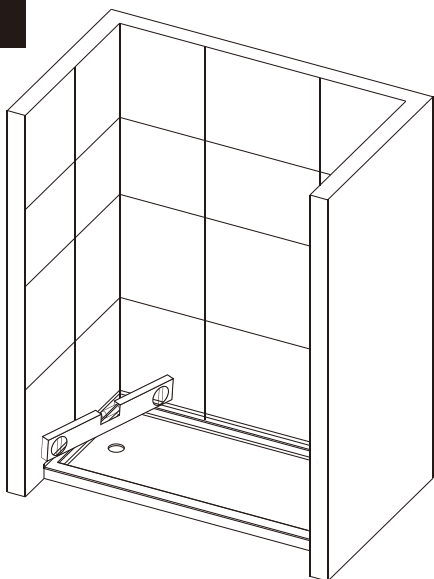


2

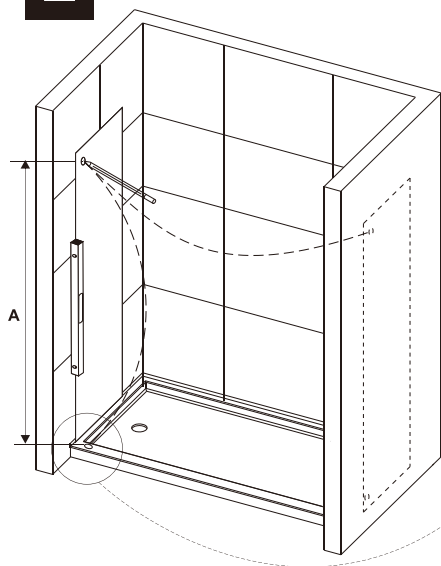


Product Height"	Header Bar Height"(A)
60"	56-1/4"
66"	62-1/4"
76"	72-1/4"
79"	75-1/4"





3

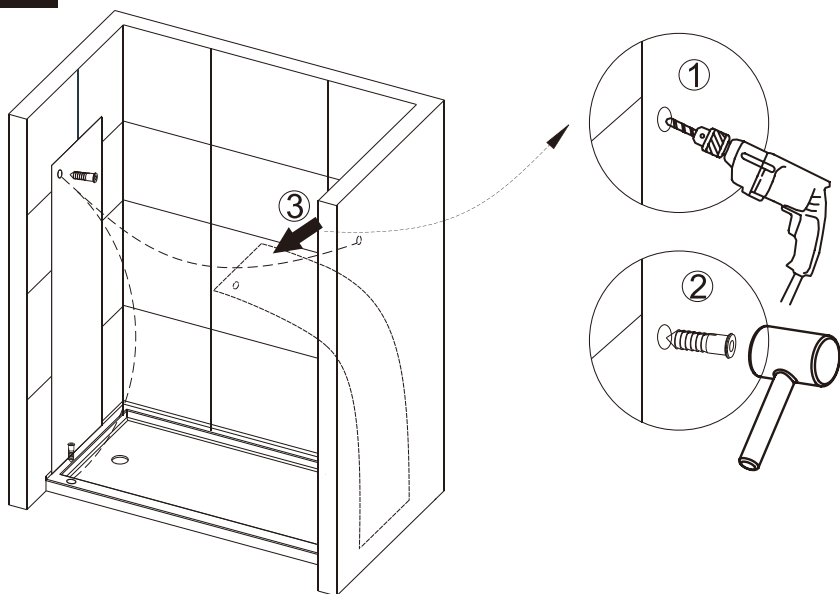






4

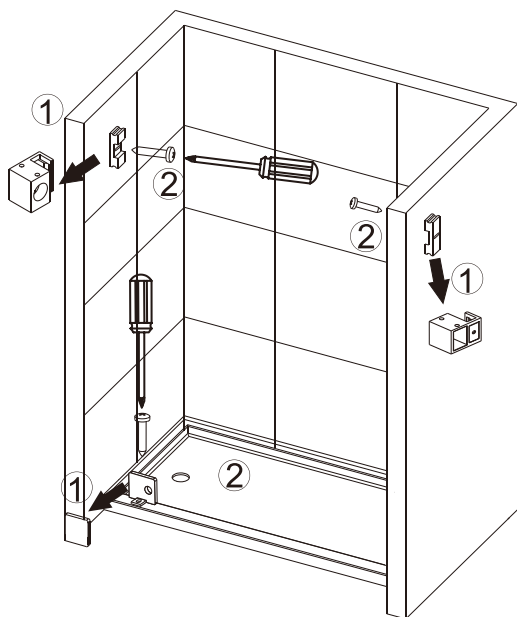




5

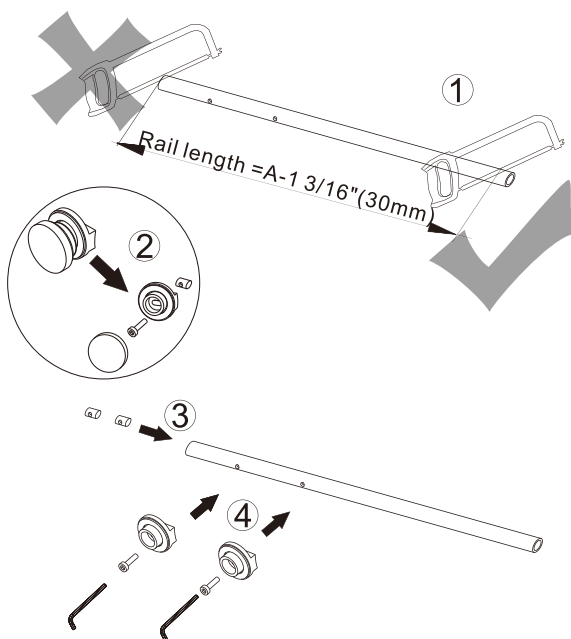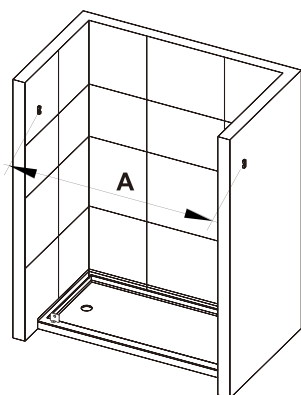






6

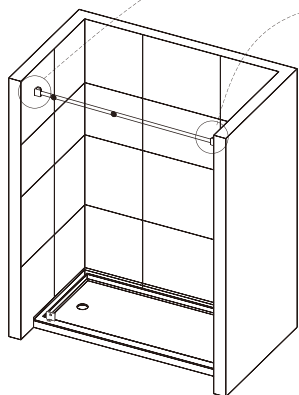







7

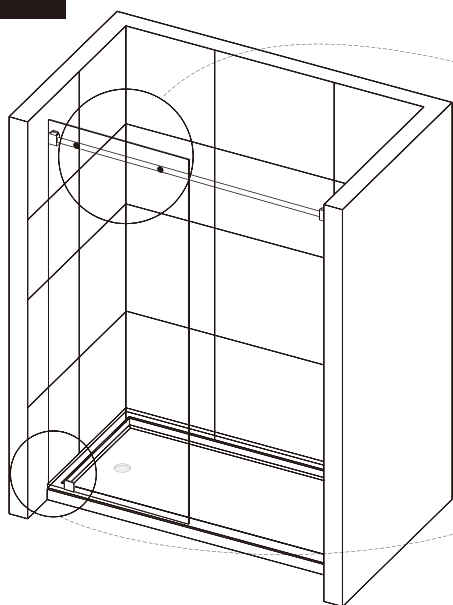





8

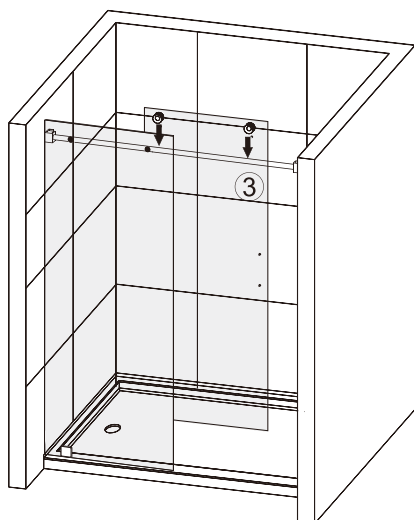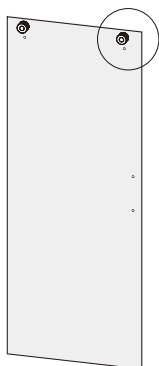




9

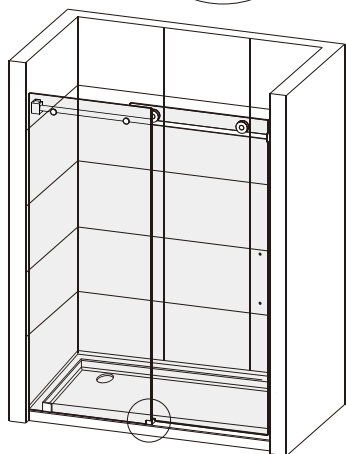








10

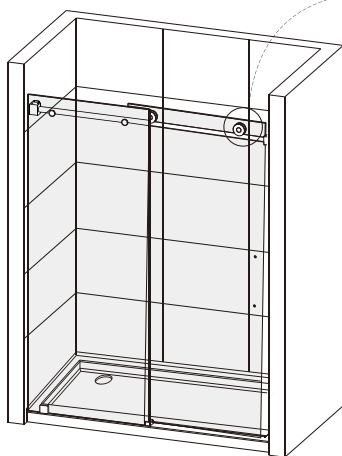


11

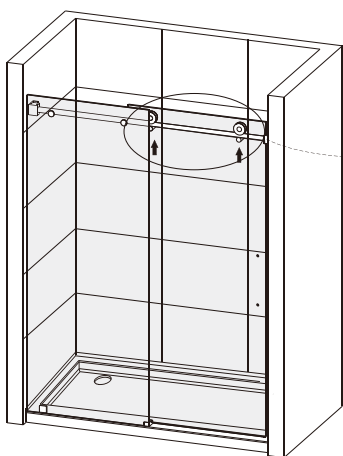



12



13

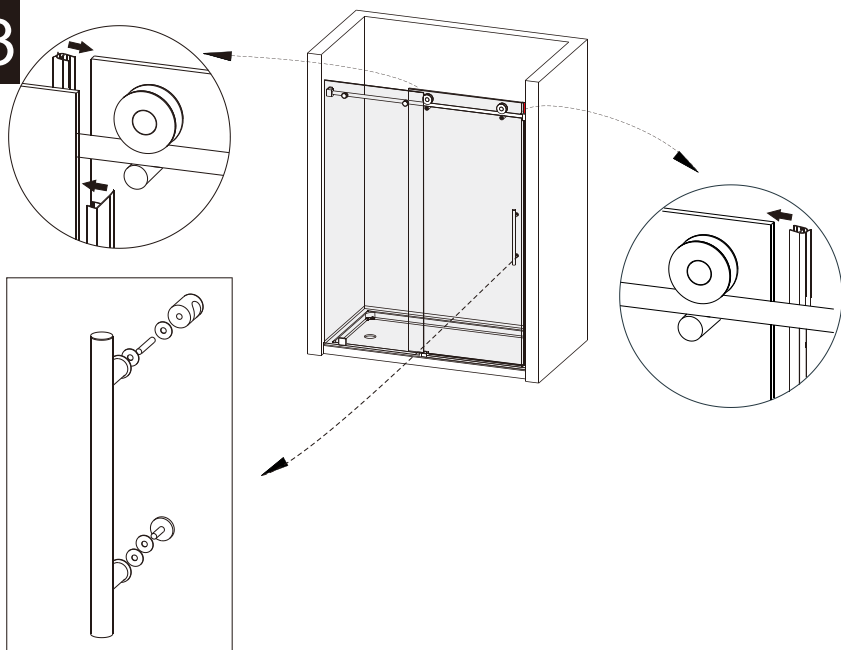

14

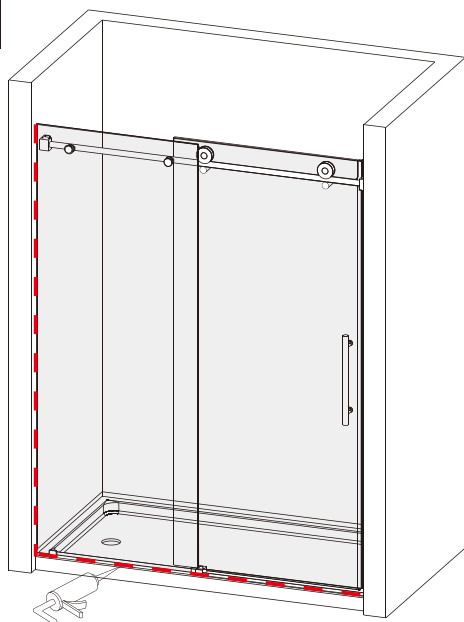

24 HOURS