


LED High Bay Light

INSTRUCTION MANUAL


READ THE INSTRUCTIONS BEFORE STARTING THE INSTALLATION AND KEEP THEM FOR FUTURE REFERENCE.
Electrical products can cause death, injury or damage to property. If in doubt about the installation or use of this product, consult a competent electrician.

1 Rings Type


1. Tighten the ring clockwise



2. Tighten the screw

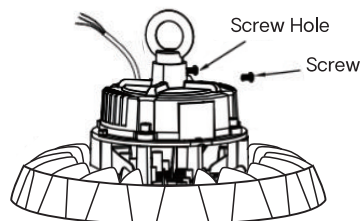


3. Hang the light




2 Hook Type


1. Tighten the hook clockwise




2. Tighten the screw



3. Hang the light




4. Tighten the screw




CCT and Watts selected Operation Manual:

A/B/C (Minimum/Middle/Maximum wattage), WW/NW/CW (CCT: 35K/40K/50K)


1. Remove the rubber pad from the driver



2. Use the slide switch to select wattage and CCT




3. Attach the rubber pad to the driver



LED High Bay Light

Wiring Connection


Turn off the power, connect AC WIRE.
Black wire L, White wire to N, and green wire to E.
Connect wires as below, purple wire is DIM+.
Pink wire is DIM-, Black/White wire is 12V +

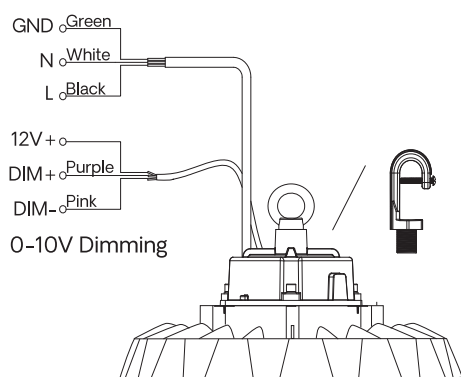


Tip: The above content is for reference only,
please take the real thing as the criterion.

Twist in sensor installation manual


1 Take out cover cap.

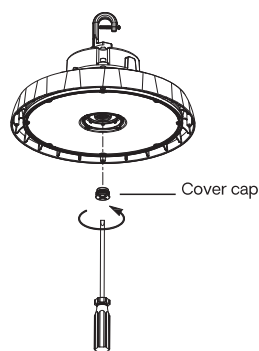

2 Twist in sensor.



3 Finished installation.



Wiring Diagram

