

Features

- 36" minimum base cabinet width
- Large/medium bowls
- Versatile design allows large bowl to be installed on the right or left
- Large bowl depth: 9-1/2" (241 mm); small bowl depth: 7-1/2" (191 mm)
- Slim divider creates more space while allowing you to completely submerge pots and pans
- Offset drain in larger bowl increases workspace in the sink
- Includes K-5655 sink rack
- Includes cutout templates and installation clips
- Matte finish offers rich, dimensional color

Material

- KOHLER Neoroc® composite is durable and built to withstand day-to-day cleaning tasks
- Solid color throughout the sink
- Heat-resistant up to 750°F
- Scratch-, stain-, chip-, and thermal-shock-resistant

Installation

- Undermount
- Easy to install in a one-person, single-day project

Recommended Products/Accessories

K-5198 Sink Rack

K-8801 Sink drain and strainer with tailpiece

K-8799 Sink drain and strainer basket

K-23726 Drain treatment

K-23730 Neoroc® cleaner

Optional Products/Accessories

K-11352 Disposal Flange with Stopper

K-9000 P-Trap

Included Components

K-5655 Sink Rack



Codes/Standards

CSA B45.5/IAPMO Z124 IAPMO Certification

KOHLER® Neoroc® Sinks Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color	Code	Description
	CM6	Matte White
	CM7	Matte Graphite
	CM1	Matte Black
	CM2	Matte Brown
	СМЗ	Matte Taupe
	CM4	Matte Grey





33-1/2" undermount double-bowl kitchen sink **K-8204**

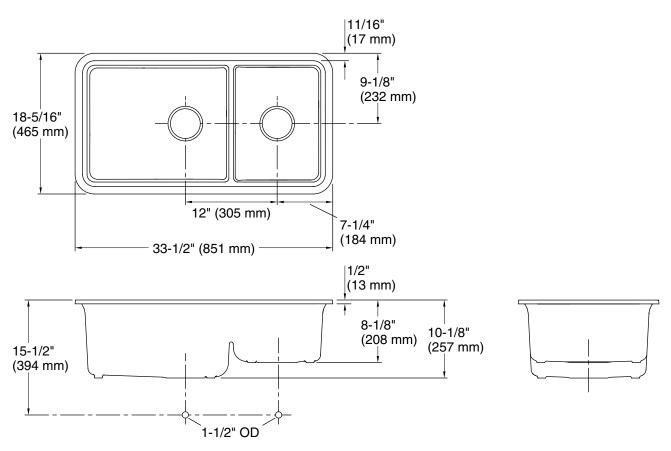

Technical Information

All product dimensions are nominal.

Bowl configuration: Off-set Large/small Min. base cabinet 36" (914 mm)

width:

Bowl area (Double Length: 18-7/16" (468 mm) Equal Basins): Width: 15-3/16" (386 mm)

Bowl depth: 9-1/2" (241 mm)
Water depth: 9-1/2" (241 mm)

Bowl area (Double Length: 11-5/16" (288 mm) Equal Basins): Width: 15-3/16" (386 mm)

Bowl depth: 7-1/2" (191 mm) Water depth: 7-1/2" (191 mm)

Drain hole: 3-7/8" (98 mm)

Template: 1256394-7, required, included

Notes

Install this product according to the installation instructions.

