

50W LED Flat Panel Light

VEVOR®

PRESENTING TRUE-TO-LIFE COLORS

Create a comfortable lighting environment for our eyes



Our




Other

CRI 80+

Want to create a comfortable and bright indoor environment? This LED panel light is undoubtedly your top choice. A square design, adjustable brightness, and impressive 6000LM luminous flux make your space as bright as daylight.

NO VISUAL STROBE

Reduce visual fatigue



Equipped with a constant current drive chip, the internal lighting emits soft and non-glaring light, protecting your family's eye health and relieving visual fatigue.

LOW ENERGY CONSUMPTION & HIGH BRIGHTNESS

Using high-brightness LED chips for even illumination





The LED light fixture consists of high-brightness LED chips that consume low energy, deliver powerful illumination, ensure stable performance, and have a long lifespan.

ULTRA-THIN AT 1.4"

Seamlessly integrated with the ceiling



This flat panel LED ceiling light has a thickness as low as 1.4 inches. Once installed, it fits tightly against the ceiling or wall, leaving no gaps, thus saving you more space.

YOU CAN INSTALL IT THIS WAY

Brightens and beautifies the space



Drop Mounted (Includes 4 installation ropes)



Surface Mountde (Surface kit not included)



Recessed Mounted (No additional mounting accessories required)

This LED light fixture is suitable for a wide range of applications, meeting the lighting needs of both residential and commercial environments. You can install it on the ceiling or use it to create decorative wall lighting.

VEVOR®

Model: HFPL24D-50

Rated Voltage: AC 120V-277V 50Hz/60Hz

Rated Power: 50W ±10%

Max. Luminous Flux: 6000lm ±10%

Color Temperature: 3500K/4000K/5000K


Color Rendering Index (CRI): Ra ≥80


Main Materials: Aluminum Profile + PS (Polystyrene) + Iron

Product Weight: 8.3 lbs / 3.74 kg

Package Contents: User Manual x1

Installation Suspension Ropes x4

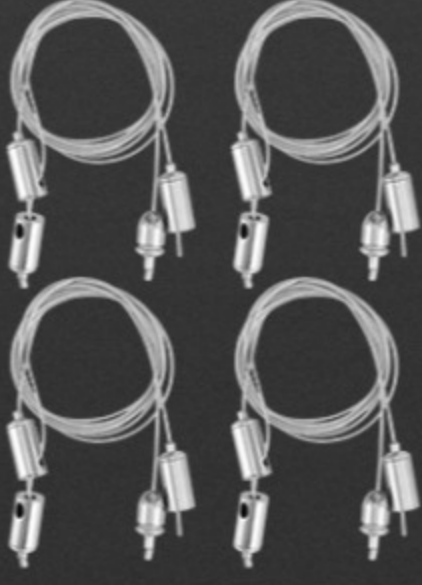

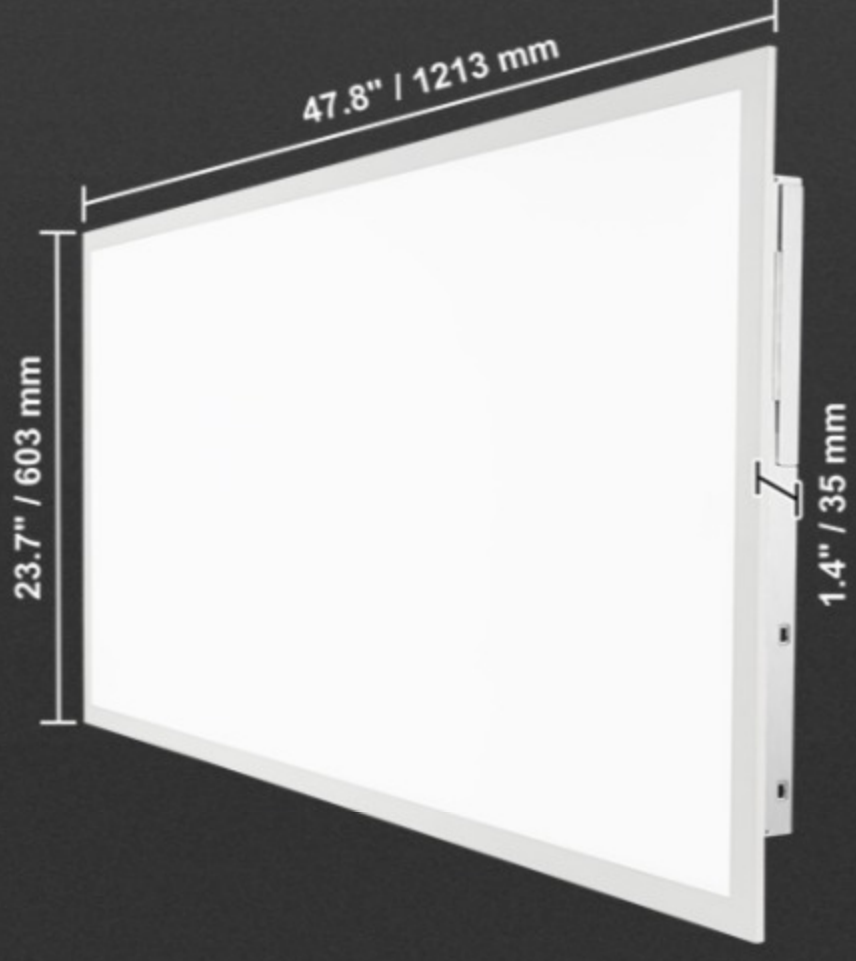

We continue to be committed to provide you with cost-effective tools. "Save Half" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

Specification

Item Model Number	HFPL24D-50	Rated Voltage	AC 120V-277V 50Hz/60Hz
Rated Power	50W ± 10%	Max. Luminous Flux	6000lm ± 10%
Color Temperature	3500K/4000K/5000K	Color Rendering Index (CRI)	Ra ≥80
Main Materials	Aluminum profile + PS (Polystyrene) + Iron	Product Weight	8.3 lbs/3.74 kg
Product Dimensions	23.7 x 47.8 x 1.4 in/603 x 1213 x 35 mm		