

# TINCRAFT™


Circles, Squares & Triangles

Tegular

smooth texture



Tincraft Squares panels with  
Suprafine XL 9/16" suspension system

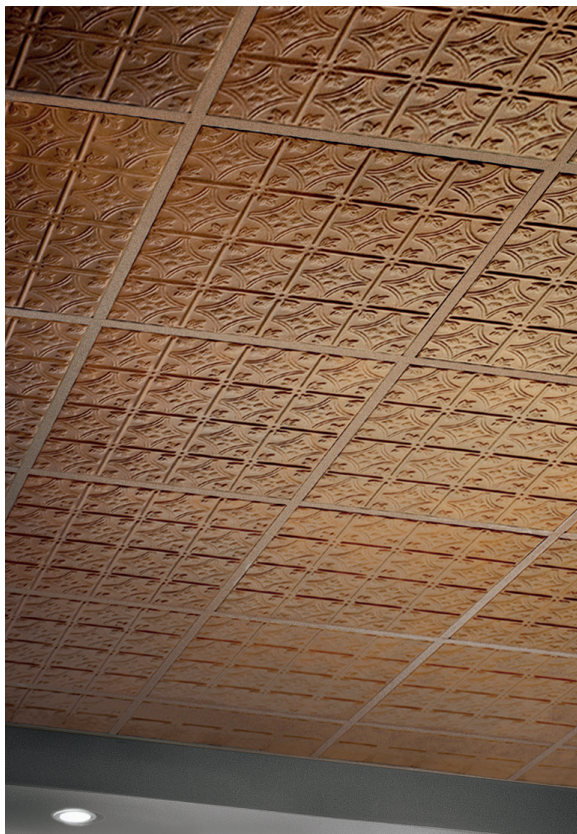

Tincraft Circles panels with Faux Coat Bronze and coordinated  
Prelude XL 15/16" suspension system



Faux Coat Finish

[armstrongceilings.com/capabilities](http://armstrongceilings.com/capabilities)  
See more photos at:  
[armstrongceilings.com/photogallery](http://armstrongceilings.com/photogallery)

The look of old-world tin ceilings with low-relief panels in classic designs and an array of standard metal colors. Offers high sound blocking.

## KEY SELECTION ATTRIBUTES

- Early 20th century embossed metal look
- Affordable, practical alternative to traditional tin and metal ceilings
- Finely detailed design for upscale look
- High sound-blocking CAC 35
- Made in the U.S.A. of domestic and global content
- Build America, Buy America (BABA) Act compliant

NOTE: Not recommended for areas requiring acoustical performance

## COLORS



Color finishes available on Tincraft™ Circles panels only. Colored ceilings are dye-lotted and should be segregated by dye lot. Do not mix.

## FACE VIEWS (1/4 of 24" x 24" panel shown)



## DETAILS (Other Suspension Systems compatible. Refer to listing on next page.)



1. Tincraft™ Circles
2. Tincraft™ Squares
3. Tincraft™ Triangles
4. Tincraft™ Circles with Prelude® 15/16" suspension system
5. Tincraft™ Squares with Suprafine® 9/16" suspension system
6. Tincraft™ Triangles with Suprafine® 9/16" suspension system

# TINCRAFT™

## Circles, Squares & Triangles

### Tegular

### smooth texture

RECYCLED  
CONTENT

LEED V5

Ecomedes Data

UP TO  
56%

#### COMMON MATERIALS FRAMEWORK

Human Health	Declare Label	Climate Health
	HPD	Ecosystem Health
	3rd Party CDPH	Circular Economy
OCCUPANT EXPERIENCE		Acoustics

## VISUAL SELECTION

armstrongceilings.com/suspdwgs	Susp. Dwg.	Item No.	Dimensions (Inches)
TINCRAFT™ Circles	3	8008	24 × 24 × 3/4"
15/16" Flush Tegular			
TINCRAFT™ Squares	25	8009	24 × 24 × 3/4"
9/16" Flush Tegular			
TINCRAFT™ Triangles	25	8010	24 × 24 × 3/4"
9/16" Flush Tegular			

## PERFORMANCE SELECTION

Dots represent high level of performance.

\$\$\$\$

UL Classified Acoustics	Total Acoustics <sup>1</sup>	Fire Performance	Light Reflect (White only)	Anti-Mold/Mildew	Sag Resistant	Certified Low VOC Emissions	Durability	Recycled Content	Recycle Program	Warranty
N/A	35	N/A	Class A	0.78	N/A	N/A	*	Std	Std	1-Yr
N/A	35	N/A	Class A	0.78	N/A	N/A	*	Std	*	1-Yr
N/A	35	N/A	Class A	0.78	N/A	N/A	*	Std	*	1-Yr



<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of sound absorption and sound blocking in one product.  
◆ Add 2-letter color suffix to item number when specifying or ordering (e.g., 8008 P W)



Circles



Squares



Triangles

Images represent a 12" × 12" section of panel.

## SUSPENSION SYSTEMS

15/16"	Prelude®
9/16"	Suprafine®

For coordinating color, specify Prelude® XL® items 7301 main beam, XL7342, XL7328 cross tees, and 7800 wall molding with the appropriate 2-letter color suffix.

## PHYSICAL DATA

**Material**  
Wet-formed mineral fiber

**Surface Finish**  
Factory-applied latex paint

**Fire Performance**  
Class A: ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index of 25 or less. Smoke Developed Index of 50 or less (UL® labeled).

**ASTM E1264 Classification**  
Type A1, Form 2, Pattern 1; Fire Class A (Classic embossed tin ceiling design)

**Humidity/Sag Resistance**  
Standard performance ceiling panels are recommended where the building is enclosed and the HVAC is continuously functioning.

### VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.2, 2017. This standard is the guideline for low emissions in LEED®, WELL Building Standard®, Living Building Challenge® (LBC), CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

### High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

### Insulation Value

Average R Factor – 1.6 (BTU units)  
Average R Factor – 0.28 (Watts units)

**1-Year Performance Guarantee & Warranty**  
Details at [armstrongceilings.com/warranty](http://armstrongceilings.com/warranty)

**Weight; Square Feet/ Carton**  
8008 – 0.90 LBS/SF; 48 SF/CTN  
8009, 8010 – 1.23 LBS/SF; 32 SF/CTN

**Minimum Order Quantity**  
1 carton