


# Before you Install

Water pressure check, dimensional drawing


## Confirm dimensions of product with installation space

Wall


Unit: inches

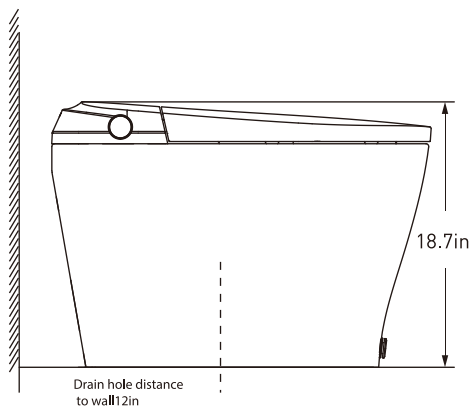

Side profile



Front view

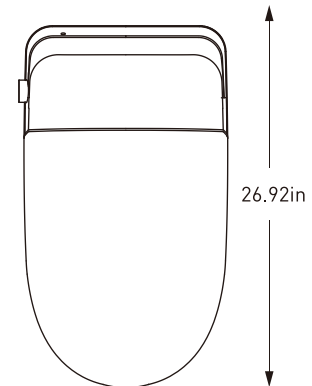


Top view

# Installing your product

Install your unit using the following steps


## 1 Open the box right side up

Remove the accessories first, then remove the unit from the top, as shown in the diagrams below.

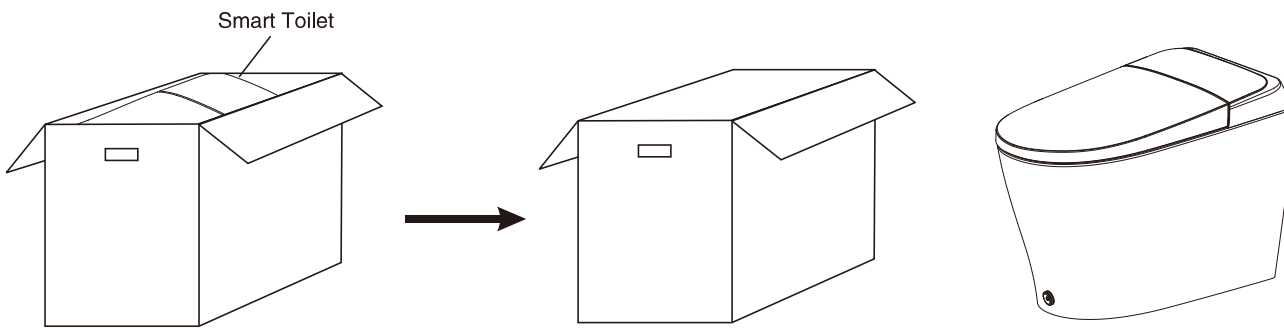


## 2 Mark your drainage hole with a cross

1.Align the flange with the drain hole, and mark the positions of the four mounting holes of the flange on the ground with a marking pen.

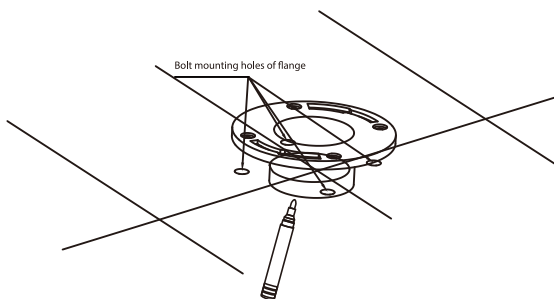


2.Place the toilet on the ground with aligning the ground drain hole, place two fixing blocks in the openings on the left and right sides of the toilet bottom, mark the screw mounting hole positions of the fixing block with a marking pen, and then remove the toilet.

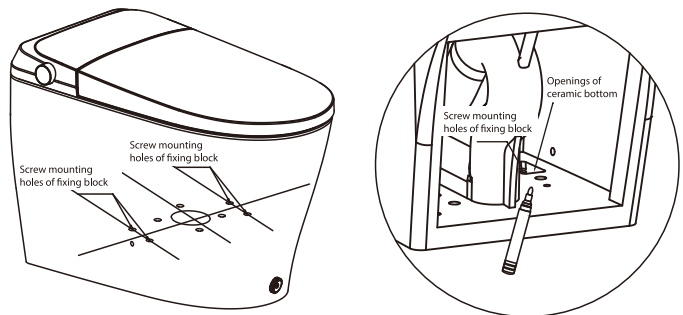


## 3

1.Put the flange on the drain hole, and fix it on the ground with four bolts. Then Seal the flange with glass glue.

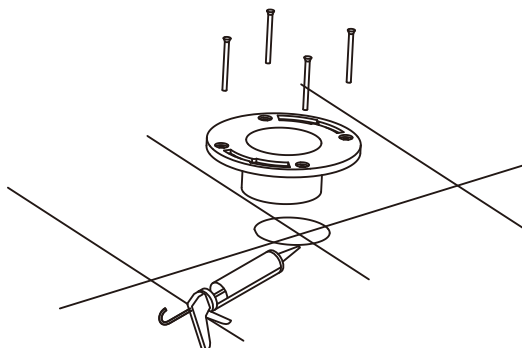


2.Place the fixing block on the installation position marked by the line drawing pen and fasten it with two bolts.

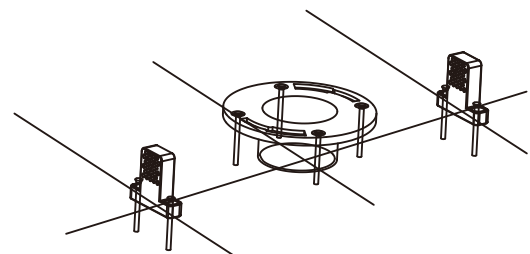


## 4 Install the ceramic body, water supply hose and water filter


1. Place the wax ring on the drain hole at the bottom of the ceramic.

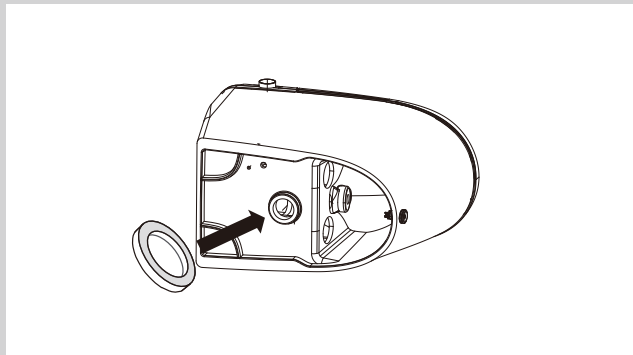


2. Align the ceramic drain with the drain hole on the ground, and press down to make the wax ring fully contact with the ground.

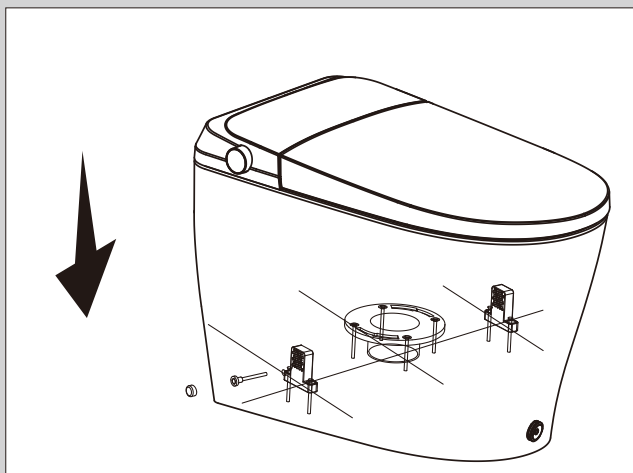


3. Fix the two sides of the ceramic with two bolts, and finally install the cap.

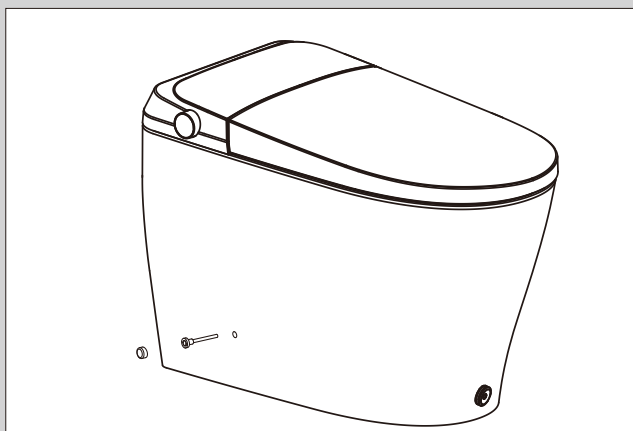


4. Attach the flush water hose to the T-valve and tighten.

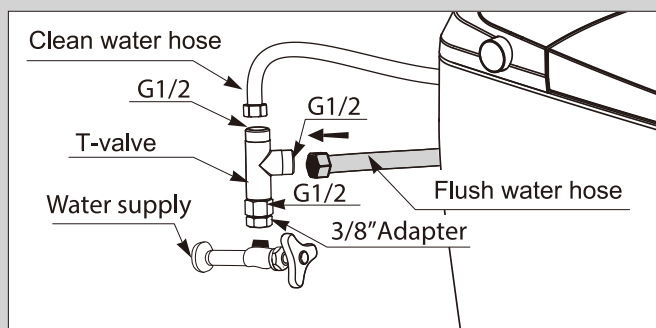

5. Attach the clean water hose to the T-valve and tighten.

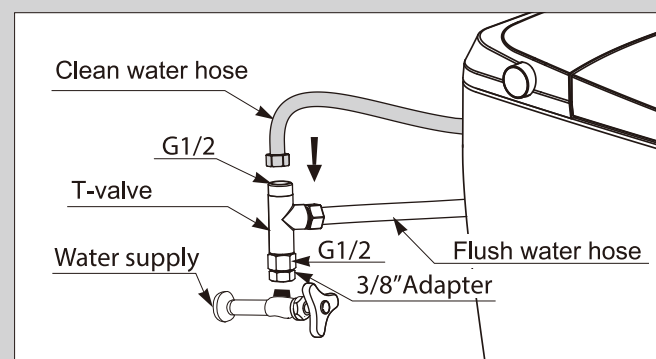

6. Connect the T-valve to the water supply and tighten. Use gasket to prevent water leakage.

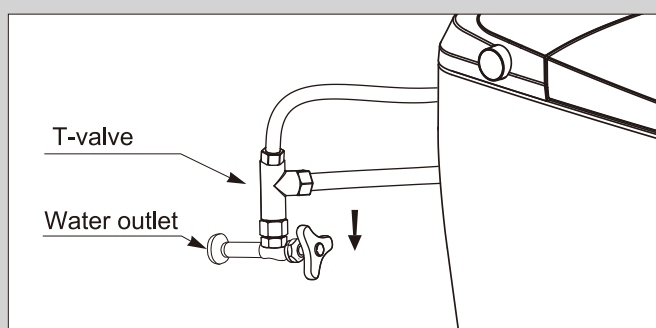

7. Finish installation.