KOHLER, Faucets

Triton® Bowe® industrial exposed shower K-630T40-4AG

Features

- 8" (203 mm) widespread faucet holes
- 1/4-turn full brass ceramic valve
- Includes Coralais® showerhead with 1.75 gal/min (6.6 l/min) maximum flow rate [max at 60 psi (4.14 bar)]; 30% more water saving than 2.5 gpm showerheads
- 2-7/16" vandal-resistant metal lever handles
- Drain sold separately

Material

Solid-brass construction for durability and reliability

Recommended Products/Accessories

K-23723 Faucet cleaner



Codes/Standards

None Applicable

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


CP Polished Chrome





Triton® Bowe® industrial exposed shower

ndustriai exposed snower **K-630T40-4AG**

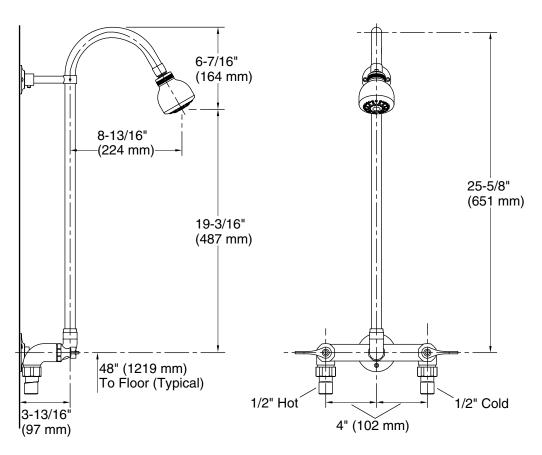

Technical Information

All product dimensions are nominal. Valve body: Cast brass

Drain included: No

Showerhead/Body Spray:

Rated maximum 1.75 gal/min (6.6 l/min)

flow:

Pressure: 60 psi (4.1 bar)

Notes

For use with automatic compensating valves rated at 1.35 gal/min (5.1 l/min) or less. Install this product according to the installation instructions.

