

UNIVERSAL OVAL

ESTATE SERIES




70 x 41 ¾ x 26 ¼

SOAKER MODEL #AI7242RUOTO

WHIRLPOOL MODEL #AI7242RUO

AIR-WHIRLPOOL MODEL #AI21LUX7042

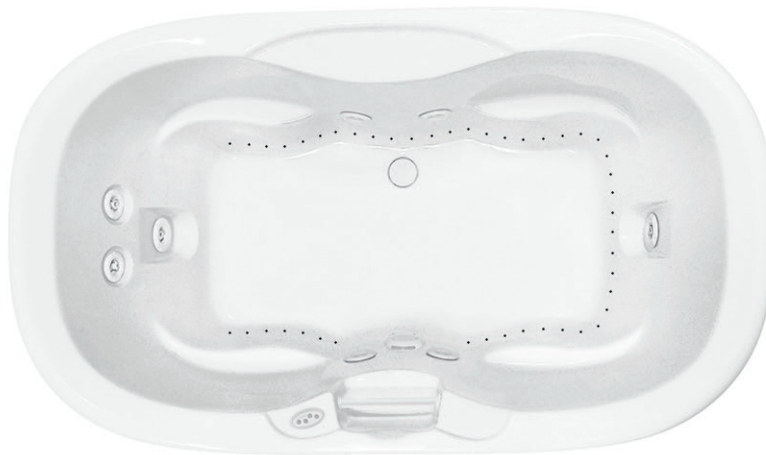

FEATURES ~

- Deep, ergonomic bathing well
- Sculpted armrests
- Integral clear acrylic grab bar (1)
- Pre-leveled ABS support base
- Slip resistant floor
- Premium cast acrylic surface
- Limited lifetime warranty

COLOR & TRIM OPTIONS

Stock	Upgraded	Premium
White	Biscuit	Black Sterling Silver



AVAILABLE SYSTEMS


WHIRLPOOL

- Electronic control
- 8 hydrotherapy jets
 - 3-jet back, shoulder and neck massage system (dual port, spinning)
 - Leg and foot jets
- Whirlpool pump

AIR-WHIRLPOOL COMBINATION


- Whirlpool system, plus:
- Perimeter air system
- Variable speed heated-air blower with purge and dry cycle
- Electronic wave and pulse modes
- 1.5kW inline maintenance heater



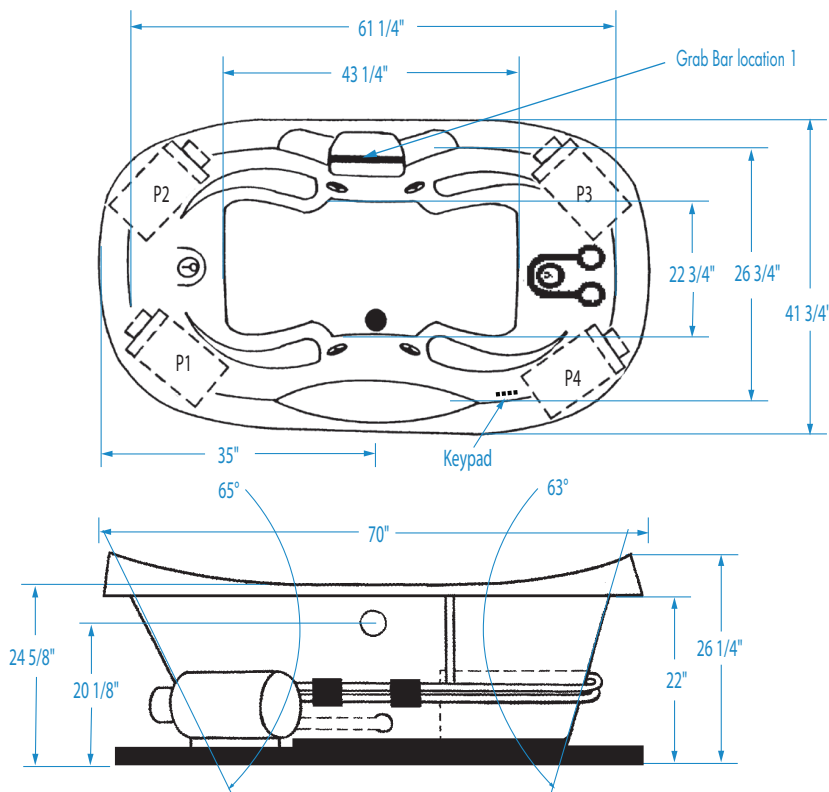


UNIVERSAL OVAL

70 x 41 3/4 x 26 1/4 inches



Note: For Air-whirlpool, no alternate pump/blower location available.



FEATURES lbs (kg) Dimensional Tolerance $\pm 3/8"$. Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	Jets	Pump	Air System	Blower	Heater	Controls	Drain	Pkg. Wt.
Soaker #AI7242RUOTO	Cast Acrylic	0	—	—	—	—	—	Center Front	169
Whirlpool #AI7242RUO	Cast Acrylic	8	102 GPM	—	—	1.5 kw Inline (optional)	Electronic	Center Front	219
Air-Whirlpool #AI21LUX7042	Cast Acrylic	8	102 GPM	Channel	Variable speed	1.5 kw Inline	Electronic	Center Front	256

DIMENSIONS inches

Width Overall / Net	Depth Overall / Net	Height Overall / Net	Skirt Height
70	41 3/4	26 1/4	—

SUMP DATA inches

Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
95	76	61 1/4	43 1/4	26 3/4	22 3/4

PLUMBING DIMENSIONS inches

A	B	Drain Diameter / Clearance
6 1/2	13 1/4	2 / 3/4

NOTES:

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 16 minimum access required at pump/blower location(s).

3) If a (3T) tiling flange is selected, then the keypad is located opposite of the flange.

ELECTRICAL DATA

Component	Specification	Requirement
Pump	9 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI
Optional Heater	1.5 kW; 12 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI
Blower	1.0 HP; 9.5 AMP; 120V	15 AMP; 120V, separate circuit; Class A GFCI

NOTE:

1) This whirlpool must be hard wired to the breaker box. Three outlets will be supplied on the air-whirlpool.