

Features

- Two-handle widespread lavatory faucet for 8" - 16" centers.
- UltraGlide engineered ceramic disc valves exceed industry longevity standards times for a lifetime of durable performance.
- Premium metal construction.
- Handles pre-assembled on valves to simplify installation.
- Red/blue indexing.
- Quick-connect hose connectors make installation a snap.
- Kohler finishes resist corrosion and tarnishing, exceeding industry standards two times.
- Less drain and lift rod.
- 1.2 gal/min (4.5 l/min) maximum flow rate.



ADA

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

DOE - Energy Policy Act 1992

EPA WaterSense®

ADA

ICC/ANSI A117.1

All applicable US Federal and State material regulations


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	CP	Polished Chrome
--	----	-----------------

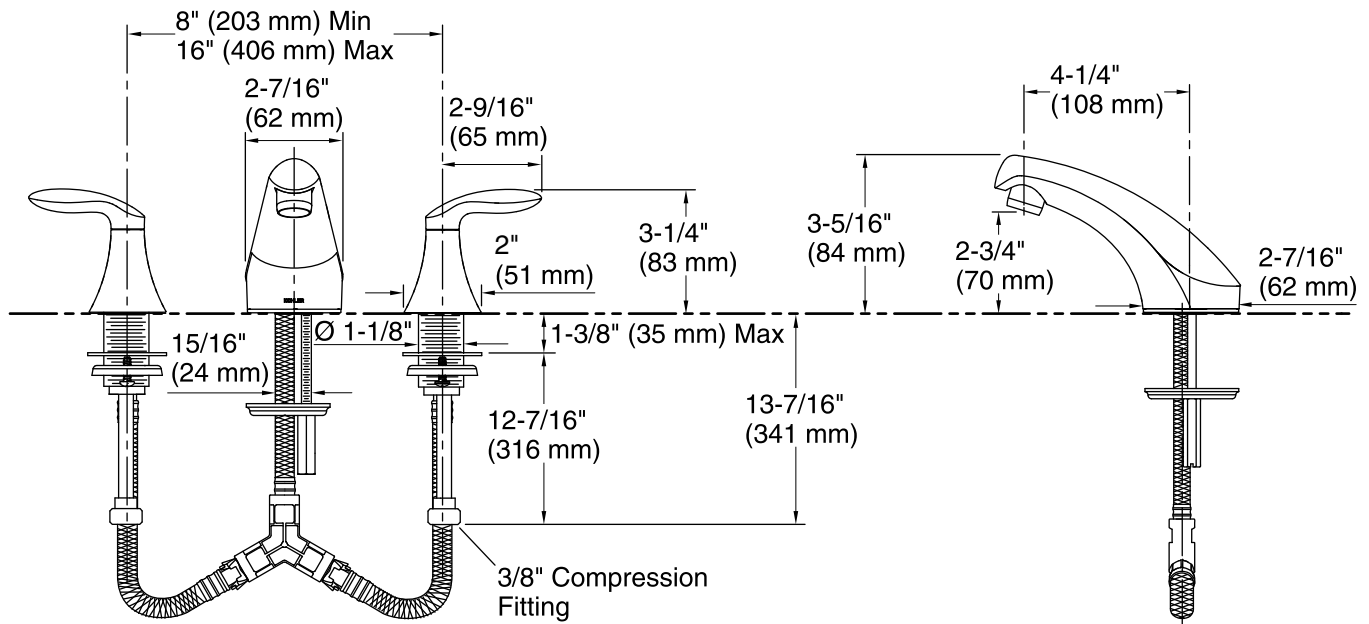

Technical Information

All product dimensions are nominal.

Valve body: Machined Brass
Spout reach: 4-11/16" (119 mm)

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)
Pressure: 60 psi (4.1 bar)

Notes

Install this product according to the installation guide.

ADA compliant when installed to the specific requirements of these regulations.