# **Components**™

**KOHLER**, Faucets MasterShower™ transfer valve trim with Lever handle K-T78026-4

### **Features**

- Single lever handle controls flow to outlets
- 360° handle rotation with three-outlet operation
- 120° handle rotation with two-outlet operation
- Includes faceplate with ADA-compliant metal level handle
- Coordinates with Components faucets, accessories, and showering components to complete your bathroom
- When used with K-728 Series MasterShower diverter valves, handle controls flow to two or three outlets individually or any two outlets at a time
- When used with K-737 Series MasterShower diverter valves. handle controls flow to two or three outlets individually or only one outlet at a time.



- Premium material construction with metal handle ensures reliability and durability
- KOHLER finishes resist corrosion and tarnishing

## Installation

- Wall-mount
- Patented K-joint installation technology ensures consistent trim appearance, regardless of variability in valve rough-in
- Trim only; requires valve to complete installation (sold separately)

# **Required Products/Accessories**

K-728-K 3/4" Two- or Three-Way Transfer Valve or

K-737-K 3/4" Two- or Three-Way Diverter Valve

## Recommended Products/Accessories

K-23723 Faucet cleaner



**CSA B651** ADA OBC

# Codes/Standards

ASME A112.18.1/CSA B125.1 ADA ICC/ANSI A117.1 CSA B651 OBC

# **KOHLER® Faucet Lifetime Limited** Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant™ Polished Nickel
	BN	Vibrant™ Brushed Nickel
	BL	Matte Black
	2MB	Vibrant <sup>™</sup> Brushed Moderne Brass
	TT	Vibrant Titanium



# **Components**™

**KOHLER** Faucets MasterShower™ transfer valve trim with Lever handle K-T78026-4

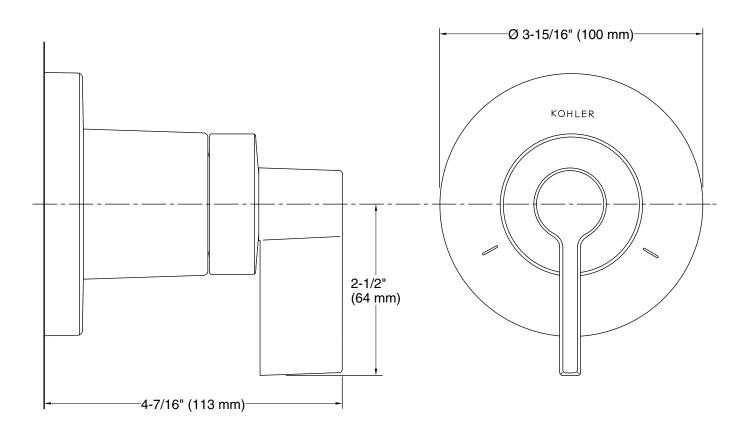

# **Technical Information**

All product dimensions are nominal.

Drain included: No

# **Notes**

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

