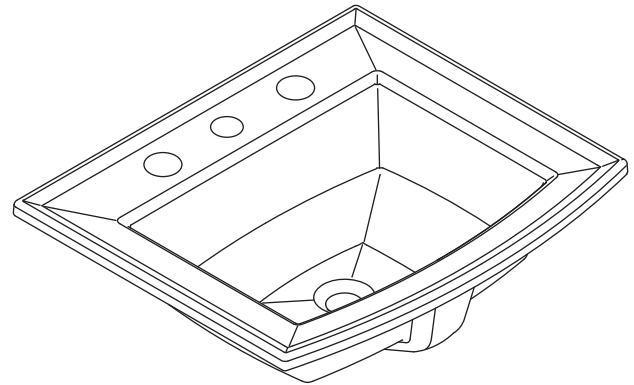# KOHLER®

Features

- *Vitreous china*
- *Drop-in*
- *With overflow*
- *8″ (203 mm) centers (-8), 4″ (102 mm) centers (-4), or single-hole (-1)*
- *22-5/8″ (575 mm) x 19-7/16″ (494 mm) x 7-7/8″ (200 mm)*

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *ADA*
- *ASME A112.19.2/CSA B45.1*
- *ICC/ANSI A117.1*

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome

Specified Model

Model	Description	Colors/Finishes	
K-2356-8	8″ (203 mm) centers bathroom sink (shown)	❏ 0	❏ Other_____
K-2356-4	4″ (102 mm) centers bathroom sink	❏ 0	❏ Other_____
K-2356-1	Single-hole bathroom sink	❏ 0	❏ Other_____

Recommended Accessory			
K-8998	Adjustable P-trap		❏ CP

Product Specification

The drop-in bathroom sink shall be made of vitreous china. Bathroom sink shall be 22-5/8″ (575 mm) in length, 19-7/16″ (494 mm) in width, and 7-7/8″ (200 mm) in depth. Bathroom sink shall have 8″ (203 mm) centers (-8), 4″ (102 mm) centers (-4), or single-hole (-1). Bathroom sink shall be with overflow. Bathroom sink shall be Kohler Model K-2356-_____-_____.

ARCHER™

Technical Information

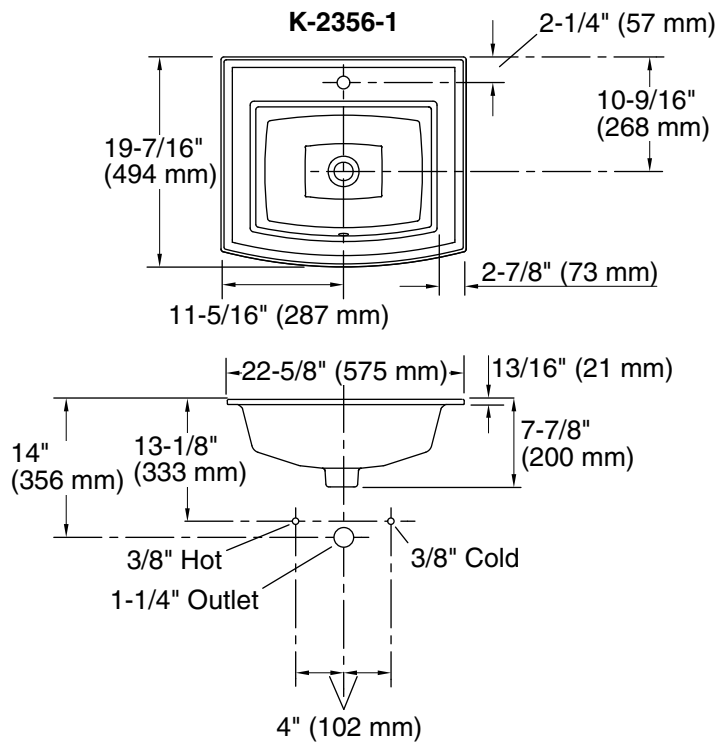| Fixture*:	
Basin area	16-7/8″ (429 mm) x 12-9/16″ (319 mm)
Water depth	4″ (102 mm)
Drain hole	Ø 1-3/4″ (44 mm)
* Approximate measurements for comparison only.	

Included components:	
Cut-out template	1051936-7

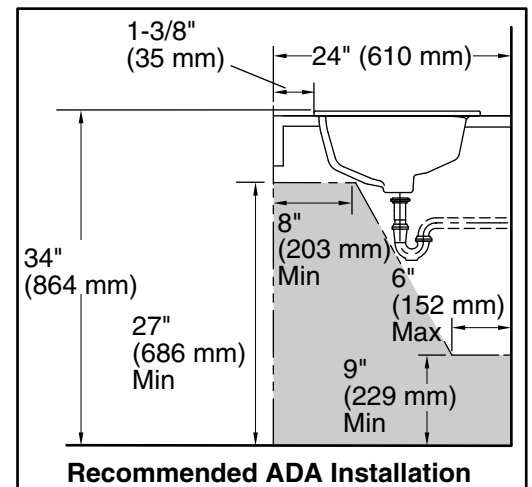| Holes	K-2356-8	K-2356-4	K-2356-1
Spout	Ø 1-3/8″ (35 mm)	Ø 1-1/4″ (32 mm)	Ø 1-3/8″ (35 mm)
Faucet	Ø 1-3/8″ (35 mm)	Ø 1-1/4″ (32 mm)	

Installation Notes

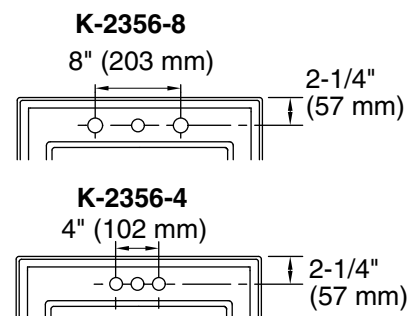Install this product according to the installation guide.

NOTICE: Countertop manufacturer or cutter **must** use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-4KOHLER). Kohler Co. is not responsible for cutout errors when the incorrect cut-out template is used.

K-2356-1

2-1/4" (57 mm)
10-9/16" (268 mm)
19-7/16" (494 mm)
2-7/8" (73 mm)
11-5/16" (287 mm)

22-5/8" (575 mm)
13/16" (21 mm)
14" (356 mm)
13-1/8" (333 mm)
7-7/8" (200 mm)
3/8" Hot
3/8" Cold
1-1/4" Outlet
4" (102 mm)

Standard Installation

1-3/8" (35 mm)
24" (610 mm)
34" (864 mm)
27" (686 mm) Min
8" (203 mm) Min
6" (152 mm) Max
9" (229 mm) Min

Recommended ADA Installation

K-2356-8
8" (203 mm)
2-1/4" (57 mm)

K-2356-4
4" (102 mm)
2-1/4" (57 mm)

Product Diagram

THE BOLD LOOK OF **KOHLER**®