

## Features

- Metal construction
- Available with 4-7/8" (12.4 cm) diverter bath spout with NPT or slip-fit connection
- Includes showerhead with arm and flange
- Includes faceplate and lever handle

## Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1

## BATH AND SHOWER FAUCET TRIM K-T15601



## Colors/Finishes



- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

## Accessories

- NA: None applicable

## Specified Model

Model	Description	Colors/Finishes		
K-T15601-4	Bath and shower faucet trim with lever handle and NPT spout	<input type="checkbox"/> CP		
K-T15601-4S	Bath and shower faucet trim with lever handle and slip-fit spout	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Required Accessories			
K-304-*	Rite-Temp® valve <b>OR</b>	<input type="checkbox"/> NA	
K-2971-KS	HiFlow Rite-Temp valve with stops		<input type="checkbox"/> NA
* For a complete listing of all the Rite-Temp valves, refer to the K-304-* Specification Sheet or Roughing-In sheet.			

Optional Accessories			
88526	HiFlow Rite-Temp® thin wall installation kit	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

## Product Specification

The single-control bath and shower faucet trim shall be made of metal construction. Product shall include showerhead with arm and flange, faceplate with lever handle, and 4-7/8" (12.4 cm) diverter bath spout with NPT or slip-fit connection. Faucet trim shall be Kohler Model K-T15601-\_\_\_\_\_-\_\_\_\_\_- and mixing valve shall be Kohler Model K-\_\_\_\_\_-\_\_\_\_\_-NA.

# CORALAIS®

## Installation Notes

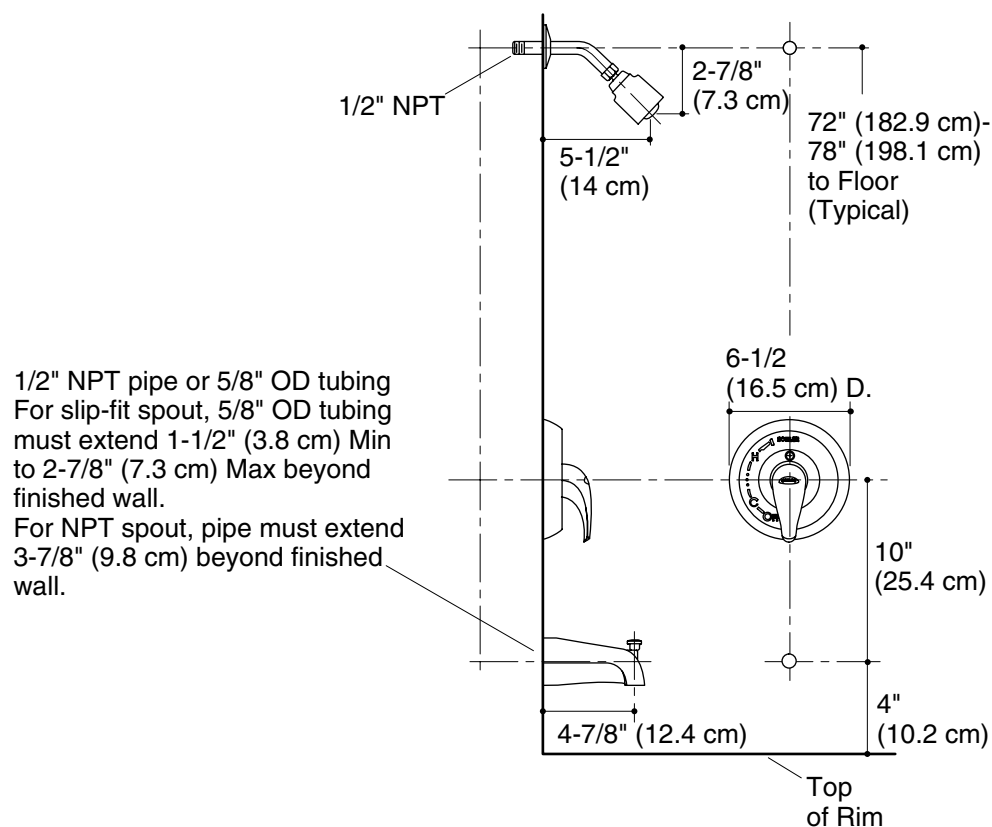
Install this product according to the installation guide.

**NOTICE: Risk of product damage.** Long screws, for installing trim, can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

Cap shower outlet if deck-mount spout, diverter, or handshower is connected to spout outlet.

Install straight pipe or tube drop of 7" (17.8 cm) to 18" (45.7 cm) with single elbow between valve and wall-mount spout.



**Product Diagram**