



Elmbrook™

Frameless sliding shower door
K-706851-8L

Features

- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Dual-sliding barn door style.
- Cushioned center guide provides smooth, quiet sliding action.
- Smooth, easy-to-clean wall jambs.
- 16-1/4" vertical handles.

Material

- Frameless, 5/16" (8 mm) thick Crystal Clear tempered glass door.
- Anodized aluminum hardware prevents rusting or corrosion.

Technology


- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.

Installation

- Fits opening widths 54-5/8" – 59-5/8" (1387mm – 1514 mm).
- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed.
- 3/8" (9.5 mm) out-of-plumb adjustability per side allows for simpler installation.
- For residential use only.
- Not for use in hospitality.

Included Components

Additional Components:
Hardware kit

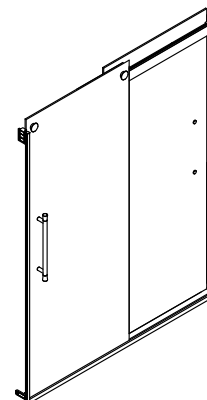

Codes/Standards

ANSI Z97.1
CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	SHP	
--	-----	--

	BL	
--	----	--

	BNK	
--	-----	--



Available Glass Options

Code	Description
------	-------------

L	Crystal Clear
---	---------------



Elmbrook™
Frameless sliding shower door
K-706851-8L

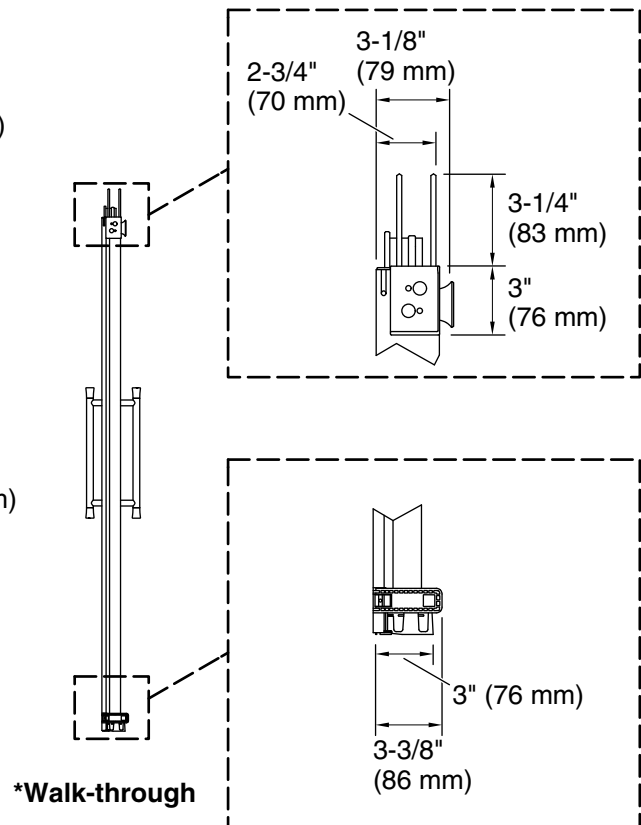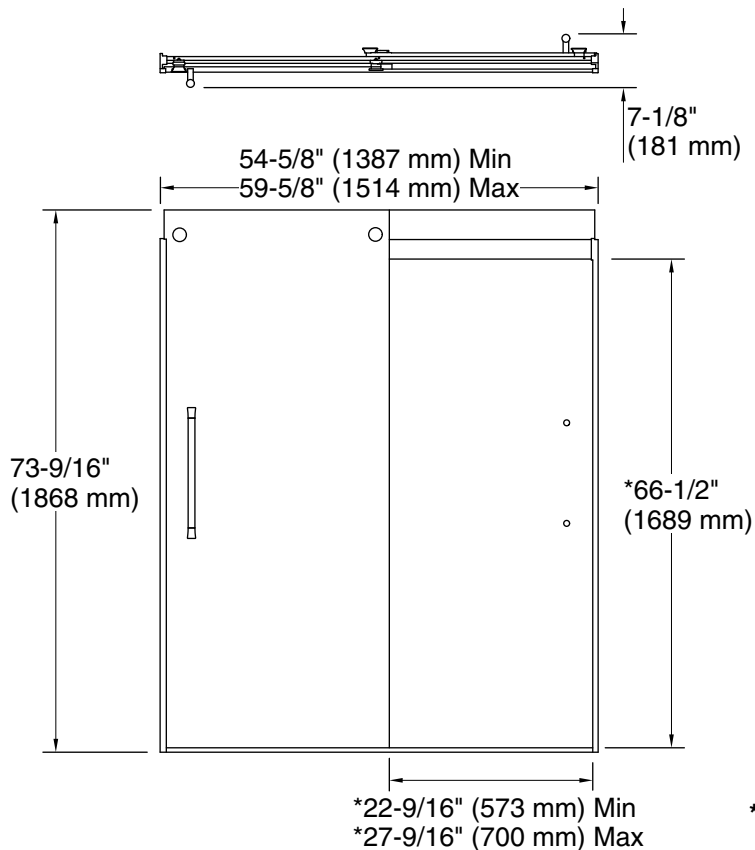

Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - Min: 54-5/8" (1387 mm)

Opening Width - Max: 59-5/8" (1514 mm)

Walk-through - Min: 22-9/16" (573 mm)

Walk-through - Max: 27-9/16" (700 mm)

Glass thickness: 5/16" (8 mm)

Glass coating: CleanCoat®

Notes

Install this product according to the installation instructions.

The vertical opening should be a minimum of 76-1/2" (1943 mm) to allow for installation clearance.