



PL-C Cluster 4-Pin Base

PL-C 18W/827/4P/ALTO 10PK

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum effciency and sleek design solutions are required.

Warnings and Safety

- · Lamp contains mercury.
- · Manage in Accord with Disposal Laws.
- See: www.lamprecycle.org or 1-800-555-0050

Product data

General Information				
Cap-Base	G24q-2			
Light Technical				
Color Code	827 [CCT of 2700K]			
Luminous Flux	1,200 lm			
Color Designation	Incandescent White			
Correlated Color Temperature (Nom)	2700 K			
Luminous Efficacy (rated) (Nom)	67 lm/W			
Color rendering index (CRI)	82			
Operating and Electrical				
Power Consumption	16.5 W			

Lamp Current (Nom)	0.230 A		
Controls and Dimming			
Dimmable	Yes		
Mechanical and Housing			
Net Weight (Piece)	0.122 lb		
Approval and Application			
Mercury (Hg) Content (Nom)	1.4 mg		
Energy Consumption kWh/1000 h	20 kWh		
Product Data			
Order product name	PL-C 18W/827/4P/ALTO 10PK		


Datasheet, 2023, November 1 data subject to change

PL-C Cluster 4-Pin Base

Full product name	PL-C 18W/827/4P/ALTO 10PK
Order code	383299
Material Nr. (12NC)	927907282730
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677110734


Numerator - Packs per outer box	10		
EAN/UPC - Case	60046677110736		

Dimensional drawing




Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
PL-C 18W/827/4P/ALTO	1-1/16 inch	1-1/16 inch	4-5/16 inch	5-1/16 inch	5-5/8 inch
10PK					


Photometric data

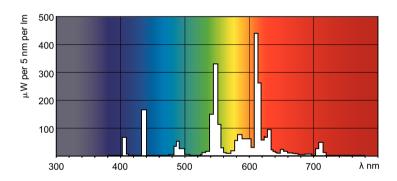

Spectral Power Distribution Colour - PL-C 18W/827/4P/ALTO 10PK

Lifetime

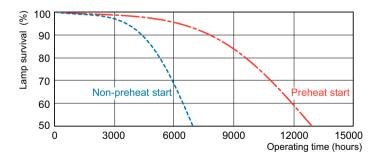




Life expectancy diagram - 3 hour cycle

Life expectancy diagram - 12 hour cycle

PL-C Cluster 4-Pin Base

Lifetime

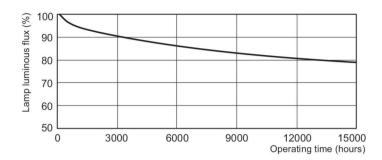

Lumen Maintenance Diagram - PL-C 18W/827/4P/ALTO 10PK



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.