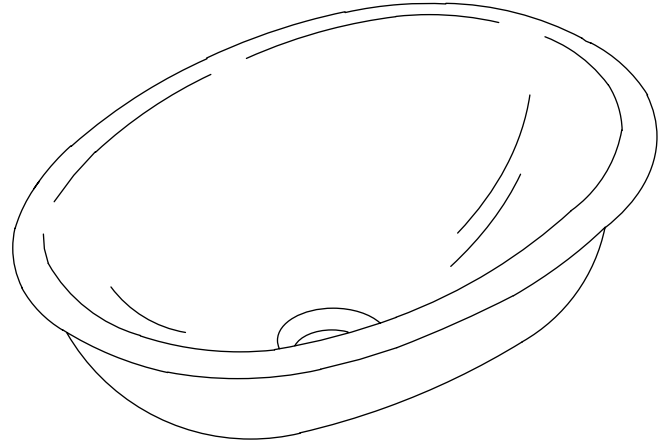# KOHLER®

Features

- *20-gauge stainless steel*
- *Self-rimming or undercounter*
- *Installation hardware included for each type of installation*
- *Without overflow*
- *Chrome plated brass tube and gasket included to cover the overflow hole in the drain assembly*
- *16-3/4″ (42.5 cm) x 11-3/4″ (29.8 cm)*

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *ASME A112.19.3/CSA B45.4*
- *ADA*
- *ICC/ANSI A117.1*

Colors/Finishes

- NA: None applicable

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-2611-MU	Oval lavatory – mirror finish	❏ NA	
K-2611-SU	Oval lavatory – luster finish	❏ NA	

Recommended Accessories			
K-8998	P-Trap	❏ CP	❏ Other_____

Product Specification

Oval lavatory shall be made of 20-gauge stainless steel. The lavatory shall be 16-3/4″ (42.5 cm) in length and 11-3/4″ (29.8 cm) in width. Lavatory shall be either self-rimming or undercounter installation. Lavatory shall include hardware for both types of installation. Lavatory shall be without overflow. Lavatory shall have a chrome plated brass tube and drain gasket to cover the overflow hole in the faucet drain assembly. Lavatory shall be Kohler Model K-2611-_____-_____.
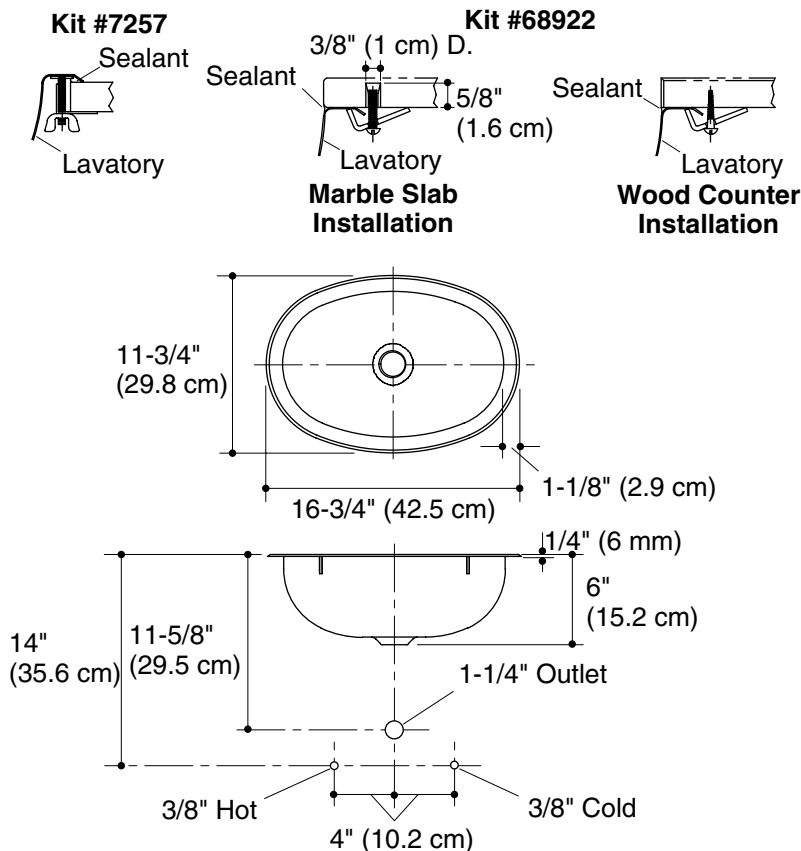
BOLERO®

Technical Information

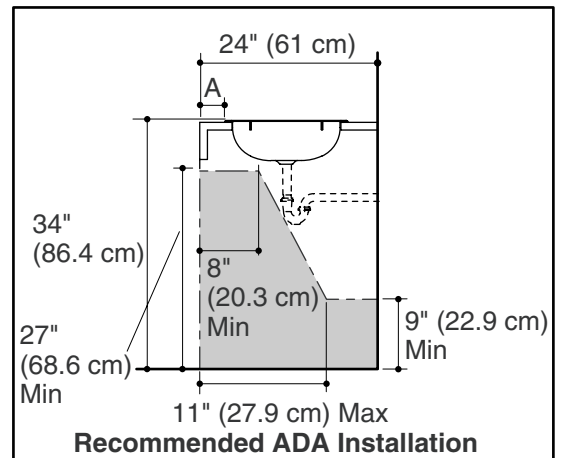| Fixture*:	basin area	water depth
Lavatory	15″ (38.1 cm) x 10″ (25.4 cm)	5-1/2″ (14 cm)
Drain hole	1-5/8″ (4.1 cm) D.	
* Approximate measurements for comparison only.		

Included Components:	
Basin clamp assembly (undercounter)	68922
Basin clamp assembly (self-rimming)	7257
Drain gasket	33507
Tube	1011037-CP
Cut-out template	111579-7

Installation Notes

Install this product according to the installation guide.

Kit #7257
Sealant
Lavatory

Kit #68922
3/8" (1 cm) D.
Sealant
5/8" (1.6 cm)
Lavatory
Marble Slab Installation

Sealant
Lavatory
Wood Counter Installation

Note: Waterproof unprotected overhang area of the underside of wood counter.

11-3/4" (29.8 cm)

16-3/4" (42.5 cm)

1-1/8" (2.9 cm)

1/4" (6 mm)

6" (15.2 cm)

14" (35.6 cm)

11-5/8" (29.5 cm)

1-1/4" Outlet

3/8" Hot

3/8" Cold

4" (10.2 cm)

24" (61 cm)

A

34" (86.4 cm)

8" (20.3 cm) Min

27" (68.6 cm) Min

9" (22.9 cm) Min

11" (27.9 cm) Max

Recommended ADA Installation

	A
Self-rimming (shown)	7" (17.8 cm)
Undercounter	7-3/4" (19.7 cm)

Product Diagram

THE BOLD LOOK OF **KOHLER**®